

16K S-100 RAM Card offer \$299

electronics today

FEBRUARY 1979

INTERNATIONAL

\$1.40*

NZ \$1.50

LIFE—OUT THERE?

Communicating with other worlds

MAST HEAD STROBE

16K S-100 RAM Card

Reaction Tester

Noise Reduction Systems

Computer show report

News, Communications,

Computers

**Check DICK SMITH
8-page
Catalogue inside!**

WHAT EVERYBODY
ASSUMED YOU
ALREADY KNEW
ABOUT TAPE RECORDING,
BUT NEVER TOLD YOU...

...UNTIL **maxell**®
simply excellent

YES

I would like
to learn more
about tape recording.
Please send me your 24
page Maxell Tape Booklet

...FREE!

Name

Address

Postcode


Post this coupon to Maxell Advisory Service,
Post Office Box 307, North Ryde, N.S.W. 2113

WT83/78

electronics today

INTERNATIONAL

Editorial: Les Bell
Managing Editor: Collyn Rivers

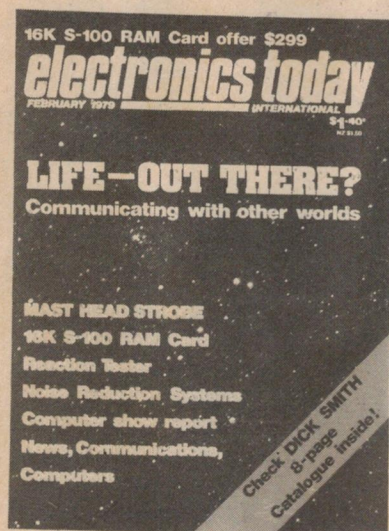

Cover: Dead motionless space — or is it?
See page 11...

PROJECTS

- 558: Mast-Head Strobe** 37
Avoid collisions — be seen.
- 142: High Current Power Supply** 42
Fifteen amp design uses switching techniques.
- 642: 16k S100 RAM Card** 53
The latest addition to our system.
- 557: Reaction Tester** 61
A product of synergistic beer drinking!

FEATURES

- Interstellar Communication** 11
What exactly are we doing about it?
- Noise Reduction Systems** 21
Review of the state of the art.
- Gain Control** 31
A practical look — part 2.
- Print Out: Melbourne Home Computer Show** 66
We came, we saw, we conquered!
- FRG-7000 Reviewed** 71
How does it compare with other receivers?

NEWS & INFORMATION

- | | | | |
|-----------------------|----------|-------------------------|-----------|
| News Digest | 5 | Mini Mart | 87 |
| Sound Briefs | 27 | Propagation Predictions | 90 |
| Amateur News | 77 | Ideas for Experimenters | 95 |
| SWL News | 81 | Readers Services | 102 |
| Kits for ETI Projects | 84 | Index to Advertisers | 102 |



A Modern Magazines Publication
* Recommended retail price only.


Registered for posting as a publication —
Category B

REAL POWER LINE UP

sanwa


N-501

2 μ A suspension movement — 0.05mA/1mV resolution. Double protection — fuse & Si diode. Constant 1M Ω input impedance (ACV) — RF-diode rectified current direct to movement.





U-60D

44 μ A movement — quality performance, diode protected. Temperature measurement of -30°C to +150°C with extra scale.



AX-303TR

44 μ A meter movement — Si diode protection against pulse input. Measures hFE (0-1000) by using the extra connector.




BX-505

Fast-response, 24 μ A movement — fuse & diode protected with high resolution factor. (0.4 μ A/scale division) Revised scale marking — intermediate readings readily determined.

CAM-250D

Clamp meter. Economical and multi-function. Single motion core arm. Compact yet provides 4 ranges on ACA and 2 ranges on ACV.



PDM-500/C

Performs as low resistance ohmmeter besides insulation tester. Measurement, scale calibration and battery check are all operated by pushbutton switches. Has constant voltage impressed irrespective of the value of resistance checked.

N-501

• \pm DCV 0-60m 0-0.3-1.2-3-12-30 0-120-300-1.2k-30k (w/HV probe) • \pm DCA 0-2 μ 0-0.3-0.3-1.2-3-12-30m 0-0.12-0.3-1.2-12A • ACV 0-3-12-30-120-300-1.2k \pm 2.5% Freq. 20Hz to 50kHz • ACA 0-1.2-12 Ω x 1-x10-x 100-x 1k-x 10k-x 100k (max. 200M) Batt. 1.5V x 1 & 9V x 1 • dB -20 to +63

AX-303TR

• \pm DCV 0-0.3-3-12-30-120-300-1200 • ACV 0-6-30-120-300-1200 • \pm DCA 0.60 μ -3m-30m-0.3-12 Ω x 1-x 10-x 1k-x 10k (max. 20M)

U-60D

• DCV 0-0.1-0.5-2.5-10-50-250-1k-25k (w/HV probe) • DCA 0-50 μ -2.5-

50-500m • ACV 0-2.5-10-50-250-1k • Ω x 1-x 10-x 100-x 1k (max. 5M)

BX-505

• \pm DCV 0-0.12-3-12-30-120-300-1200-30k (w/HV probe) • \pm DCA 0-30 μ -3m-30m-0.3-12 • ACV 0-6-30-120-300-1200 • ACA 0-12 Ω x 1-x 10-x 1k-x 10k (max. 20M)

CAM-250D

• ACA 6-30-60-300 • ACV 300-600 • k Ω 0-50k • Batt. 1.5V x 1

PDM-500/C

• V/ Ω rated 500V/100M • Scale range 0-0.1-100-200m (1st effective scale range underlined) • Ω 0-100 Ω • Power source AM or UM-2 x 3



WARBURTON FRANKI

• ADELAIDE 356-7333 • BRISBANE 52-7255 • HOBART 23-1841
• MELBOURNE 699-4999 • PERTH 277-7000 • SYDNEY 648-1711
• AUCKLAND N.Z. 79-7781 • WELLINGTON N.Z. 698-272

News Digest

A Message From The NSW Minister For Energy

Few people would question the right of the public to expect that all electrical goods offered for sale in the market place are electrically safe and will remain so through their normal working life.

The New South Wales Government therefore looks to all sections of industry engaged directly and indirectly in the supply of electrical articles they handle comply with recognised electrical safety standards.

Many appliances and some items of equipment have been specifically "prescribed" under the Electricity Development Act in New South Wales and are required to be examined and approved by the Electricity Authority of New South Wales or an approvals body in another State, and to carry an approval marking, prior to sale.

As the responsible Minister I also look to the Electricity Authority to monitor the general safety standard of electrical goods of different types offered to the public and to recommend application of legislative control where necessary.

I have been concerned to learn through reports of recent Electricity Authority inspections of electrical and electronic equipment of the type featured in the columns of some publications that many of the items examined do not comply with safety standards published by the Standards Association of Australia. Several cases have also been reported by the Authority of products which come within the scope of prescribing definitions being offered for sale without approval.

In particular it appears not to be realised that the prescribing definition for "Extra Low Voltage Transformer" includes a number of regularly advertised items such as power supplies of different types, antenna boosters and antenna rotators.

Most sections of the electrical industry supplying consumer goods


have developed a safety awareness through knowledge of S.A.A. safety standards and regular contact with regulatory authorities on approvals matters.

However it is clear that the popular electronics (hobby/enthusiast) section of the industry is giving insufficient attention to safety requirements.

It seems clear to me that the first need is for people operating in this section of the industry to be better informed of their responsibilities and obligations in the electrical safety area. In New South Wales closer contact with the Electricity Authority would certainly assist in this regard and I have asked the Authority to give priority to fostering that contact in its safety enforcement work.

Through these columns I also make a general appeal to manufacturers, importers and retailers in New South Wales to co-operate with the Authority and assist in ensuring that all popular electronics goods offered to the public fully comply with Australian safety standards.

Minister for Energy

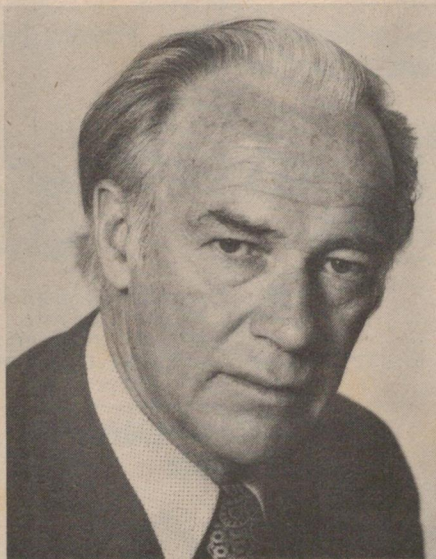

devices with polycrystalline gates but is said to be applicable to bipolar devices as well, the main advances having been made in the area of computer-controlled electron beam lithography, producing 0.1 μm accuracy.

Audio Cassette Records a Picture

A possible replacement for the ubiquitous overhead projector — through which a lecturer's scribbles can be thrown (optically !) onto a screen for the edification of hundreds of eventually eyestrained students — has been developed by Matsushita Electric Industrial Co.

The system allows a program of sound and line drawings to be produced using a light pen or keyboard controlling a TV display. This program is stored on cassette for later display.

The package, including the hardware required for the system plus a TV set and stereo cassette deck goes under the name of the Home Amusement Television System — wrong market, Matsushita?

CCD Camera Chip

Nippon Electric Co. and its affiliated company, New Nippon Electric Co. have produced a 1 cm^2 chip containing over 250 000 picture elements for use in domestic colour TV cameras.

New Nippon Electric hope to market a miniature colour camera using the device some time this year.

New Thyristor

Hutson Industries (US) have developed a thyristor with an integral Schottky diode. This is claimed to have improved spurious triggering performance over the more usual technique. The diode provides a non-ohmic path to triggering currents which have resulted from junction temperature change or step changes in input voltage.

Personal Computer Study

The University of Southern California has been given a grant of \$220 000 to study the future effects of personal computers on living standards and education.

Microwave Fusion

Nuclear fusion may be brought a step closer by a plan by MIT to boost the temperature of the plasma in their 'Tokamak' chamber by beaming microwaves in through what were previously diagnostic ports.

New Silicon IC Technique


At a recent meeting in the US, IBM announced that they are developing a new IC technology which will allow an order of magnitude increase in circuit density over existing techniques.

The new circuits described by the researchers use one tenth of the power

of existing devices and operate three to four times as fast.

The technology is believed to be capable of producing 256 000 memory locations — or 10 000 logic gates — on one 4 mm chip.

The research was done on MOSFET



Hurry! limited stock accessories CLEARANCE

TV Picture Tube Brightener

Clearance Price
99¢



Our normal retail price
2.89

•Give your picture tube a new lease of life

Black and white set/duodecal base. Parallel or series. Standard 12-pin tube renews brilliance, contrast, sharpness and detail. Just plug in!

15-637

Battery Clips

Clearance Price
69¢



Our normal retail price
1.29

Heavy duty, tight fitting, with screw terminals. 4.76cm long. Jaws open to 1.27cm. Pkt. of 8.

270-379

Subminiature Offset Lamp Assemblies

Clearance Price
10¢



Our Normal retail price
1.19

Set of 3 includes 2 red, 1 green jewel-type. Requires T-1 3/4 threaded bulbs. Mount in 5/16" holes.

272-344

Miniature Electrolytic Capacitors



Clearance Price
10¢
Our Normal retail price
79¢

Manufactured with welds at all critical terminations. 500 uF 16 WVDC axial type. Pack of 2.

272-1007

Miniature Dual Jack Coupler

Clearance price
10¢




Allows two cables terminating with miniature phone plugs to be connected together. Shielded type.

274-298

Flexible "Y" Adaptor

Clearance Price
99¢
Our Normal retail price
1.59




Two phone jacks connected in parallel to a standard 1/4" plug. 5 3/4" long.

274-306

Dual Stereo Headphone "Y" Adaptor


Clearance Price
1.99
Our Normal retail price
3.99



One end has two 1/4" phone jacks, connected in parallel to 1/4" phone plug. 10" long.

274-319

Adaptor Set



Clearance Price
50¢

For 1/4" phone plug to phono jack, 3/32" subminiature phone jack and 1/8" miniature phone jack.

274-356

Stereo-to-Mono headphone Adaptor



Clearance Price
50¢

Stereo jack to 3/32" ultra-mini phone plug.

274-362

Phone Jack

Clearance Price
10¢




Accepts standard 1/4" phone plugs. Versatile, panel or printed circuit mounting. 3-conductor. Closed circuit type.

274-376

Component/Console Knob


Clearance Price
90¢
Our Normal retail price
1.49



Gold-colour aluminium-alloy with black base, concave top, faceted grip. 2.69cm dia. 1.9cm deep. Double set screw.

274-422

4-Pole DT Miniature Slide Switch




Clearance Price
10¢

Our Normal retail price
99¢

Contacts 0.3 amps at 12VAC. Size 3.17x .95x1.42cm.

275-405

Mini Audio Amplifier Chassis

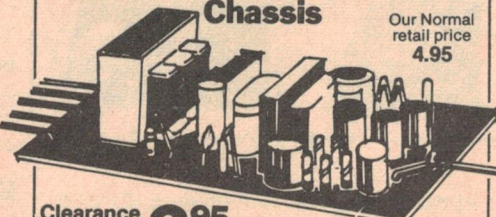

Our Normal retail price
4.95

Clearance Price
2.95

350mW output, 5 transistors

Dual inputs: 5,000/10,000 ohms. For 8-12 ohm load. 10.16x5.08x1.9cm. 15,000 Hz.

277-1557

Mini Test Clips



Clearance price
99¢ Each
Our Normal retail price
1.99 each

Miniature test clip on both ends for rapid interconnection of test points.

Black. 5.08cm long 278-1158
Red. 5.08cm long 278-1159

TANDY
ELECTRONICS

MINIMUM MAIL ORDER ACCEPTED 2.50 — AVAILABLE FROM ANY TANDY STORE OR PARTICIPATING DEALER

Skylab To Fall

NASA has terminated a contract with the Martin Marietta company for the development of the Teleoperator Retrieval System which it planned to use to keep Skylab in orbit.

The reason for this is that the space laboratory's orbit will decay sufficiently for it to re-enter the Earth's atmosphere sometime this year, long before it can be reached with a 'space robot' carried by the Shuttle and boosted back into a higher orbit.


The cost of the project was to be about \$US35 million, of which an estimated \$US22 million has already been spent. Martin Marietta are beginning a study to see what parts of the hardware already developed can be used for future Shuttle remote control modules.

Solar Power Station

The European Economic Community is doing its bit in the search for alternative energy sources and has funded the development of one of Europe's largest solar power stations. Ferranti Electronics Ltd. developed the station, using their newly-developed MST300 36 cell solar panels (which generate 14.4 V at 1.1 A each) and can deliver 2 kW dc. The dc current is stored in a battery and inverted to 240 Vac at 50 Hz.

Single Beam Colour Tube

A single-beam colour TV set from Matsushita uses a novel method to synchronise colour information. Periodic stripes of phosphor emit UV instead of visible light, allowing the TV to sense the beam's position on the tube face. This allows a more efficient use of energy — the set runs on 7 W.

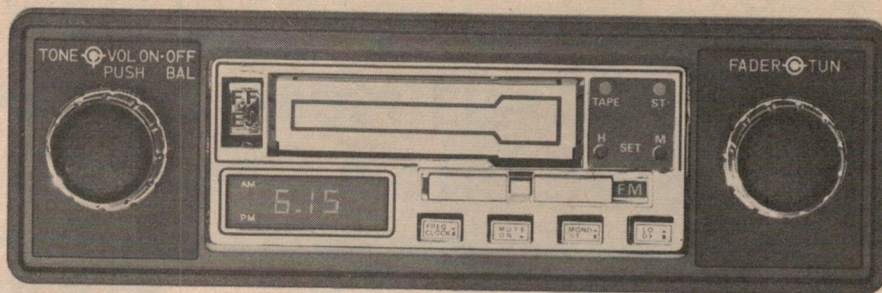

Atari Personal Computers

Latest TV game manufacturer to break into the home computer market is Atari, Inc. a major supplier of programmable games. Two models are being released — the \$450 model 400 and the \$900 model 800 — during the third quarter of 1979. Both the machines use an external domestic TV and are based on 6502-type micro-processors, which, incidentally, are also used in their video games.

Synergistic Beer Drinking

On the second Wednesday in every month, a strange age-old Australian custom takes place in the Bayswater Hotel. Huge numbers (we hope) of technically-minded people meet to discuss the state of the beer. Amongst other things, of course. If you have any suggestions for clean, sensible, worthwhile projects, forget ... er, bring them along and we'll see what we can do you for, or rather do for you.

We're also available for answering questions ("How long have you been an alcoholic ...?") and discussing ETI matters in general ("Mine's a middie ..."). The Bayswater Hotel is situated in Bayswater Road, Rushcutter's Bay, Sydney (just through the King's Cross tunnel, on the left by the Rushcutter Bowl). The next Synergistic Beer Drinking session will be on Wednesday, 14 February at about 6.00 p.m.

Bit-slice Nova

The advent of bit-slice micro-processors has caused somewhat of a revolution amongst minicomputer manufacturers, who can now make low cost minis with very powerful instruction sets — some are even compatible with the IBM 370. The latest manufacturer to use bit slices is Data General, whose new Nova 4 line operates up to 50% faster than the previous Nova 3 series, yet sell for about half the price. The Nova 4 also features an expanded instruction set, and is priced from US\$2500 up, depending on the model.

Digital Radio Display

An in-car cassette player/radio with a digital clock has been released in which the clock display doubles as a frequency readout. The unit, claimed to be the first of its kind in Australia, operates on AM and FM bands and will sell for around \$280.

On touching the tuning knob the clock display changes to one of tuned frequency and will remain so for five seconds after the knob has been released, after which time it will revert to a time display. The radio, called the Ferris SN-2910, was launched by Intag Marketing Corporation Pty. Ltd., 42 Grantham Street, West Brunswick, Victoria 3055. Tel. 387 3844.


US Scientist For Keynote Address

A distinguished American electronics and telecommunications scientist, Mr. Donald Spencer Bond, of Princeton, New Jersey, will be the Keynote Speaker at IREECON '79, the 17th International Electronics Convention, to be held in Sydney from August 27 to 31, 1979. This was announced by Dr. John Hiller, Chairman of the IREECON '79 Management Committee of The Institution of Radio and Electronics Engineers Australia (IREE).

Mr. Bond has a particular link with Australia; he was the author of the 1977 report, "The opportunity for television programme distribution in Australia using earth satellites", which resulted, after its presentation to the Australian Government, in the setting up of the Government's Task Force, National Communications Satellite System.

Mr. Bond, 69, listed in the American Men of Science, and author of numerous published papers, was formerly with the Radio Corporation of America (RCA), and the David Sarnoff Centre in Princeton. He was involved in the USA corporate-wide planning studies of satellite and telecommunications systems for business and military applications, and from 1958 to 1961 was a member of the staff of the

TDK's Revolutionary New Product — The HD-01 Head Demagnetizer Built into a Cassette Shell.

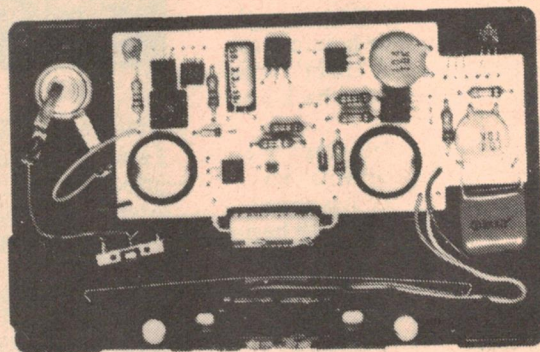


Simply load the HD-01 into any cassette recorder as you would a standard audio cassette and depress the 'play' button.

The HD-01 Head Demagnetizer was designed by TDK for easy, convenient head demagnetization of any cassette deck, insuring crystal-clear, perfect recordings every time.

The TDK HD-01 Head Demagnetizer features:

- A unique cassette format, designed to insure complete compatibility with any cassette deck.
- Powerful de-gaussing circuit instantly demagnetizes recorder heads the moment the play button is depressed. The above diagram depicts the oscillating waveform applied to the recorder heads, removing every trace of residual magnetism in only one second!
- A red LED (Light Emitting Diode) built into the HD-01 cassette shell will light up the moment your recorder heads have been completely demagnetized.



The TDK HD-01 Head Demagnetizer ends forever the fuss and mystique surrounding the demagnetization process and is much easier to use than conventional wand-type tools. Anyone can use the HD-01 and get perfect results every time.

The TDK HD-01 Head Demagnetizer is completely self-contained, battery operated and portable. It can be taken anywhere and stored with your present audio cassettes. The TDK HD-01 is ideal for all types of cassette decks especially those with heads located in hard to get at places such as:

- recorders with heads positioned in the front of the unit but which point to the rear.
- those with 'pop up' loading mechanisms which can not be detached, thus making the heads almost inaccessible.
- cassette decks with heads positioned laterally with respect to cassette loading (car decks are good example of this type).
- automatic loading machines.



WHY IS DEMAGNETIZING SO IMPORTANT?

TDK, in conjunction with many cassette deck manufacturers, recommend that cassette decks be maintained on a regular basis. Cleaning the heads, capstan and pinch rollers is one important aspect of that maintenance program. — Periodic demagnetizing, about every thirty hours of use, is the other. Failure to do so will cause a build-up residual magnetism on the heads, which can seriously affect tape and machine performance in the following critical areas:

1. The noise level in the low and midrange frequencies is increased by 5 to 7dB, thereby reducing the overall signal-to-noise ratio.
2. Pre-recorded tapes can also be affected with midrange and high frequency distortion, as well as attenuation by as much as 2 to 6 dB, virtually eliminating any hopes for clear sound reproduction.

The interaction of these factors will not only prevent both the tape deck and tape from displaying their true performance capabilities, but will severely limit the Dynamic Range properties of both, rendering pure sound reproduction an impossibility.

The following comparison data clearly demonstrates the effect of residual magnetism on recorder heads in the areas of both Noise Level and Frequency Response.



TECHNICAL DATA

Major Components:


Transistors (8)
Diodes (2)
LED (Light Emitting Diode)

Power Supply — Control Section — Oscillation Section — Head Section

Specifications:

Maximum Magnetic Flux Density	200 Gauss
Oscillation Frequency	630 Hz
Shape	(External Dimensions)
	Conform to IEC Standards
Battery for Power Supply	G-13 1.5 volt, Silver Oxide Battery (option)

Schematic Diagram of HD-01

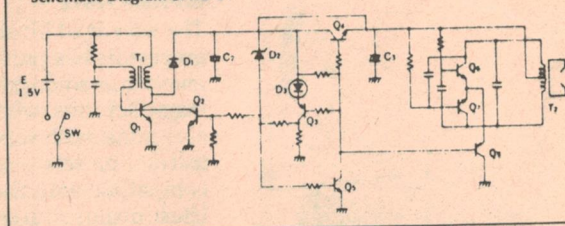

For additional information, direct all inquiries to:

CONVOY INTERNATIONAL PTY. LTD.
4 Dowling Street, Woolloomooloo, N.S.W. 2011
Telephone: (02) 358-2088. Telex: AA23111



weapons systems evaluation group in the office of the US Secretary of Defence. He is now retired.

IREECON '79 is being organised by The Institution of Radio and Electronics Engineers Australia (IREE), founded originally in 1924 and granted a Royal Charter in 1967. IREE is the only chartered Institution in Australia concerned with the interests of both professional electronics engineers and the skilled and certified engineering technologists and technical officers in the electronics field.

The Convention, to be held at the University of NSW, will be attended by scientific, engineering and technical delegates from many countries.

In addition to the presentation and discussion of approximately 160 papers, there will be an Exhibition with extensive displays of technical electronics equipment by leading Australian and overseas manufacturers and distributors.

Low-loss Bearings

Zero friction bearings are claimed to be possible by the use of a system developed by SKF Industries Inc. The Active Magnetic Bearing System uses a magnetic field under electronic control to keep the shaft at a constant distance from the bearing under varying load conditions.

Analogue Processor

A new multi-purpose device from National, the LH0094, performs mixed multiplication and exponentiation on voltage inputs. The device is fast (10 kHz bandwidth) and accurate (rated accuracy 0.05%).


The output voltage will be equal to:

$$E_0 = E_1 \times (E_2/E_3)^m$$

where E_1 , E_2 and E_3 are input voltages in the range 0.1 to 10 volts. A precision thin film resistor network in the unit allows squaring and square root extraction by strapping particular pins together.

The device comes in a hermetic 16 pin DIP package and should find applications in a wide variety of industrial applications. It can be used for linearisation of thermometric devices and flow meters, or even for audio companding. The device operates from ± 5 V to ± 22 V.

The cost in 100-up quantities is \$23 for the CD (industrial) temperature range. Delivery is ex stock to six weeks from *NS Electronics, PO Box 89, Bayswater, Victoria. 3153*. Further information is available from Ed Schoell (03) 729-6333 or Chris Mason (02) 93-0481.

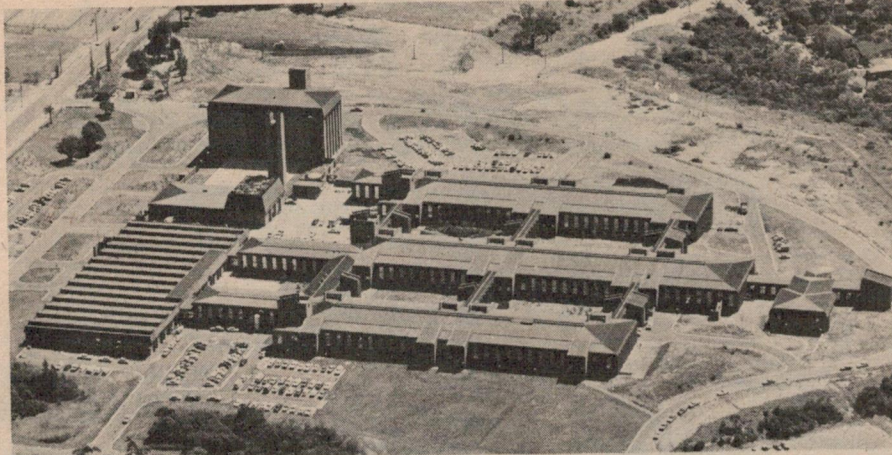

NEW CSIRO LABORATORY

Special open days have been arranged on Monday and Tuesday 26 and 27 February 1979 at the newly completed CSIRO National Measurement Laboratory, following the Official Opening by the Governor-General.

The Laboratory, the largest in CSIRO, took four years to build. It employs 370 professional and technical staff.

Over 50 selected laboratories will be open for inspection, including a display of holograms, lens-making facilities, computer-aided design facilities, numerically-controlled machinery, an optical research tunnel and a host of other technical exhibits.

The National Measurement Laboratory is in Bradfield Road, Lindfield. There is plenty of parking space on the very large site.

The Laboratory will be open from 2.00 to 5.00 pm and 6.00 to 9.00 pm on both days. Enquiries to 467 6330, 467 6329.

Laser Xerox

Xerox have produced a photocopier which, when linked to a computer, can produce full-colour output with a resolution of 0.01 in on plain paper or transparent film.

The 6500 colour copier uses a scanned laser and can produce 6.4 in by 13.75 in colour copies in under 20 seconds or monochrome copies in under 7 seconds.

Electric Vehicle Battery

NASA has developed a high energy density battery for use in electric vehicles which could run 100 miles on a 20 minute charge. The nickel/zinc battery should cost about \$50 per kWh and has the additional advantage that the metals used in it are recoverable, reducing the effective cost of a new battery.

New Display Material

The display medium of the future may well be a piezoelectric ceramic material called PLZT, which will switch about a thousand times faster than LCD, has an inherent memory which will store an image for several days and has a 5:1 better contrast ratio than LCD. When used with light filters, it can even give displays of contrasting colours.

ETI/Unitrex Calculator Contest

December's contest was so easy we were surprised at how few entries we received! The answer was of course one page — the first page of volume 22 lies beside the last page of the next volume with the covers in between (try it!). The winner was Mr Murphy of Victoria.

This month's problem concerns a rather limited processor, whose accumulator works in decimal and holds four decimal digits. There are five possible instructions:

Instruction	mnemonic	before	after
rotate right	RR	6789	9678
rotate left	RL	6789	7896
complement	CM	6789	3210
increment	IN	6789	6790
decrement	DE	6789	6788

Starting with the number 1297, the processor executes five instructions — one of each type but not in the order shown above. At the end of this the accumulator holds 8693. After the first two instructions had been completed, the most significant digit of the accumulator held a 2.

In what order were the instructions executed? Write the mnemonics in order of execution on the back of an envelope, along with your name and address, seal it and send it to us: ETI Magazine (Unitrex Contest February), 15 Boundary Street, Rushcutters Bay, NSW 2011. The closing date is 2nd March.

**Dick Smith says:
Just look at this
INCREDIBLE HOME
ENTERTAINMENT
COMPUTER!**



**BE ONE OF THE FIRST TO ENJOY THIS AMAZING
COLOUR COMPUTER — CONNECTS TO ANY TV SET.**

* EDUCATIONAL!

Your children can actually learn or improve mathematics: addition, subtraction, multiplication and division right there on the TV screen. It even tells you when you're wrong or right!

* EXCITING!

You can play incredibly complex games like **BLACKJACK!** Imagine: it actually draws your cards, raises the bet, 'pays' you for a win... **you won't believe it!**

* NEW!

Over twenty thousand sold in the USA since its release a short time ago — now available in limited quantity here in Australia. Don't miss out!



Cat X-1200

\$259⁰⁰

* Easy terms available!

Imagine! For only \$259 you get a real computer — the heart of this unit is an incredibly powerful Fairchild microcomputer containing thousands of transistors. No, this is not just another TV game — this incredible machine has a mind of its own, giving versatility and performance not even thought possible just a few months ago!

Basic price includes the computer console with two inbuilt games (tennis and football), the two 8-way hand control units, an AC power supply plus a **BONUS** 'noughts & crosses' game cartridge.

Call in today for a demonstration

SPECIAL 7 DAY TRIAL OFFER
Purchase this Fairchild Video Home Entertainment Computer with two or more cartridges and try it in your own home for 7 days. If you're not completely satisfied, return it to us in the condition you received it and we'll refund your money in full!

TERMS:

A pleasure. To approved personal shoppers, terms are available from \$29.00 deposit and \$2.90 p.w.

MAIL ORDERS:

Yes. We'll send this unit anywhere in Australia for \$5.00 extra — game cartridges post **FREE** with unit. (If purchased separately p&p \$2.00)

**ADD MORE
EXCITEMENT!
ALL OF THESE
FULL COLOUR
CARTRIDGES
ARE NOW
AVAILABLE!**

**ONLY
\$24⁵⁰
EACH.**

BLACKJACK Cat X-1201

You can play the TV (the bank) by yourself or with a partner. Try to break the bank at your home without losing a cent!

DESERT FOX Cat X-1203

Try and destroy the desert fox without being blown up yourself (tank game) — or try the shooting gallery game on this cartridge.

MAZE Cat X-1204

Four great games: Maze, Jailbreak, Blind-man's-bluff and Trail-blazer. Games that will test your skill and give you real fun.

BASEBALL Cat X-1205

All the skills and thrills of the real game — played in the comfort of your own home. For two players.

SPITFIRE Cat X-1206

Two games: Solo the red baron is hot on your tail, or for two players you try to shoot each other out of the sky.

SPACE WAR Cat X-1207

Can you escape the piercing laser beams? The aliens from outer space are out to get you. Just how good are you?

MATH QUIZ 1 Cat X-1208

Teach the kids addition and subtraction — or brush up on your own basic arithmetic skills.

MATH QUIZ 2 Cat X-1209

Multiplication and division on this cartridge. It poses the problems — it's up to you to come up with the answers

PINBALL CHALLENGE Cat X-1217

Remove different coloured walls of bricks to become the pinball wizard.

BACKGAMMON Cat X-1213

All the rules of this exciting game are programmed on the cartridge. No cheating! Also has Acey Ducey (a variation of Backgammon)

TORPEDO ALLEY Cat X-1211

Sink as many ships as possible. Or play Robot War — try and escape the robots by destroying them in a force field.

SONAR SEARCH Cat X-1214

Use your ears to try to sink the enemy's hidden fleet. Hours of fun for everyone.

DODGE IT Cat X-1216

Dodge a varying number of hidden balls to win this game. Tests your endurance!

MEMORY GAME Cat X-1215

Number come and go. But can you remember where they were? A modern version of Kim's game.

MAGIC NUMBERS Cat X-1210

Guess the right digits in the right places to win. You can play the clock or play for points.

DRAG RACE Cat X-1212

Don't eat dust: stomp on your accelerator and beat your opponent in an exciting drag race.

DICK SMITH ELECTRONICS

SYDNEY

125 York Street, SYDNEY. Ph. 290-3377

147 Hume Hwy, CHULLORA. Ph. 642-8922

162 Pacific Hwy, GORE HILL. Ph. 439-5311

30 Grose Street, PARRAMATTA. Ph. 683-1133

MELBOURNE

399 Lonsdale Street, MELBOURNE. Ph. 67-9834

BRISBANE

656 Bridge Road, RICHMOND. Ph. 42-1614

ADELAIDE

166 Logan Road, BURANDA. Ph. 391-6233

203 Wright Street, ADELAIDE. Ph. 212-1962



SHOPS OPEN 9AM to 5.30PM
(Saturday 9AM — 12 noon)
BRISBANE 1/2 Hour earlier

ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY

Many lines available from the
Dick Smith Electronics Centres at

GRACE BROS

Broadway • Bondi • Chatswood • Liverpool
Miranda • Mt Druitt • Parramatta • Roselands
and Warringah Mall



MAIL ORDERS P.O. Box 747, Crows Nest, N.S.W. 2065. Post and packing extra.

Dealers across Australia.

Communicating with other worlds

Can we detect signals from intelligent beings in other solar systems? By Brian Dance.

ABOUT 20 YEARS AGO scientists realised that their equipment might be able to detect suitably powerful radio emissions from intelligent beings on planets in other solar systems which may be many light years away from us. Attempts to detect Extra-Terrestrial Intelligence (appropriately abbreviated ETI!) have already been made in the USA, Canada and the USSR without success, but much more work with larger aerials is required to provide workers in this field with a reasonable chance of success.

Apart from the Search for Extra-Terrestrial Intelligence (SETI), drawings and radio signals have been sent into space outside the solar system in the hope that they will eventually be detected and understood by intelligent beings many light years distant. Unfortunately the chances of two way communications with such beings are very remote, since the nearest star is a few light years away and most planetary systems are at much greater distances. Thus anyone sending a message from the earth to anywhere but one of the very nearest of the stars would be dead by the time any reply could be returned to the earth.

Attempts have also been made to detect signs of life within the solar system. In particular, the Viking spacecraft which landed on Mars conducted prolonged tests to try to detect life or the chemicals associated with life. Although no organic molecules that could be the past or present constituents of living things were found and the results were generally rather discouraging, they were certainly not conclusively negative as regards the possibility of life on Mars.

Communication Techniques

It seems likely that there are three possible ways in which we may be able to communicate with intelligent beings from outside the solar system. The first way involves a direct meeting of space vehicles or a landing by them on the earth. Unless the other beings have a

longevity which far exceeds that of man, the journey time would make this method quite impossible. Many people do not fully appreciate how much vaster are the distances involved in interstellar space than those within the solar system. Light takes about 8 minutes to reach us from the sun, but about 180 000 years to cross our galaxy and some thousands of millions of years to reach us from the farthest known objects.

As we require something which will convey information quickly, the obvious thing to use is electromagnetic signals which travel at the speed of light. We can only send signals by this technique and not material objects, but generally it is far more sensible to send information on how to construct an object rather than to send the object itself over such vast distances. Should one use light, infra-red, radio waves or some other form of electromagnetic radiation? Radio-waves are to be preferred, since the energy required per transmitted photon is relatively low.

The third possible communicating technique involves the acceleration of sub-atomic particles to velocities very near to the speed of light, but as far as is known this technique has not yet been tried. If particles which can travel faster than light (known as 'tachyons') are ever discovered, one can only wonder whether they could be used in an extra-terrestrial communications system if they can be produced relatively easily; however, at the moment such a suggestion is nothing more than pure speculation.

It has been suggested that we should avoid transmitting any signals into space which would inform possibly hostile intelligent beings of our location. It is generally felt, however, that we can take comfort from the fact that any intelligent beings would be more interested in sharing information with us and co-operating with us as far as possible rather than in attacking us as in science fiction stories. In any event, it seems likely that it would take them so long to arrive here that our civilization would be in a very

different state by the time they could reach us.

Basic Problems

Let us first consider the basic problems associated with receiving radio signals from outside the solar system, since any of our attempts to send messages are not likely to bring any result for an enormously long time. Any radio signals reaching the earth from outside the solar system are likely to be extremely weak owing to huge distances involved and it therefore follows that SETI projects require the use of the largest radio telescopes in the world.

One is left with decisions to make on the direction in which one should point the telescope, the frequency or frequencies which one should attempt to receive, the bandwidth one should use and perhaps even the time at which one should attempt to receive any transmissions. In the work on SETI which has been performed up to the present time, the telescopes have usually been pointed towards some star in our galaxy which is not excessively distant and which astronomers feel may possibly have a satellite system on which life could have evolved in some form or other.

In general astronomers have concentrated their searches in the regions of stars of the same or similar spectral classes as the sun. It has been felt that if a star has a luminosity much greater than that of the sun, then the lifetime of any planetary system associated with that star is probably too short to have enabled life to have developed to the point where intelligent civilizations have evolved. Stars of luminosity much smaller than that of the sun seem to have rather violent coronal activity which would probably result in any associated planetary system being rather inhospitable to most imaginable forms of life. Other stars have departed from the main sequence as a result of a super-nova or nova explosion and SETI workers have tended to disregard these because it seems doubtful whether

any living species could survive the catastrophic event of such an explosion in the star.

Frequency

As the signals from the regions of other stars would be very weak, it is obviously important to choose a frequency where the background noise from natural sources is relatively small, so that the weakest possible signal can be detected. Some of the most important factors which determine the choice of frequency are shown in the graphs of fig. 1. Noise levels can be expressed in terms of temperature, since a high temperature corresponds to a relatively large amount of molecular agitation and hence to a high level of electro-magnetic noise.

Fig. 1 clearly shows a relatively low total noise level in the region of 0.5 GHz to 10 GHz and most SETI work has been done in this frequency region. However, let us look at the various noise contributions which are themselves rather interesting. One should remember that both scales in fig. 1 are logarithmic and can therefore accommodate a very wide range of noise levels and frequencies.

The 2.76 K cosmic background radiation has a fairly constant level up to about 50 GHz, but then falls off in intensity. This strange form of radiation is believed to be the remnants of the

radiant energy formed in the most fantastic explosion ever when the whole of the matter of the universe was formed in a small space somewhat more than ten thousand million years ago. Indeed, the very existence of this radiation is the strongest piece of evidence we have to indicate that the universe was formed in an unimaginable intense explosion. Perhaps it is rather remarkable that this noise from the creation of the universe can affect our choice of frequency for communication with other intelligent beings.

The non-thermal background noise level is mainly due to the synchrotron radiation emitted by particles spiralling around the galactic magnetic fields. The level of this noise varies somewhat with the galactic latitude, the extreme lines shown in fig. 1 being for galactic latitudes of 10° and 90° . The atmosphere of the earth acts as a further source of noise, since molecules of water and oxygen absorb and re-radiate energy with broad peaks, at frequencies of about 22 GHz and 60 GHz respectively. The total sky noise at an earth station is shown by the curve with the pronounced minimum.

If a suitable telescope were set up on the moon or in another place far outside the atmosphere of the earth, there would be no contribution from the atmospheric noise. The noise levels

would therefore be much lower at frequencies above about 10 GHz, but at frequencies above about 60 GHz the energy per photon of the radiation becomes so large that the quantum noise level exceeds the cosmic background noise level. The quantum noise level is associated with the fact that noise is generated by the arrival of each photon or quantum of radiation which comes in "packets" of energy rather than as a steady continuous wave.

The Water Hole

The region of minimum extraneous noise has been named the "Water Hole", since it contains frequencies strongly associated with water — one of the most vital chemicals in our form of life. One of the most important frequencies is that of 1.42 GHz (21 cm) which is emitted when the spinning electron in an atom of hydrogen (the most abundant element in the universe) spontaneously flips over so that its direction of spin is opposite to that of the proton in the nucleus of the same atom.


The emission from the free radical hydroxyl (formula $-\text{OH}$) consists of a number of closely spaced frequencies at about 1.665 GHz. Water consists of hydrogen chemically joined to hydroxyl — hence the name 'water hole'.

Most SETI workers agree that frequencies in the water hole are a good place to commence a search for interstellar radio signals. Apart from the low noise in this frequency region which permits communications over the greatest possible distances at specified transmitter power levels, it may well be that the intelligent beings with which we wish to communicate also have a life system based on water and that they have therefore selected frequencies in this region for their attempts at interstellar communications.

It has been suggested as long ago as 1963 that the 1.42 GHz hydrogen frequency could be a logical one to use for work of this type. Professor Robert S. Dixon of the Ohio State University Radio Observatory has shown that this might be reasonable at the present time, but that the emission of noise from hydrogen at this frequency could seriously degrade the noise levels in receivers of improved performance which we hope will be available in the not too distant future. The fact that the hydroxyl frequency is not a single one renders it a non-unique frequency for SETI purposes.

At present there is little man-made noise in the water hole band of frequencies, although there is some

Fig. 1. The water hole in the radio spectrum from the sky can be clearly seen in the 1 GHz to 10 GHz region with a minimum near to the H and OH characteristic lines.

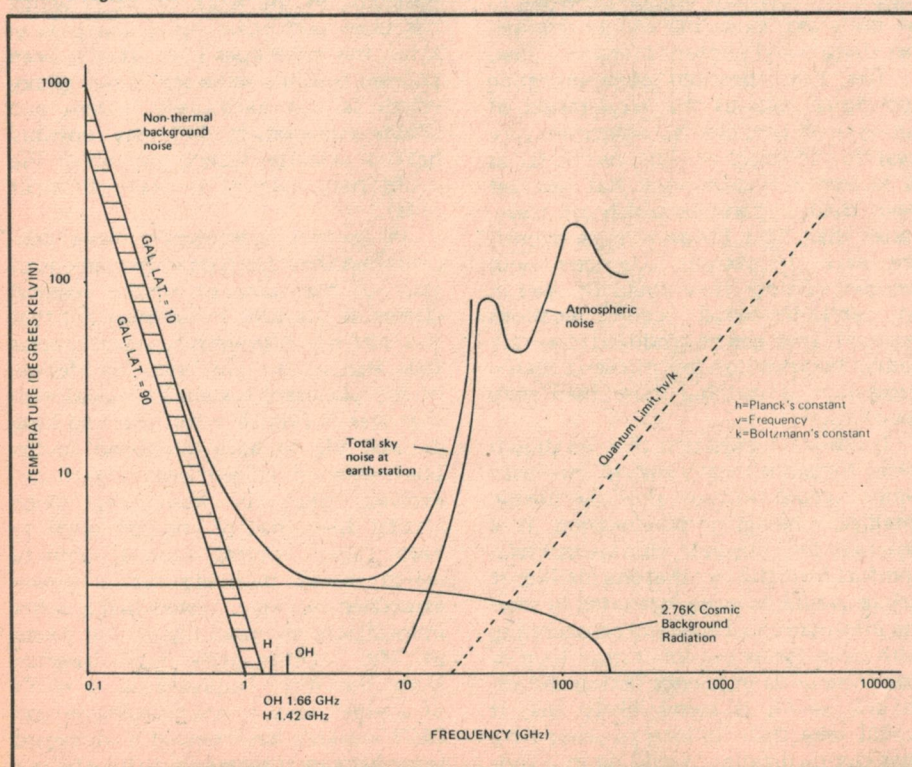

Communicating with other worlds

minor use by weather and maritime satellites. Many SETI workers consider that the water hole frequencies should be kept clear from 1.4 to about 1.7 GHz, but a proposal for a system of Global Positioning Satellites involves the use of this frequency band. SETI workers have said this would be "polluting the water hole". The term water hole is usually reserved for the frequencies lying between the natural frequencies of hydrogen and the hydroxyl radical.


Signal Types

What types of signal should we expect to receive from other planetary systems and how could we recognise such signals as originating from intelligent life? The SETI workers are basically searching for coherent signals, possibly modulated. For example, our own radio transmissions have a coherent carrier wave, although the modulation present inevitably involves a finite bandwidth. The presence of this type of signal would almost certainly indicate it is not of natural origin and hence would imply the existence of intelligent life elsewhere in the universe.

There are three basic types of signal from other planetary systems which we may be able to detect. The first type of signal is leakage of a signal into space in just the same way that our own radio and television signals leak away to a greater or lesser extent through our ionosphere. Indeed, a spherical wave of radio signals of a fairly wide range of frequencies has been travelling away from the earth over a period of rather over 50 years. In the case of more highly developed societies, it seems probable that they have been transmitting such signals for a far longer period (although one hopes they have not been stupid enough to destroy themselves by nuclear war).

A second type of signal we may possibly be able to receive is some form of inter-stellar or even inter-galactic communications between highly developed communities. Such reception would be by chance and it must be assumed that highly developed communities would employ very high gain antennae which are unlikely to be pointing towards our solar system. Thus the chances of intercepting such messages cannot be regarded as being very high.

The third type of signal we may hope to receive is an intentional one directed at our solar system by a society in a distant stellar system in order to notify us of their presence. It is also possible that such a society may send signals out isotropically (that is, all directions

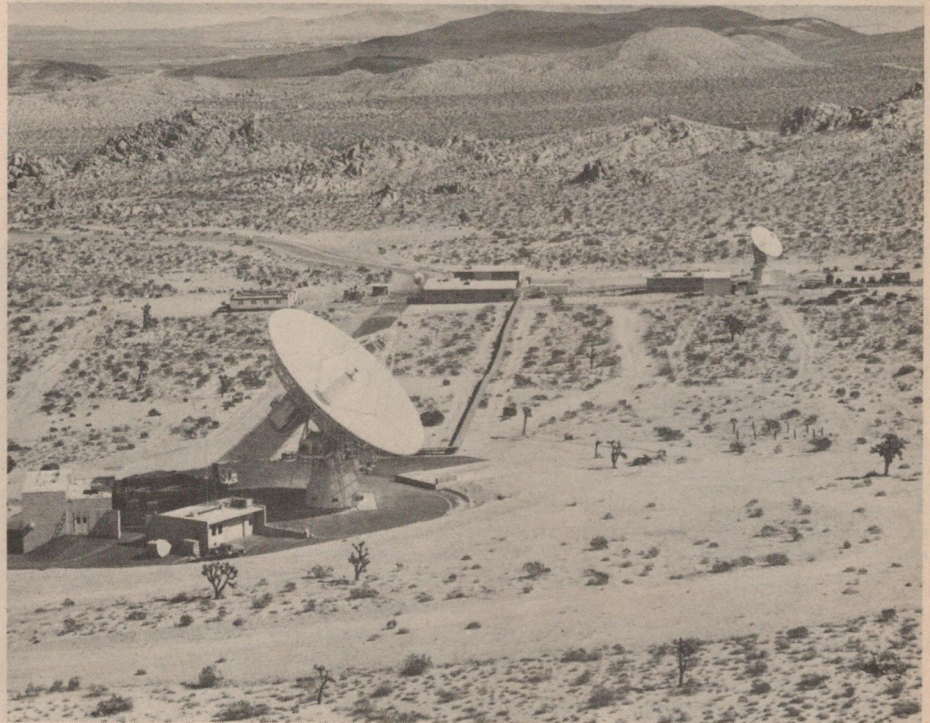

The Goldstone 26m Deep Space Network Antenna may be used in an all-sky search. (Courtesy Jet Propulsion Laboratory).

at equal intensities), but unless they have transmitters of extremely high power, such signals would be so weak at the earth that it is doubtful if we could detect them.

It is difficult to make an estimate of the optimum bandwidth one should select for SETI work. Narrow bandwidth receivers (possibly with a bandwidth of a few Hz) enable very weak signals to be detected, since the narrower the bandwidth of the channel used, the less the external noise which can penetrate into that channel. (Someone once said: "The wider you open the window, the more the amount of dirt that flies in." and this certainly applies to radio bandwidths). Unfortunately if one has a very narrow bandwidth channel, it takes a very long time to examine an appreciable range of frequencies. Modern plans are to use both narrow and wide band search techniques together with spectrum analysers containing a million or more channels for the simultaneous examination of numerous frequencies by computer techniques.

The Drake Equation

Before spending millions of dollars on SETI programmes, one would like to

have some approximate estimate of the number of civilizations which are likely to possess the technology to be able to communicate with us. Such an estimate can be obtained by the use of the Drake equation. Professor Frank Drake is one of the leading SETI workers and is now Director of the National Astronomy and Ionosphere Centre of Cornell University. His equation reads:

$$N = R_* f_p n_e f_i f_c L$$

where N is the number of existing civilizations possessing the interest and capability for inter-stellar communications


R_* is the mean rate of star formation averaged over the lifetime of a galaxy

f_p is the fraction of stars with planetary systems

n_e is the mean number of planets in each system with an environment favourable for the origin of life

f_i is the fraction of suitable planets on which life does develop

f_c is the fraction of life bearing planets on which intelligence together with

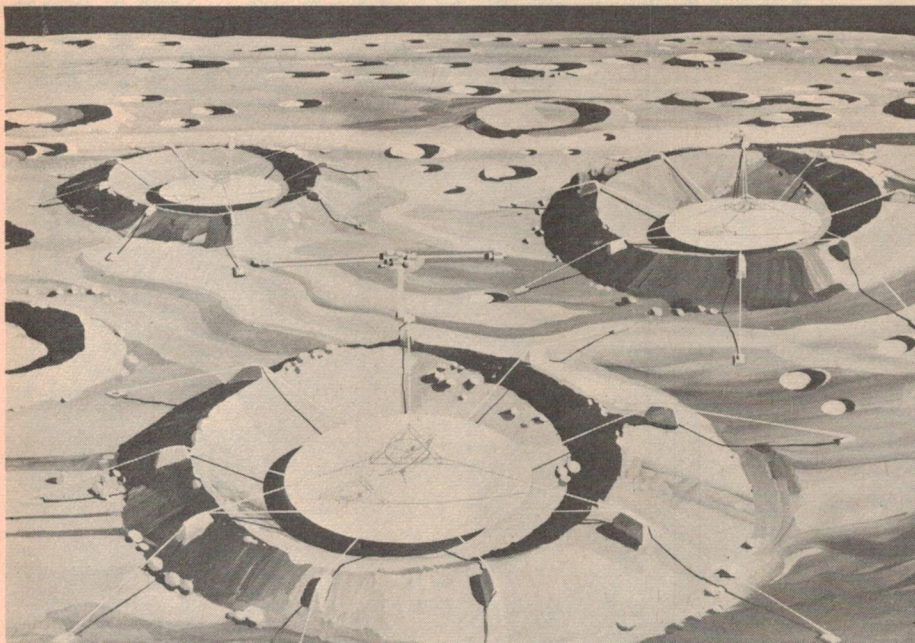

A complex Cyclops array on the far side of the moon containing 216 large (200 m) reflecting radio telescopes with a control building in the middle of the array. The lunar base is in the middle distance towards the left hand side and is quite small. (Courtesy NASA Ames Research Centre).

manipulative abilities appears

f_c is the fraction of the planets evolving advanced technical civilization

L is the lifetime of the technical civilization (perhaps very difficult to estimate!).

The estimate obtained from the use of this equation will obviously vary widely according to the estimated values employed. However, most estimates now place the value of N around one million, these being distributed amongst approximately 500 million stars in our galaxy.

SETI History

Perhaps the first important paper on SETI work appears in *Nature* in 1959 under the title "Searching for Interstellar Communications" by Philip Morrison and Giuseppe Cocconi. It is interesting to note that they suggested the use of the 1.420 MHz hydrogen frequency, since it is a unique standard frequency which must be known to every observer in the universe.

Eight separate major efforts have been made by US, Canadian and Russian radio astronomers since 1960 to detect extra-terrestrial signals from intelligent beings. Although each search has concentrated on one or more specific frequencies in the range from 600 MHz to 22.2 GHz, the receivers used were those designed mainly for normal radio astronomical work which involves the detection of incoherent naturally produced radiation rather than


the coherent radiation the SETI workers were seeking.

Although no confirmed sources of signals from intelligent beings outside the solar system have yet been detected, it has been estimated that the number of stars which have been examined is about 0.1% of the number which would have to be investigated if there is to be a reasonable statistical chance of detecting extra-terrestrial intelligent signals.

Project Ozma

The first SETI work was led by Frank Drake using the 1 420 MHz hydrogen

An array of three antennas constructed in natural craters on the far side of the moon; each contains a receiving platform similar to that used in the Arecibo antenna. (Courtesy NASA Ames Research Centre).

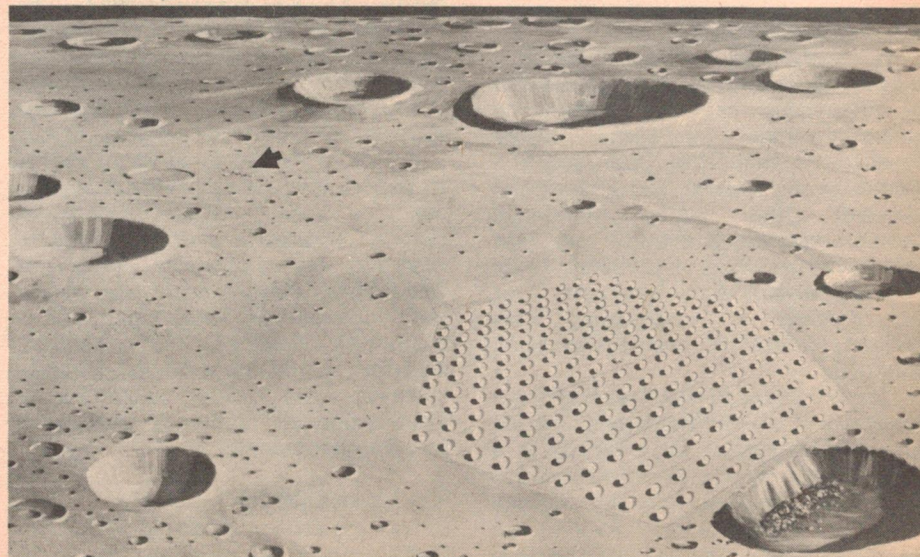

frequency. It was named "Project Ozma" after the ruler of Oz — a far away place populated by exotic beings. Drake employed a bandwidth of 100 Hz and aimed his receiver at the two stars Tau Ceti and Epsilon Eridani which are both some 11 light years away from the earth. The observing time was some 150 hours using a 26 m (85 feet) diameter steerable antenna in 1960.

Project Ozma II is a much more extensive one which has also been carried out at the National Radio Astronomy Observatory, Green Bank, West Virginia. In this work some of the largest and most sophisticated radio telescopes in the world have been used; they include the 92 m (300 feet) diameter partially steerable antenna completed in 1962 at a cost of about 1 million dollars and the 43 m (140 feet) diameter equatorially mounted, fully steerable antenna which was completed in 1965 at a cost of some 14 million dollars.

Project Ozma II was commenced in late 1972 under the leadership of Benjamin M. Zuckerman of the University of Maryland and Patrick Palmer, of the University of Chicago, the intention being to run the project for about two years. However, the Observatory made more time available and the project continued until December 1976 with an examination of about 700 stars at distances of up to some 65 light years. The prime targets were main sequence stars of the F5 to K5 class. The observations were carried out at 1 420 MHz, each of 384 separate receivers being tuned to a slightly different frequency near to the

Communicating with other worlds

1 420 MHz hydrogen line. A total bandwidth of 4 kHz was used.

At the end of the Project Ozma II work, about 12 stars showed some unexplained phenomena which were probably due to terrestrial radio interference, but which could have been due to faint signals from intelligent beings. These stars will doubtless be examined very carefully at some later date.

Russian Work

Russian workers have been very interested in SETI since V.S. Troitsky of Gorky University examined 12 nearby sun-like stars in 1968, but the Soviet Academy of Sciences has announced proposals for SETI work extending up to 1990. The 1968 work used the Gorky University 14 m (45 feet) diameter antenna at 1420 MHz and 1 GHz. Sensitivity with their 13 Hz bandwidth was about $2 \times 10^{-21} \text{ W m}^{-2}$.

In 1972 Troitsky commenced work with a "Eurasian" network of omnidirectional antennas and the Gorky antenna to look for pulsed signals from the whole sky at frequencies of about 1.87 GHz, 1 GHz and 600 MHz. Ambitious Russian plans include a search of the whole radio astronomy window from 1 GHz to 100 GHz. The stars involved are to include likely ones in our vicinity, the nearby galaxies in our local group and an all-sky survey without any particular pre-selected objects. Both ground based and orbiting SETI telescopes are planned, whilst a search may be attempted for the infra-red radiation from extra-terrestrial heat generating projects such as one would expect from a region inhabited by intelligent beings.

Canadian Work

Dr. Bridle and Dr. Feldman commenced work at Canada's nationally owned Algonquin Radio Observatory in Algonquin Park, Ontario in 1974. They are using a 46 m (150 feet) diameter telescope to examine many of the nearest sun-like stars, but the frequency employed is 22.2 GHz — the emission frequency of the water molecule — which is much higher than that used by other workers.

Arecibo

Some SETI work has been carried out using the largest telescope in the world at the Arecibo Observatory in Puerto Rico which has a diameter of 305 m (500 feet) in the air. The reflector panels consist of 38,778 individual panels each a little over 1 m by 2 m

in size; each panel must be positioned with an accuracy of better than 1 mm.


In 1967 a British post-graduate student noticed a mysterious regular pulsing signal from space and there was much speculation as to whether this was a signal from intelligent life beaming a message to earth. The Arecibo antenna was used to show that this signal was coming from the first pulsar to be discovered and that it was in the Crab Nebula.

Two of the best known SETI workers, Prof. Frank Drake and Prof. Carl Sagan, have used the Arecibo

antenna to examine the radiation from whole galaxies for signs of signals from intelligent life. Although the use of this technique has enabled them to examine many millions of suitable types of stars simultaneously, it would require a signal of very great intensity to enable frequencies of 1 420 MHz, 1 653 MHz and 2 380 MHz, but the time allocated to this work is relatively small. The distances involved are of the order of ten million light years, so two way communications would be very difficult!

It is interesting to note that if the

Fig. 2. The Arecibo message consisted of 1679 binary digits which can be arranged to form an image of the type shown on the left hand side if each '1' is a small dark square and each '0' is a white square. The decoded message is shown on the right hand side.

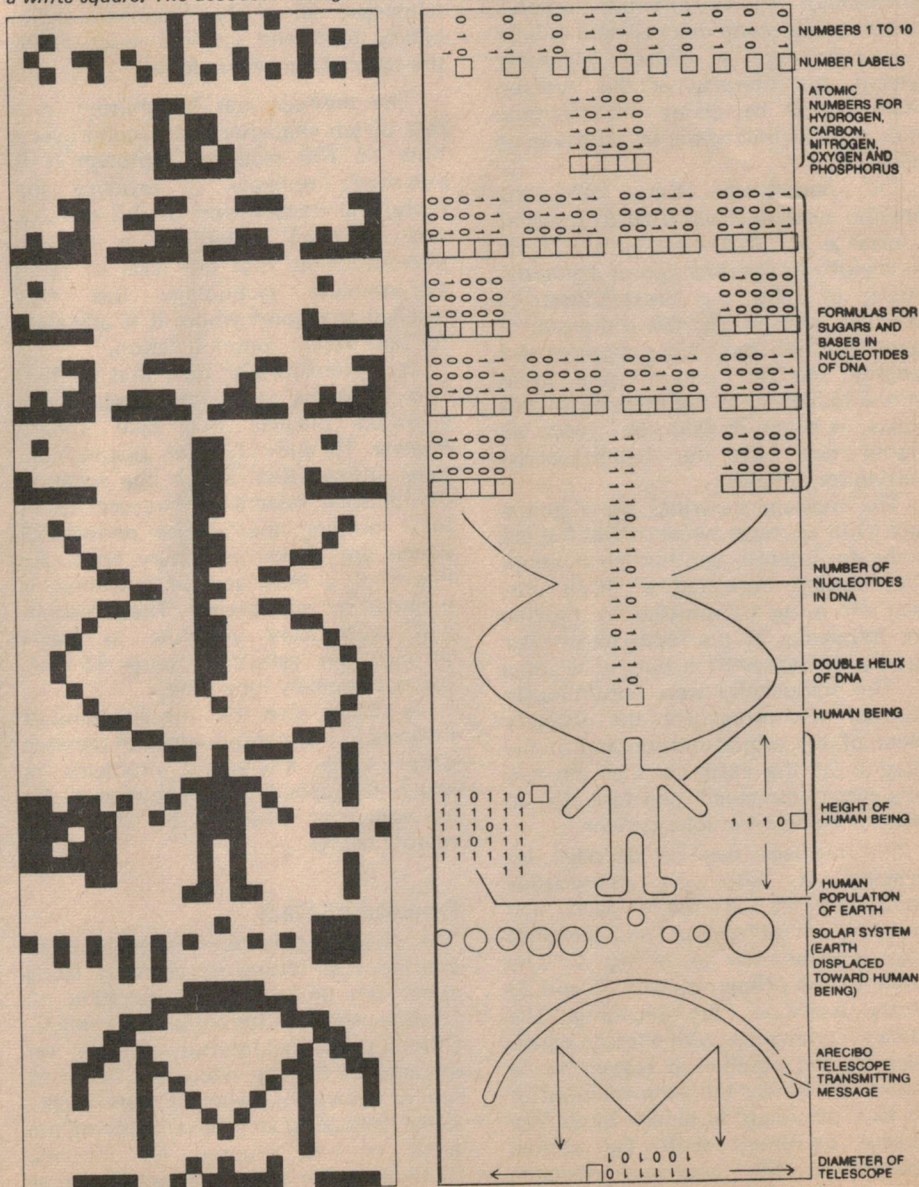

Arecibo telescope were to transmit at a rate of one bit per second with a 1 Hz bandwidth, a similarly sensitive radio telescope could receive the signal if it were placed anywhere in our galaxy.

There are four transmitters available for use with the Arecibo dish: (i) 5-12 MHz for ionospheric investigations; (ii) 50 MHz for ionospheric and lunar work; (iii) 430 MHz for ionospheric, lunar and planetary radar studies and (iv) 2380 MHz for planetary radar observations. The last of these is a 450 kW transmitter operating in the S band and, when its power is concentrated into a narrow beam by the reflecting dish, the effective radiated power in the direction of the beam is approximately one hundred times the total power production of all of the electrical generating plants in the world. This corresponds to an effective radiated power approaching one hundred million megawatts. In a distant planetary system the intensity of this Arecibo beam would be about ten thousand million times that of the sun at the same frequency.

On November 16th, 1974 the Arecibo telescope was used to transmit a message at 2380 MHz with a 10 Hz bandwidth in the direction of a globular cluster of stars, the Great Cluster in Hercules, Messier 13; this is a group of some 300 000 stars whose apparent size roughly matches that of the beam width. However, as the distance of this Cluster is some 25 000 light years, we should not hold our breath whilst waiting for a reply!

The message describes some points about life on earth which it was felt are likely to interest another civilization. The message consisted of 1679 bits, each bit being transmitted by moving the frequency of the radio transmitter slightly to represent a binary '0' or a '1'. The frequencies were continuously adjusted to correct for the Doppler effect of the orbital motion and of the rotation of the earth so that the two frequencies remained constant to an observer outside the solar system.

The message can be decoded by breaking it into 73 consecutive groups of 23 characters each and arranging these groups in sequence under one another as in fig. 2. The choice of the prime numbers 73 and 23 greatly facilitates the decoding. The message commences with a lesson which describes the numbering system to be employed, namely by commencing with the first ten digits in binary form. The message continues with the atomic numbers of five common elements

found in living things. Information about sugars and DNA follows together with a sketch of a human being and the solar system. Finally some information on the Arecibo telescope is given.

This account of the Arecibo message has been considerably abbreviated, as can be seen from fig. 2. For example the line extending from the head to the foot of the image of the human being is accompanied by the binary number 14; this signifies that the human is 14 units of length in size, the only possible unit of length being the wavelength of the transmission, 126 mm making the height of the person just under six feet or somewhat less than 2 metres. On the left hand side of the human is a number denoting the human population of the earth (over 4000 million), whilst the number 2430 at the base of the message denotes the number of wavelengths across the reflector of the telescope. All of these numbers are in binary form and can tell much about the state of our technology.

The message was transmitted at a rate of ten characters per second over a time of 169 seconds. Although it is extremely unlikely to produce any reply, the transmission of this message was intended rather as a definite demonstration that our level of radio astronomical technology has now reached the point where it is adequate for inter-stellar communication.

It is interesting to note that the first two messages sent into space were engraved plaques that ride aboard Pioneer 10 and 11. Each plaque contains information about the location of our solar system with respect to 14 local pulsars, the precise periods of which are shown in binary code. An image of a man and of a woman is included in each plaque. These plaques will presumably continue to travel through our galaxy at some 16 km/s for an extremely long time.

It can be seen that the encoding of information in various types of message poses some interesting problems in order that decoding can be carried out as easily as possible by intelligent remote beings.

Proposed US Work

The Arecibo telescope reflector is an enormous structure, its diameter being about ten times that of the 30 m reflectors used for international communications using the Intelsat satellites. An increase of the diameter by a factor of ten is equivalent to an increase in the signal collecting area by a factor of the order of one hundred. Nevertheless, SETI researchers want far larger systems

in their attempts to achieve their first success.

Workers at the Jet Propulsion Laboratory planned to survey the whole sky in a SETI project scheduled to commence in 1980, but it now seems certain that the few million dollars required for such a preliminary survey will not be made available in the near future. It was intended to use the existing 26 m diameter antennas of the US Deep Space Network (see "Deep Space Communications", ETI, July 1978) with two megachannel spectrum analysers per antenna. Apart from the SETI work, sophisticated computer techniques were to be used to gather radio astronomical data. The vast amount of incoming data required the equipment to be designed so that the amount of stored data would be kept to a minimum and the information would be handled on a real time basis. Unattended operation of the SETI equipment was planned. The search was to be made simultaneously at 4 million discrete frequencies in 300 MHz channels at frequencies between 1 GHz and 25 GHz. All of the sky visible from the Goldstone site (80% of the complete heavens) would have been covered.

The flux levels detectable by this proposed Jet Propulsion Laboratory work are about 10^{-20} to 10^{-23} W/m², but a simultaneous search targeted at selected nearby stars was proposed for NASA's Ames Research Centre. The higher sensitivity Ames work should be able to detect signals at levels down to 10^{-27} W/m² over frequencies in the 1.4 to 1.75 GHz band, but the total bandwidth would not be more than 10 MHz and the bandwidth of individual channels no more than 4 Hz. The Ames workers would use the Arecibo Observatory and possibly other antennae.

Project Cyclops

One of the most ambitious SETI projects yet proposed is known as Project Cyclops. This is intended to be suitable for not merely detecting high power signals (such as those from our own Arecibo antenna), but also to allow eavesdropping on much lower intensity signals which other civilizations use for their own communications (like our radio and television transmitters). In order to be able to receive such signals from stellar systems at distances of a few hundred light years from the earth, enormous antenna systems are required.

It seems unlikely that it would be a practical possibility to construct a single reflecting dish of adequate size and therefore it has been suggested that the Cyclops project could employ an

enormous array of radio telescopes, each of which may be about 100 m in diameter. For example, as many as 1 500 such 100 m dishes could be spread out in lines over an area of perhaps 65 km² and connected together electrically to provide the same performance as a single dish of enormous dimensions.

Project Cyclops was initiated as a study by the NASA Ames Research Centre and Stanford University in 1971 under the leadership of Dr. John Billingham and Dr. Bernard Oliver. There have been vast improvements since then in solid state memories, microprocessors, wideband maser low-noise amplifiers, etc. Nevertheless the full project would cost something of the order of 10¹⁰ dollars, although we have all the required technology already developed. The major cost would be the antennas which would employ reflectors of an area over twenty times that of the Arecibo dish.


Non-terrestrial Antennas

Many SETI workers favour the use of antennas in space or on the far side of the moon. One of the attractions of using antennas on the far side of the moon is the absence of radio interference from the earth. One could probably construct Arecibo-type antennas in some of the natural craters of the moon so as to avoid much of the work involved in moving the surface material of the moon. As in the case of the Arecibo dish, this use of natural craters can greatly reduce the construction costs.

Other proposals include the construction of antennas in orbit around the earth. Such antennas would have the advantage that they would not be affected by interference from the atmosphere of the earth, but they would be susceptible to interference by earth stations (unless screened from it).

It must be made clear that neither NASA nor the US congress is seriously considering the financing of such enormous Cyclops projects at the present time. The availability of such an antenna system of enormous sensitivity would contribute not only to SETI work, but also to many other radio astronomical projects. For example, it would provide unrivalled data for the compilation of detailed star catalogues, it could be used for greatly improving the Deep Space Network used for communicating with spacecraft on interplanetary flights and for radar studies of bodies within the solar system. The Arecibo antenna has been used for radar mapping of the surface of Venus, since

Communicating with other worlds

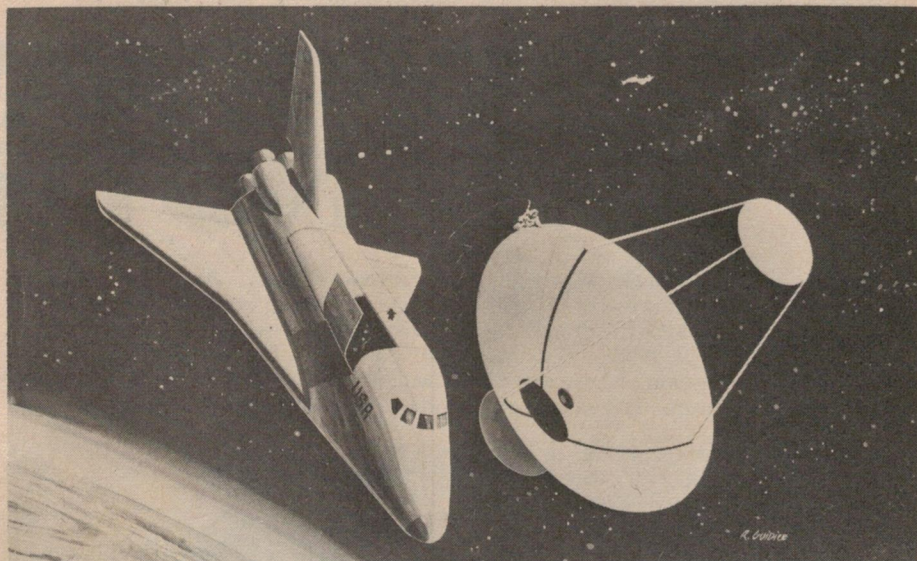

An artist's concept of a relatively small (30 m diameter) space SETI parabolic antenna which could be conveyed into low earth orbit and erected by means of a single Shuttle flight. (Courtesy NASA Ames Research Centre).

the radio waves can penetrate through the thick clouds of the planet and the reflections received provide information about the surface of the planet. A more powerful Cyclops system could be used for radar mapping the surface of the more distant planets. Other work for a Cyclops array would include radio frequency interference studies.

Conclusion

The Search for Extra-Terrestrial Intelligence has not yet been successful, but this is not particularly surprising in view of the small number of star systems which have been examined with high sensitivity equipment. Some people (including many of those who control scientific finance) may feel that the SETI project is rather frivolous and perhaps even a silly one. However, there are many scientists very strongly committed to work in this field — a point which can be demonstrated by the fact that a new journal, *Cosmic Search* devoted entirely to SETI work will be published from January 1979 under the editorship of Dr. Robert S. Dixon who is well-known for his SETI work at the Ohio State University Radio Observatory.

Dr. Frank Drake at times feels somewhat cynical about the cuts in the SETI budgets. Indeed, he has commented that the search for extra-terrestrial intelligence begins with the search for

intelligence here on earth! He feels that at the present time there is a very well qualified group of people who are keen to carry out an extensive SETI project and, if no funds are forthcoming for a year or more, it is likely that many of these people will move to other work. If you were paying taxes in a country considering becoming involved in an extensive SETI project, how would you feel about paying an extra amount (far less in total than that to place a man on the moon) in order that the project could proceed? SETI work will doubtless continue, but more funds are required if it is to proceed at a rate which is likely to bring success within the lifetime of most people who are living today.

SETI is still in its infancy. Who knows whether more advanced civilizations have found methods of communicating by means other than electro-magnetic radiation? For example, neutrino beams are interesting because they can pass through matter very easily, whilst there has been much speculation on the existence of gravity waves and the possibility of tachyons has already been mentioned. At present electro-magnetic frequencies near the water hole seem to offer the best possibilities. One wonders whether special cosmic languages already exist and whether the long transmission times will make us cosmic archeologists.

WE'LL GET YOU INTO ELECTRONICS.

ONE WAY OR ANOTHER.

At International Correspondence Schools, we have at least 15 career courses you can take in electronics and other inter-related fields, like computers and television. These are the fields of the future that you *should*

progress in now. And they are all ideally suited to home study. And ICS, being the largest institution of its kind in the world, has access to the latest world-wide developments and among the best teachers Australia has to

offer. So, if you're interested in one or more of the courses below, mail the coupon to ICS, and we'll send back everything you need to begin a more successful career.

1 Basic Electronics course for a sound knowledge of radio theory and the industrial applications of electronics.

2 Electronic Technician course, with specialist courses in Audio, Radio, Hi-Fi; Communications/Broadcasting; Electronic Computer Servicing; Industrial Electronics.


3 Electronic Instrumentation and Control Systems course for electronics technicians interested in industrial instrumentation and control.

4 Electronic Technology, a program that will fit the ambitious technician for wide variety of jobs.

5 Electronics Maintenance for basic principles and electronic theory, followed by a practical section of maintenance procedures and techniques.

6 Radio Electronic Telemetry covers electrical and electronic aspects of telemetering. Employment opportunities abound in this very modern field.

7 Amateur Radio Operator's Certificate of Proficiency prepares you for the examination

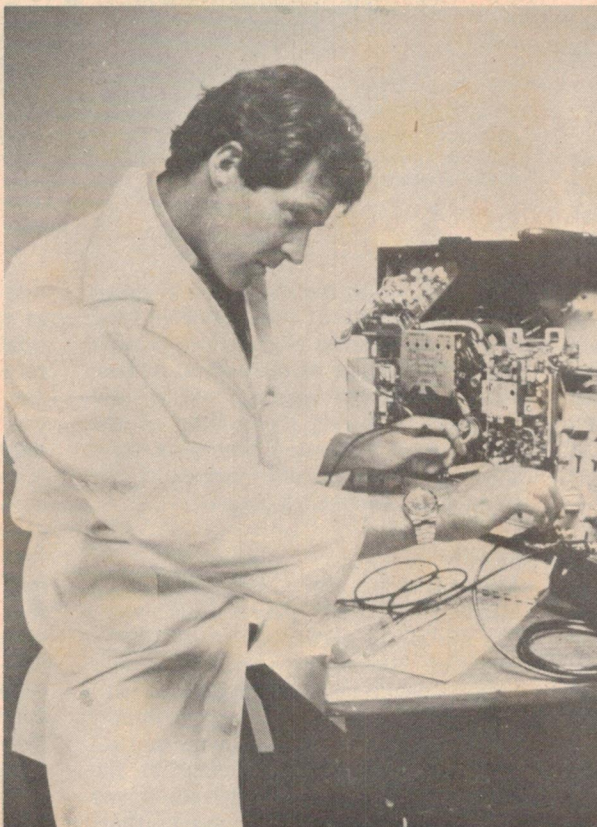

leading to the Certificate of Proficiency issued by the Postal and Telecommunications Department.

8 Data Processing, various courses including Electronic Computer Servicing.

9 TV Servicing courses, in black and white, and PAL colour.

10 TV Principles course for basic television technology. And TV engineering course for complete practical coverage of television engineering.

11 Basic Electrical Engineering is especially for those who want to make a start in the industry or want a broad technical knowledge.

12 Electrical and Electronic Drafting is designed for experienced draftsmen wishing to enter this specialised field.

13 Automobile Electrician gives you the basics of servicing the automobile's electrical system.

14 Industrial Electrician course gives comprehensive training on all aspects of the electrician's work.

15 Electrical Mechanic course prepares you for external examinations.

Please send me, without cost or obligation, information about the ICS courses in Electronics.

Mr/Ms

Address

Postcode Occupation Age Tick here if currently full time student ☐

Write to your nearest ICS city:



International Correspondence Schools

Sydney: 400 Pacific Highway, Crows Nest, N.S.W. 2065. Tel.: (02) 43 2121.

Melbourne: 18-20 Collins Street, Melbourne, Vic. 3000. Tel.: (03) 63 7327.

Perth: 17 Harvest Terrace, West Perth, W.A. 6005. Tel.: (09) 32 1850.

New Zealand: 182 Wakefield Street, Wellington.



226028

Bankcard

ICS1700ET


“Open reel has been closed to new ideas for far too long. The RT-707 proves it.”

One glance says it all. From the people who pioneered the front loading design comes the world's first stackable open reel. The Pioneer RT-707. Suddenly open reel is the same as any other component. Compact and easy to manage. At home on the shelf or racked up leaving bench space clear and uncluttered. Compared with the RT-707, all other open reels are not only bulky and awkward, they're downright old fashioned.

Cosmetics apart, it's also good to know that Pioneer's new ideas are more than skin deep, embracing a whole new open-reel technology. The design is 4-head, 3-motor, 2-speed, with auto-reverse and pitch control. Tape format is quarter-inch, 4-track, 2-channel stereo giving 1½ hours of absolute musical fidelity from 7-inch reels at 19 cm/sec (with auto-reverse). Performance is to professional level with 0.05% WRMS wow/flutter, 58dB signal-to-noise ratio, and a remarkable 20 to 28,000Hz frequency response.

The trend-setting RT-707 exhibits an impressive array of advanced electronic and engineering features. Auto-reverse, for example, not only promises but delivers total fidelity in both tape directions. In addition, you have the added bonus of auto-repeat for endless tape play if you desire. A direct-drive capstan is part of the reason for the improved signal-to-noise ratio at low speed. As in Pioneer turntables, direct drive eliminates the belts and pulleys of other open reels, allowing greater rotational accuracy, less induction hum and heat, with the extra facility of pitch control over $\pm 6\%$ range.

The RT-707 is the complete open reel package. Hair-triggered pause

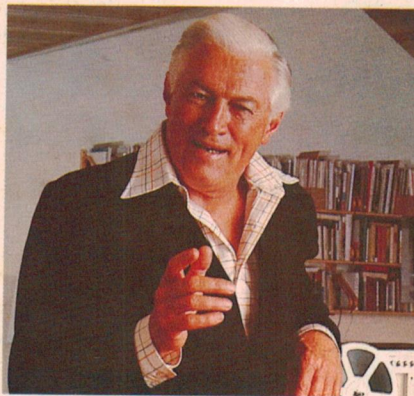

button. Precise tape path tolerances. Hard Permalloy record and playback heads. Four different Bias/EQ values. Independent left/right recording controls.


Exclusive Pioneer ICs in recording amps and playback. Mode-to-Mode transport controls without going through Stop. Extremely long-throw VU meters.

All in a compact and revolutionary configuration that heralds the trend in open-reel for the decade to come.

A short specification

Frequency response	20 to 28,000 Hz.
Wow and flutter	No more than 0.05% WRMS.
Signal to noise ratio	No more than 58dB.
Channel separation	No more than 50dB.
Distortion	more than 1%.
Reference tape and speed	Scotch No. 206 at 19cm/sec.

All Pioneer open-reel decks are covered by warranty for one year. Excellent service facilities are available throughout Australia via a network of Pioneer approved outlets.

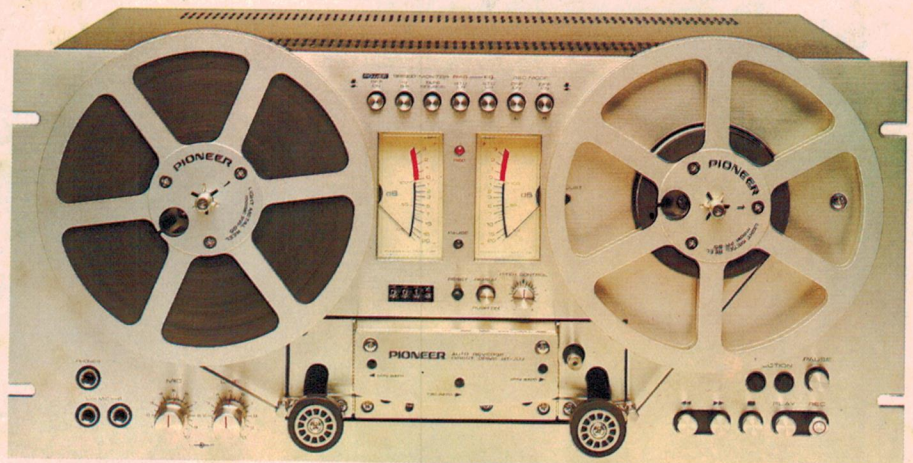

To Pioneer Electronics,
P.O. Box 295, Mordialloc,
VIC. 3195.

Please mail me: (Tick as required)

- ☐ RT-707 Open Reel Tape Deck.
- ☐ Folders on other components of equivalent compatibility.
- ☐ Other (Please indicate)

Name

Address

State P'code

PIONEER
leads the world in sound

Direct-O-Matic

From now, don't settle for anything less!



SC-3110

Direct-O-Matic is a new standard in stereo cassette decks. No deck today can be considered as truly outstanding without the important benefits of Direct-O-Matic. Direct-O-Matic is a Sansui exclusive for easier handling, positive action and improved performance.

An exciting host of other advanced features include electronic Tape



Lead-in, convenient Memory Stop, Dolby* with IC, beautiful black styling and much more!

Remember... from now on, the first thing to ask is: "Does it have Direct-O-Matic?" *Dolby is a trademark of Dolby Lab., Inc.

Sansui

Only hi-fi, everything hi-fi.

SANSUI ELECTRIC CO., LTD. 14-1 Izumi 2-chome, Suginami-ku, Tokyo 168, Japan

VANFI (AUST.) PTY. LTD. 162, Albert Road, South Melbourne, Victoria 3205, Australia Tel: 699 5473

Suite 5, Uniline House, 5 Northcliff Street, Milson Point, N.S.W. 2061, Australia Tel: 929 0293

COUNTDOWN

Noise Reduction Systems

There is a lot which appears on records and tapes that shouldn't be there. How do you go about getting rid of it, or at least reducing it? William King investigates.

OVER THE PAST FEW decades, the standard of reproduction of audio equipment has increased at an astounding rate; so much so that the public is beginning to demand program material of very high technical quality.

One of the major problems in fulfilling this need is being able to recreate the full dynamic range of a live performance, of say, an orchestral concert. The heart of the problem is noise, and this is likely to be worst in the audio link between the studio or concert and the listener at home, whether it be a disc, tape or FM radio link.

For most people a quality tape system with a good signal to noise ratio is far too expensive, and of those people who have FM tuners claiming a signal to noise ratio of 70dB, how many live close enough to a transmitter to have the required 1mV or so available at the front end?

Royal Noise

In the early days of sound broadcasting and recording, when the noise problem was much worse than today, attempts were made to reduce its effect by turning up the gain manually for quite passages of music, thus in effect compressing the dynamic range so that even quiet passages would be above the noise floor. The BBC today still use this technique, in orchestral concerts relayed from the Royal Albert Hall.

The level of quiet passages can be raised by as much as 16dB, thus allowing listeners in poor reception areas who are listening to AM transmissions to be able to receive the entire program without quiet passages being drowned in noise.

The average usable dynamic range of the domestic listening environment allows a usable dynamic range of a mere 65dB. This is about the same as the noise figure introduced between the studio and the listener at home. What use then are noise reduction systems?

Once a master tape has been finished copies will be made, and maybe later even copies made of the copies — but with each successive copying the tape noise will have increased by 6dB (roughly doubled). At home, the now popular 'compact cassette' system, due to its slow tape speed and narrow track width, has a noise figure of -50dB which is noticeable in any listening environment.

Noise reduction systems, then, are a real necessity in the studio and can be justified in the home, and there are at present a number of systems in use, varying in complexity and effectiveness.

The broadest categories into which noise reduction systems fall, are complementary (two pass) units and non-complementary (single pass) types.

Complementary systems, such as the Dolby and dbx systems, consists of two units, a processor and a deprocessor. Before being recorded, or transmitted, the audio signal is passed through the processor and on reproduction through the deprocessor.

Above The Floor


The simplest type of system is the compressor/expander type. In the dbx 122, the processor consists of an audio compressor, which will produce a change in output level of 1dB for a change in input level of 2dB. Thus, an orchestral concert with a dynamic range of 80dB when processed will have a dynamic range of only 40dB, giving the unit a compression ratio of 2:1.

The compressed signal is then recorded on a tape recorder as normal, and now, even the quietest passages (at -40db) will still be well above the noise floor of the tape.

On replay, the recorded signal is played back through the deprocessor, an expander, which restores the original dynamic range of 80dB.

When using a system like this with a tape recorder, the tape recorder must be accurately set up beforehand. If the machine has a frequency response accurate to within ± 3 dB, when the processed signal is replayed and expanded the frequency response will drop to within only ± 6 dB. Any defects in the tape will also be more noticeable — a drop out will sound twice as bad when expanded.

Noise reduction with this sort of system can be as much as 40dB, and because it works over the entire audio frequency range, will provide 'wide-band' noise reduction. Unlike the dolby system, because the compression ratio is independent of

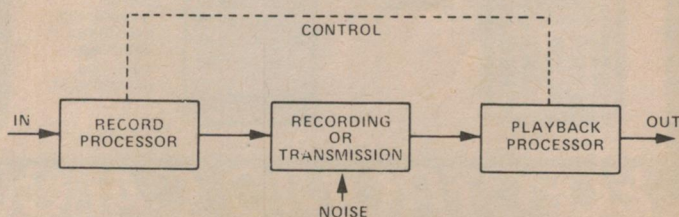

A block diagram of a complementary noise reduction system, showing the need for the overall control between input and output.

If any of these models are advertised in this magazine at a lower price, tell us and we will supply them at a better price.



A few of our great NEW YEAR SPECIALS!

Check our price on the model you want — why pay more? Send SAE for our free complete discount price list of — • Texas • Hewlett Packard • Canon • Casio • Sanyo • Sharp • National Semiconductor

CASIO

AQ1000

Calculator, Alarm Clock, 3-way Stopwatch \$34 (\$38.50)

SCIENTIFIC MODELS

FX120 (44 functions) \$32 (\$36); FX360 (59 functions) \$74 (\$83); FX2500 (LCD, 33 functions) \$33 (\$37); FX3100 (LCD, 43 functions) \$41 (\$46.50)

3 GREAT PROGRAMMABLES

Each with 127 step, 11 memories, conditional jumps and subroutines. FX-201P \$74 (\$83) Basic model; FX-202P \$106 (\$119) Store prog. for 1 year; PRO FX-1 \$180 (\$203) Card programmable.

TEXAS PROGRAMMABLE SYSTEMS

PC100A Alpha-Numeric Printer ~~\$278~~ \$210 (\$234)


For Ti 59 and 58 — Lists, Traces, Prints Words (64 characters), Plots Graphs, etc.

MODULES ~~\$35~~ \$32 ea. plug into Ti59 or 58. Pre-programmed with approx. 5000 steps.

- Leisure Time
- Marine Navigation (\$28 ea.)
- Aviation
- Real Estate and Investment
- Statistics
- Surveying and new!
- Business Decisions
- Securities Analysis

NEW MODULES

- Maths/Utility
- Electrical Engineering



Ti59 ~~\$278~~ \$245 (\$274)

Programmable to 960 steps or 100 memories, also master module with 5000 steps, magnetic cards, 3 manuals, program pad, charger, carrying cases, etc.

Extra Magnetic Cards

Pack of 40 and case \$15

Specialty Pakettes \$10 ea

- Programs for mag. cards —
- Electronic Eng • Civil Engineering • Statistics
- Programming Aids (Decoders and disassemblers) • Securities
- Oil/gas energy • Black body • Printer utility

ALSO

Ti58 ~~\$141~~ \$108 (\$120)

Programmable to 480 steps or 60 memories, otherwise same as Ti59 except for magnetic cards.

GREATEST PACKAGE OFFER EVER!!

A Ti59 and PC100A printer ~~\$686~~ only \$450 (\$503)

A Ti58 and PC100A printer ~~\$419~~ only \$315 (\$351)


(Also any extra modules ordered with package only \$30 ea)

HEWLETT PACKARD




HP's ONLY — POST FREE!
(New low prices)

HP 31E \$60 (\$67)
(Replacement for HP21)
HP 32E \$80 (\$89)
(Replacement for HP45)
HP 33E \$100 (\$112)
(Replacement for HP25)
HP 29C \$162 (\$181)
(Continuous memory)



HP 19C \$210 (\$234) Same as 29C — with printer; HP 38E \$120 (\$134)
Programmable — Business; HP 67 \$450 (\$501) Card programmable; HP 97 \$750 (\$835) Desk model of 67 with printer.

SUPER SCHOOL AND COLLEGE SPECIALS



CANON F41

\$16.90

(\$18.99)

22 functions, all basic maths functions. Ideal for high school.




TEXAS Ti25

\$27

(\$30)

LCD 1000 hours battery life. Slimline in wallet. Alpha display of mode. Cheapest LCD.




CANON F62

\$44

(\$49)

LCD, 1000 hours. The world's smallest full scientific/statistical calculator. 50 functions.




CASIO FX-31

\$19.90

(\$22.40)

29 functions. Great value — with statistical functions and parenthesis.




NATIONAL SEMI-CONDUCTOR NS108

\$36

(\$41)

LCD, 50 functions. 1000 hours battery. In. Billfold style wallet, ideal keyboard layout.



TEXAS Ti55

\$52

(\$58)

60 functions, 10 memories. Programmable, 32 steps. More keyboard functions than any other model.

We can equip your business for dollars less.

NEW! CANON AX-1 and BX-1

(in basic) Desk computers (Floppy Disk, Expandable etc.)



Desk Calculators • Mini Computers
Answering Machines • Dictating Machines • Cash Registers.

Terms or Leasing. Extra 5 percent off for cash (Write or phone for details)

Pack and Post — All LCD models \$1.50 anywhere in Australia. Otherwise \$2.00 for NSW, elsewhere \$3.00 per order. (Extra \$1.50 for registered) **Sales Tax Forms** must be duly signed and stamped. (Forms available).

bankcard welcome here

Note: We will negotiate price on quantity orders.

Copy and complete.
Please debit my Bankcard

No. Expiry Date

Signature

ELECTRONIC CALCULATOR DISCOUNTS

Phone (02) 624-8849 (8am till 3pm) PO Box 106, Baulkham Hills, NSW. 2153.

relative levels, the dbx system requires no complicated setting up or calibration tapes.

Dolby et al

Perhaps the widest known of all noise reduction systems is the Dolby system. There are two versions of this system available, dolby 'A' for use in recording studios, and Dolby 'B'-a simpler version designed for consumer use.

The Dolby A system also works on the principle of compression and expansion, but does not have a fixed compression ratio. The incoming audio signal is filtered into four bands, below 80Hz, 80 to 3kHz, above 3kHz, and above 5kHz.

As can be seen from the diagram, identical filter and compressor networks are used in the processor and deprocessor; — the only difference being the use of an adder in the processor and a subtractor in the deprocessor.

The Dolby A system processor works only on high and medium level signals. If individual frequency components are less than -40dB down the operating level, they will pass through their particular band side chain without undergoing any form of compression. As signals increase in level, so does the amount by which they are compressed, varying from 0 for low level signals to up to 15dB compression for high level signals.

Banding Together

Being a multi-frequency band system, the system minimises some of the problems associated with wideband systems such as the dbx, one particular advantage being that each band can have operating characteristics (such as attack and decay times) optimised, reducing modulation products caused by too slow, or too rapid gain changes.

The fact that the compression and expansion ratios vary with the audio signal level means that in order to function properly, a tape machine using the Dolby system will have to be accurately calibrated with level tapes before use. Due to the different tapes it also is necessary to recalibrate the system when a different type of tape is used. From Dolby A, the typical noise reduction figure which can be expected is 10dB up to 5kHz, rising to 15dB at 15kHz.

The simpler version, Dolby B, is intended for consumer applications, and fitted as standard to many makes of cassette deck divides the audio signal into two audio bands. The system is based on the assumption that high frequency hiss will be far more noticeable than low frequency noise, and so does not process the low frequency content of an audio signal.


The compressor in the processor boosts low level high frequency signals by amounts of up to 10dB depending on the input level, giving on replay and deprocessing a reduction in noise of up to 10dB in the high frequency range. This increases the dynamic range of a cassette system from around 50dB to a max of over 60dB.

To B Or A?

Dolby B uses a non linear dynamic compression ratio and so must be carefully adjusted for the tape recorder and tape with which it is used; very few external user serviceable controls are found on most cassette decks fitted with the dolby B system, for fear that people might incorrectly calibrate the device and produce worse results than if it were not used at all.

One of the drawbacks of complementary systems is that they will only reduce noise introduced between the compressor and the expander. Complementary systems also offer no help with noisy tapes and discs recorded without being first processed, and of course, the various systems available are all incompatible so the engineer with a nice dolby system and a dbx tape is still at square 1!

SOUND

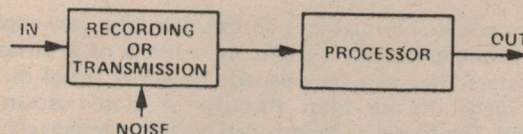

Basic functioning of a non-complementary noise reduction system.


A Fillip To NRS

Single pass non-complementary systems offer some hope for non-encoded material. Philips DNL (dynamic noise limiter) has been around for a few years now, and was specifically designed to reduce noise in unprocessed cassette recordings (but is now also fitted in addition to the dolby system on some Philips reel-to-reel decks).

The DNL consists of a dynamic low-pass filter; noise is most noticeable in quiet passages of music (such as piano music), when most of the higher frequency signal is noise, and it is at this time that the DNL operates.

When the signal's high frequency component is strong, and sufficient to mask the high frequency noise the cut off frequency of the filter increases and allows all the high frequency signal to pass unattenuated. When the level of the high frequency component is low, it is assumed that the noise will be dominant, and the cut off frequency of the filter is reduced, attenuating the noise, and, unfortunately some of the wanted signal.


Burwen's DNF (dynamic noise filter) works on a similar principle but is much more flexible. They system senses the high frequency content of the signal. If there is a lot of high frequency energy present, the filter cut off frequency rises to 30kHz, and all the signal is passed, the high signal level masking the noise. When the signal reduces in level, so does the cut off frequency which falls to 500Hz when no signal at all is present, giving a very substantial noise reduction on blank gaps between pieces of music on tape.

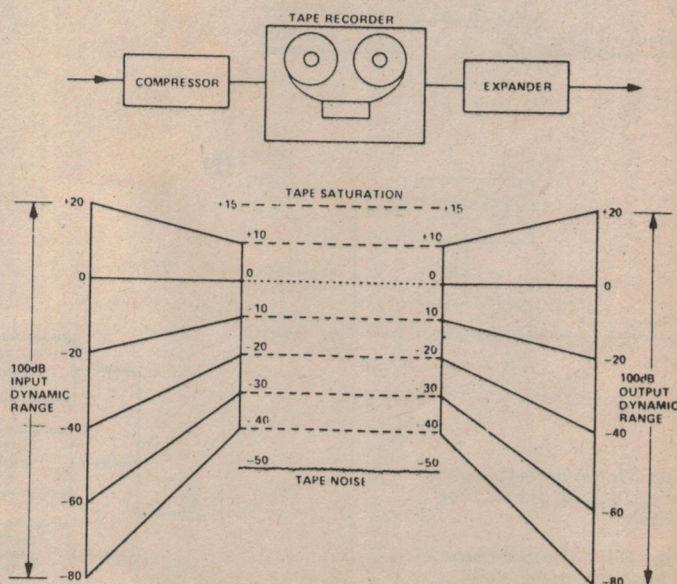


A compander circuit expander-compressor showing how a 2:1 compressor ratio function in practise to give, in theory, 1 100dB S/N ratio from a tape with a 50dB noise 'floor'.

Correlations


Phase Linear's Auto-correlator is an example of a very sophisticated non-complementary system. It consists of a series of bandpass filters that can be opened, to allow signal in the frequency range of the filter through or closed down to remove noise. The filters are controlled by the auto correlation circuitry. Music contains mathematically related tones and is highly coherent (or correlated) in nature, while noise tends to be random and has a low correlation coefficient. What the Auto correlator does is to calculate the correlation coefficient, and use it to determine whether a signal is noise or music. If a particular signal is determined to be musical in nature, the appropriate filters are opened up to allow it, and its harmonics and overtones through.

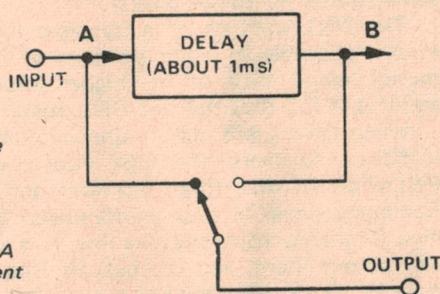

Simplified diagram of the workings of the SAE Impulse Noise Reducer. The 'switch' is the actual unit, which transfers the output connection from A to B when a click is present to eliminate the sound.

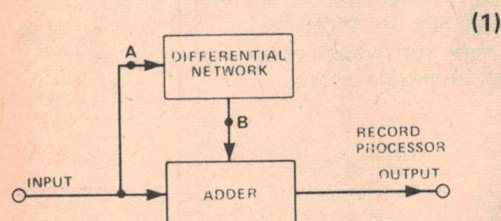

(1)

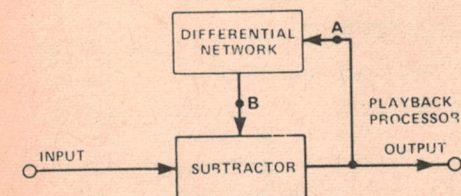


(2)


Top (1): Simplified diagram of a Dolby A deprocessor circuit.

Top (2): The processor circuit to match that shown above.


Right: Diagram of the Dolby A differential networks.

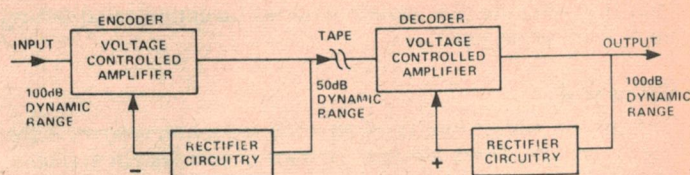

The dbx 122 unit is a refinement of the basic compander design. The addition of the rectification circuitry can be seen from the block diagram.

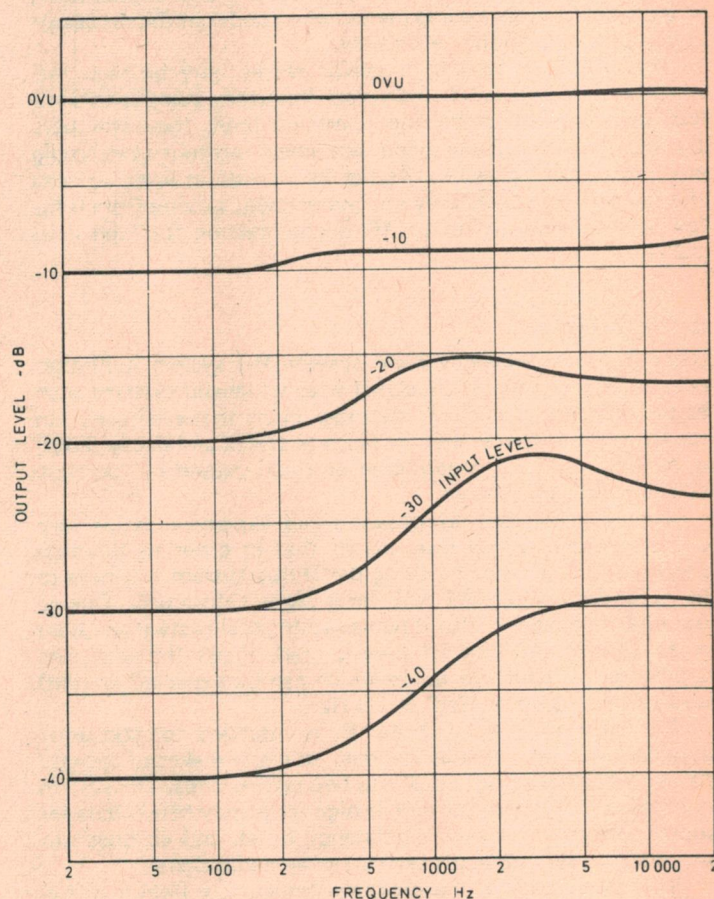

Variable compression ratio of Dolby B system; note how frequencies below 100Hz are unaffected.

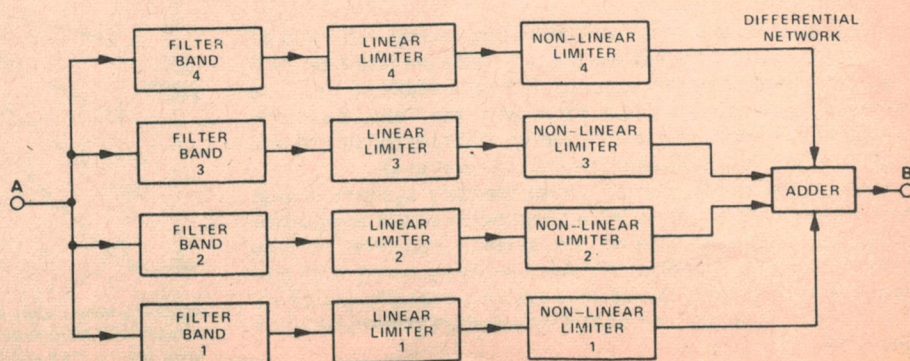

DISCOUNT COMPONENTS

10 RED LEDS	\$1.50
7805	90c
7812	90c
LM317K	\$2.90
TIL209	18c
10 BC547	\$1.20
IN4003	7c
IN4002	7c

100 RED LEDS	\$13.00
10 4016	\$4.50
6 LUG TAG STRIPS	5c
309K	\$1.50
10 GREEN LEDS	\$2.90
10 YELLOW LEDS	\$2.90
10 4011	\$2.00

10 74LS00	\$2.00
10 uA301	\$3.30
4N28	\$1.00
4N29	\$1.10
10 7490	\$3.00
10 74123	\$5.00
10 741	\$2.90
LED CLIPS	2c
10 723	\$4.50

ULTRASONIC TRANSDUCERS

as used in ETI 585R/T ultrasonic switch	
40T	\$5.95
40R	\$5.95
As a pair	\$11.00

ZENERS

400mW E24 Values 3.3v to 33v	0.20
1 Watt Zeners 3.3v to 33v	0.33

TRIACS

SC141D	\$1.30
SC151D	\$2.10

DIACS

ST2	0.35
ST4	0.80

CLOCK MODULES

MA1002B	\$11.50
MA1003	\$21.50

MICRO'S

2708 EPROM	\$15.00
2114	\$14.00
2102 450nS	\$2.10
2650	\$26.00
8080A	\$13.00
9305	\$3.30
9317	\$3.75
9334	\$3.75
9350	\$1.80
9368	\$1.80

PCB'S PRECISION DRILLED FIBREGLASS

ETI 043	\$1.40
ETI 044	\$1.30
ETI 047	\$1.50
ETI 061	\$1.40
ETI 062	\$1.80
ETI 063	\$1.70
ETI 064	\$1.70
ETI 065	\$1.70
ETI 067	\$1.80
ETI 068	\$1.40
ETI 071	\$1.40
ETI 072	\$1.80
ETI 083	\$1.80
ETI 084	\$1.70
ETI 085	\$1.30
ETI 130	\$1.90
ETI 134	\$1.90
ETI 135	\$1.90
ETI 245	\$1.60

ETI 417	\$1.80
ETI 445	\$1.50
ETI 446	\$1.90
ETI 449	\$1.50
ETI 450A	\$1.90
ETI 450B	\$1.90
ETI 480	\$2.20
ETI 480PS	\$2.20
ETI 481M	\$2.00
ETI 481PS	\$2.50
ETI 483	\$2.20
ETI 484	\$3.90
ETI 485	\$2.90
ETI 486	\$2.90
ETI 528	\$2.20
ETI 541	\$2.20
ETI 581	\$2.20
ETI 583	\$2.20
ETI 585R	\$1.60
ETI 585T	\$1.40
ETI 586	\$2.30
ETI 603	\$2.50
ETI 604	\$1.60
ETI 635	\$2.90
ETI 708	\$1.90
ETI 713	\$3.90
ETI 714	\$1.90

RESISTORS

1/2 watt Metal Glaze	1-99	100-999
1 ohm to 1M (E12 values)	3c	2.5c
1.2m — 10m (carbon)	5c	4c
1 watt carbon		
1 ohm to 1M	8c	7c
5 watt		
1 ohm to 100 ohm40	.35

TANTALUMS Resin Dipped

.1, .15, .22, .33, .47, .68uF (all 35V)	1-9	10-99
1uF 35V25	.20
2.2uF 25V25	.20
2.2uF 35V23	.20
3.3uF 25V25	.20
4.7uF 35V25	.22
6.8uF 35V30	.25
10uF 16V25	.23
10uF 35V30	.28
15uF 16V30	.25
15uF 35V50	.45
22uF 16V38	.35
47uF 16V65	.60
68uF 16V	1.20	1.10
100uF 6.3V70	.65

MINIATURE TRIMPOTS

0.1 watt, .1" spacing	1-9	10 up
100, 250, 500, 1K, 2K, 5K, 10K,20	.17
25K, 50K, 100K, 250K, 500K, 1M20	.17

I C SOCKETS

	1-9	10 up
8 Pin DIL25	.23
14 Pin DIL33	.30
16 Pin DIL35	.30
18 Pin DIL55	.50
24 Pin DIL70	.65
40 Pin DIL	1.40	1.20
28 Pin DIL	1.20	1.10

POTENTIOMETERS

.25 watt rotary carbon single gang, Log or Lin.	
1K, 5K, 10K, 25K, 50K50
100K, 250K, 500K, 1M, 3M (Lin)50

CERAMICS

10pF to 680pF05c
820pF to .0015uF E12 Values06c
Include 30c postage for free catalogue.	

ELECTROLYTICS

		1-9	10 up
4.7 uF	25v	PCB	0.08
10 uF	25v	PCB	0.09
10 uF	50v	PCB	0.10
22 uF	16v	PCB	0.08
22 uF	35v	PCB	0.10
33 uF	16v	PCB	0.09
33 uF	50v	PCB	0.11
47 uF	16v	PCB	0.10
47 uF	35v	PCB	0.12
100 uF	10v	PCB	0.11
100 uF	16v	PCB	0.12
220 uF	25v	PCB	0.15
470 uF	16v	PCB	0.17
1000 uF	25v	PCB	0.38
2500 uF	50v	Axial	1.95
2200 uF	25v	PCB	0.55
6800 uF	50v	LUG	4.75
5600 uF	40v	PCB	2.90
4700 uF	35v	Axial	2.10

KITS

ETI 480 100W Module Kit	
Includes Heat Sink Bracket	\$19.75
ETI 480 50W Module Kit	
Includes Heat Sink Bracket	\$16.00
12 volt Electronic Siren Kits	
1. "Whip"	\$8.00
2. "Wail"	\$8.00
3. "Flying Saucer"	\$8.00
Horn Speaker to suit	\$8.50

SILICON VALLEY

Products in stock. Also available mail order as per the Silicon Valley catalogue and price list.

Also in stock: Multimeters, relays, veroboard, solder, solderwick, soldering irons, transformers. All components brand new by top companies. Prices current till end of March.

ROD IRVING ELECTRONICS

Shop 499, High Street, Northcote, Vic 3070. Ph (03) 489 8131. Open Mon-Thurs 9.00-5.30, Sat 8.30am-12.30pm. Mail Orders: PO Box 135, Northcote Vic. 3070, Minimum 75c post and pack. Send 30c stamp for free condensed catalogue.

If the correlation is low, the signal is treated as noise and the appropriate filters are activated preventing noise from passing through.

These three non-complementary systems, because of the way they operate, will inevitably have an effect on the wanted audio signal, but if carefully set up can give a substantial reduction in noise with only a minor effect on the program content, and it must not be forgotten that while two-pass systems only reduce noise introduced between the processor and deprocessor, a non complementary one pass system can effectively reduce noise generated anywhere in the audio chain from the studio to device itself.

Snip The Crackle And Pop!

One recently developed type of noise reduction system, the SAE model 500 Impulse Noise Reduction System, has been designed to remove unwanted clicks and pops caused by scratches in discs.

The SAE device recognises clicks and pops by their fast rise and fall times. If a signal has a fast rise and fall time it is thus assumed to be an unwanted 'click', the click is removed and to prevent a period of silence disturbing the continuity, a small section of the preceding music is inserted in its place. This feat is accomplished using an analogue delay unit providing a delay of a few milliseconds, as the 'click' transient is

about to enter the delay, the output of the device switches from the input of the delay to the output. Then, just before the click is about to leave the delay, the output of the unit again switches back to the input of the delay, thus removing the click. The typical click only has a duration of about a millisecond, and so the switching to the delay goes unnoticed, but the click vanishes.

Studios Future

What the future holds in store for "noise" is anyone's guess; within a decade we may see digital tape-recorders as the standard in studios — using digital recording techniques will, if the sampling rate is high enough, eliminate noise induced in tape systems (or in broadcasts if we ever see pulse code modulation for broadcast stations) altogether, and will allow tapes to be copied any number of times without any extra noise being introduced. Already, it is possible to buy add on units for video recorders to enable audio signals to be digitally recorded onto tape!

For the moment, however, for the engineers in recording studios using multi-track machines where track width is small, and for the hi-fi enthusiast at home with his cassette system, noise reductions systems are a necessity, and will remain so for some time.

ill-informed criticism?

IN RECENT TIMES, ETI in common with most other electronics and audio magazines, has come under fire from a few British equipment manufacturers and their local agents for what they describe as 'ill-informed criticism'.

To some extent this can be interpreted as not going along with the cozy little 'you scratch my back and I'll scratch yours' arrangements that did — and with some magazines still does — exist. Ask when you last saw a poor review in ZXY Hi-Fi and you'll know which ones they are!

Nevertheless some of the industry's criticisms are valid. Certainly no magazine publishes reviews that a scientist would accept as scientific. To start with there's few agreed industry measurements standards — and even if there were agreement it's unlikely that publications could afford to take all the specified measurements to the degree of accuracy that would be required.

We do the very best we can. We use reviewers with years of experience in this field backed up by testing facilities which are often in advance of those used by most of the manufacturers themselves. But none of these reviews is scientific in the real meaning of that word — and nor are those conducted by most manufacturers.

Comparative Demonstration

In light of the above it was with a sense of wonder that we encountered a demonstration put on by Linn at Britain's recent Cunard hi-fi show.

Linn have long proselytised their belief that the turntable itself greatly influences the sound from a hi-fi system. Various demonstrations and reviews have 'shown' that a Linn turntable sounds better/different from others — although without

exception the comparative methods used had more independent variables than an old-fashioned steam organ.

Rival manufacturers on the other hand suggest or openly state that if there *is* a difference it's caused by the Linn's platter resonating like a gong in a multiplicity of modes. 'The Linn's not so much a turntable — it's a musical instrument' says one eminent Japanese turntable designer, 'people may well like the sound but what they're hearing isn't on the record'.

At the Cunard Show, Linn apparently set out to prove that their deck really *was* better — but in attempting to do so they threw the faintest resemblance to scientific method right out of the window.

They set up two quite separate systems. The first had a relatively cheap (but good) Rega turntable and top everything else — the second had a Linn turntable but more modest everything else (compared with the first system).

System 1 had the Rega deck, Grace arm and Supex cartridge, Naim pre-amp and three (!) Naim power amps tri-amping a pair of Linn's Isobariks.

System 2 had the Linn deck, Rega arm, budget-priced ADC cartridge, Naim pre-amp and power amp and a pair of Mordaunt-Short's smaller speakers.

The demonstrator played very brief musical passages on one system and then the other interspersing these with assorted jokes and insults.

To our relatively unbiased ears it seems as if the cheaper system (using the Linn deck) *was* superior to the other. This was apparently the conclusion we were supposed to reach.

So terrific! A pair of small Mordaunt-Short's are better than Linn's own Isobariks? Or a Grace arm and Supex cartridge

SOUND

cannot improve a Rega Turntable? Or that using multiple Naim amps is a waste of time, money, power and space?
Or what?

Puzzling

The records were different. The speakers were in different positions. The equipment combinations were so varied as to be an impractical joke.

SOUND BRIEFS

Philips Belt-Drive

Philips have brought out two new **belt-drive turntables**, models AF777 and AF877, which incorporate a **speed sensor** mounted under the platter. Circuitry in the turntable uses speed information to calculate the acceleration required of the belt drive.

Pioneer Buys Phase Linear

New Jersey based US Pioneer Electronics Corporation, a subsidiary of Pioneer Electronics Corporation Tokyo, has bought Phase Linear Corporation. No change in marketing is envisaged.

Consumer Electronics Show

The date of the **4th Australian Consumer Electronics Show** has been set for **July 18th to 22nd 1979**. It will take place at the **Sydney Showgrounds**.

Power Amp Tone Control

Sansui have taken a rather unconventional step in the design of their TA500/300 range of tuner/300 range of tuner/amps. They have **incorporated the tone control circuitry into the power amp section** — presumably to reduce overall noise figures. Interestingly, their press release gives no noise figure for the amplifier stage.

Akai To Move Into Eden Park

Akai Audio/Video Australia Pty Ltd are to set up industrial premises in Sydney's **Eden Park Industrial Estate**, on the North Shore of the city.

Peak Programme Meter

Studio Electronics Pty Ltd have introduced two models of **LED peak programme meter**. The scales on the meters are non-linear (even in terms of dBs!) and comprise either 12 (model 112) or 30 (model 130) LEDs. The larger model also has remote-switchable characteristics, allowing either peak programme or VU operation. PO Box 1055, Burwood, NSW 2134, phone: 747.5686.

STEWART ELECTRONICS

33 SUNHILL ROAD, MT. WAVERLEY, VIC. 3149. PHONE: 277-0600.

9am-6pm Monday to Friday
9am-12 noon Saturday

* NOTE
NEW ADDRESS

COMPUTER GRADE CAPACITORS

2900 uF 40v \$5.20
6800 uF 16v \$5.00
10,000 uF 16v \$7.00
10,000 uF 25v \$7.85
10,000 uF 40v \$10.00
15,000 uF 25v \$9.00
22,000 uF 25v \$10.50
22,000 uF 40v \$18.00
27,000 uF 35v \$18.90
68,000 uF 16v \$17.00



WIRE WRAP CENTRE

Hobby-Wrap Tool BW-630
• Battery operated (Size C)
• Weighs only 11 ounces
• Wraps 30 AWG wire onto standard DIP sockets (.025 inch) Complete with built-in bit and sleeve.
\$42.95
tax exempt
(Batteries not included)



WIRE WRAP KIT WK-2-W

Wrap-Strip-Unwrap
• Tool for 30 AWG wire
• Roll of 50' white or blue 30 AWG wire
• 50 pcs each 1", 2", 3", 4" lengths, pre-stripped wire



\$16.69

WIRE WRAP WIRE 30 AWG

50ft \$2.60, 1000ft \$17.20. Specify colour.
White, yellow, red, green, blue, black.

EDGE CONNECTORS

No.	PINS	TYPE	PRICE
20/40	Dual		\$2.38
30/60	Dual		\$3.84
25/50	Dual D2		\$3.13
43/86	Dual (D2 Exorcisor)		\$5.69
50/100	Dual (\$100)		\$4.90

This is just a sample of our range.
Write for a price list.



M6800 D2 COMPATIBLE BOARDS

16K RAM Kit without RAM's	\$97.00
Prototype Board	\$24.50
Extender Card	\$16.50
EA 78u9 VDU Board	\$15.00
R03 2513 Character generator, single 5v supply for 78u9	\$12.50

\$100 BOARDS

Genuine American made boards, plated through holes, solder masked, silk screen layout. Complete documentation with each board.
8K RAM (2102).....\$39.50
16K RAM (2114).....\$39.50
16K EPROM (2708/2716).....\$39.50
Z-80 CPU.....\$43.00
VDU 32 or 64 characters, 16 lines, 128 x 48 graphics.....\$39.50
ETI 641 Printer, board only.....\$15.00
Vector Proto-board.....\$29.00
Vector 11 slot backplane with tantalum bypasses.....\$39.50

POWER TRANSFORMERS

JDT-002 8v 20A, 15v 3A, 15v 1.5A.....\$28.60
JDT-001 8v 10A, 2 x 15v 1.5A.....\$18.50
JDT-003 8v 5A, 2 x 15v 1A.....\$14.00
Specially designed for microcomputers, all have electrostatic shield.

All prices are plus 15 percent sales tax unless specifically noted. Please allow sufficient postage. Heavy items will be sent Comet, freight forward.

**The only DMM
that includes all the
operating accessories
in the low basic price**



DIGITAL MULTIMETER ARLEC DMM 10

Features

- Large $\frac{3}{8}$ " (9.5mm) LED Numerals
- Automatic Decimal Point
- 3 Digit 0-999 Display
- Instantaneous Readout
- Zero Locked
- 7 MEGOHM Input Impedance
- 12 Measuring Ranges
- Over-range Indication
- Overload Protected
- 1% Accuracy

Supplied complete with:

1. Rechargeable Nicad Batteries
2. Combined AC Adaptor & Battery Charger
3. Connector for charging from auto battery
4. Test Prods
5. Operating instructions
6. 12 month guarantee

A Heavy Duty Carrying Case is available as an optional extra.

SEE THEM AT YOUR LOCAL ELECTRONICS STORE
OR THE A+R ELECTRONICS BRANCH IN YOUR STATE.

ARLEC
QUALITY PRODUCTS

DESIGNED & MANUFACTURED IN AUSTRALIA BY
A+R ELECTRONICS
A MEMBER OF THE A & R-SOANAR ELECTRONICS GROUP
30 Lexton Road, Box Hill, Victoria


BUILD MUSIC AND SOUND

Expand your talent with the SH1 synthesizer; let it take you into areas previously reserved for musicians. Roland, the world's largest maker of electronic musical equipment, now provides you with a comprehensive operator's manual which will show you how to enjoy and understand the never-ending creative possibilities.

Simply hook up the SH1 with your hi-fi system and play your favourite electronic, pop or orchestral sounds — or sound effects like surf, rain, wind, etc.

\$850 gets you into the
exciting world
of electronics and
sound

*recommended retail

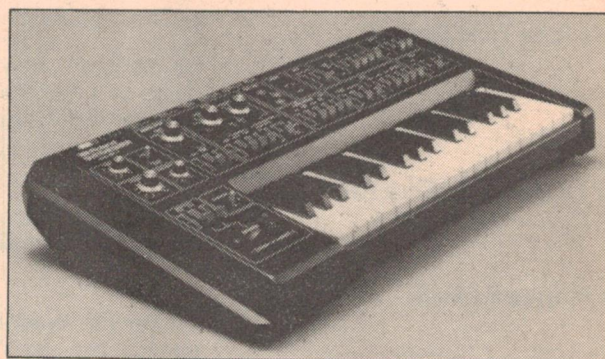

SH-1

- KEYBOARD (32 keys, 2-1/2 octaves)
- VCO (voltage controlled oscillator)
- Modulator
- Autobend Depth
- Autobend Time (8-360 msec)
- VCO Range (32, 16, 8, 4, 2)
- Waveform (A, n, ~)
- Pulswidth Modulation (Min-50%)
- PWM Mode Switch (Env-1/Manual/LFO)
- Sub-oscillator
- 1 oct Down
- 2 oct Down
- 12 oct Down
- AUDIO MIXER
- VCO
- Sub-oscillator
- Noise Generator
- Ext Sig
- Overload Indicator
- NOISE GENERATOR
- White/Pink Selector
- HIGH PASS FILTER
- Cutoff Frequency Control (25Hz-5KHz)
- VCF (Voltage Controlled Filter)
- Cutoff Frequency Control (5 Hz-20KHz)
- Resonance (Min-Self Oscillation)
- ENV-1 Control Depth
- Modulator
- KYBD Control
- Envelope Follower Control
- VCA (Voltage Controlled Amplifier)
- Hold Control
- Envelope Switch (ENV-1/ENV-2)
- ENVELOPE GENERATOR 1
- Attack Time Control (1.5 msec-2.5 sec)
- Decay Time Control (1.5 msec-8 sec)
- Sustain Level (0-100%)
- Release Time (1.5 msec-8 sec)
- Gate Trigger Selector Switch (Gate + Trg/Gate/LFO)
- ENVELOPE GENERATOR 2
- Attack Time Control (1.5 msec-3 sec)
- Release Time (1.5 msec-8 sec)
- Gate Selector Switch (Gate/LFO)
- Modulator
- Mode Switch (Random / n / ~)
- Rate Control (0.2 Hz-25Hz)
- Delay Time Control (0-3 sec)
- Rate Indicator
- Controller
- KYBD/Ext CV GATE Selector Switch
- Total Tuning (+700 cents or over)
- Portamento Time Control (0-2.5 sec)
- Total Volume
- Transpose Switch (L/M/H)
- Bender Level
- Bender Sensitivity (VCO, VCF)
- CONNECTION JACKS
- Output Jack
- Output Level Switch (L/M/H)
- Phones Jack (8 ohm stereo)
- Phones Output Level Switch (L/M/H)
- External Input Jack
- External Signal Input Level Switch (L/M/H)
- External Control Voltage Input Jack (1 V/1 Oct)
- External Gate Voltage Input Jack (ON with +7.5 V or over)
- Keyboard Control Voltage Output Jack (1 V/1 Oct)
- Keyboard Gate Output Jack (OFF-0 V, ON-14 V)
- POWER CONSUMPTION: 10W
- DIMENSIONS: 610(W) x 370(D) x 135(H)mm
- WEIGHT: 6.4 kg, 14 lbs
- ACCESSORY: 2.5m Connection Cord

Super Fat Sound from a New 24dB/oct Filter
*Specifications are subject to change without notice.

Write or call for more information.



Roland Corporation (Australia) Pty. Ltd.
13 Chard Road, Brookvale, N.S.W. 2100.
Telephone (02) 938 3911.



EMONA
enterprises

ROOM 208/661 GEORGE ST, SYDNEY.
PH: 212-4815, 211-3038


P.O. Box 188, COOGEE. NSW. 2034.

**FOR PROMPT MAIL
ORDER SERVICE!**

CALCULATORS

from TEXAS INSTRUMENTS

**PC100A
with
TI-58/59**




	Excl. S. Tax	Incl. S. Tax
T.I.-25	\$32.00	\$35.00
T.I.-30	19.00	20.50
T.I.-30 Student Pack	23.00	25.00
S.R.-40	28.00	32.00
T.I.-50	36.00	40.00
T.I.-55	53.00	59.00
T.I.-57	74.00	85.10
T.I.-58	109.00	120.50
T.I.-59	247.00	275.00
T.I.-5050M	81.00	90.00
Little Professor	16.00	17.90
Data Man	23.00	25.00
T.I. First watch	20.00	22.00
T.I. Speak and Spell	45.00	50.00
T.I. Spelling Bee	28.00	31.00
T.I.-Business Analyst	33.00	37.95
T.I.-Business Analyst 11	39.50	43.00
T.I.-MBA	75.00	87.40
T. I. Programmer	53.00	59.00
T.I.-MM Money Manager	21.00	23.50
PC-100A Printer	213.00	236.00
T.I. 5025 H/held printer	77.00	85.00
Library Modules for T.I.-58/59	31.00	35.00
Blank Mag. Cards for T.I.-59	14.00	16.10
Programming Forms — Pads	2.20	2.80
TP-30250 (3 rolls of paper, PC100A)	10.00	11.50

NEW

**SINCLAIR
Enterprise
— Programmable!**

- Real computing power.
 - A comprehensive program library: General, Finance, Statistics, Mathematics, Physics, Engineering and Electronics.
- (For more details see Sept. '78 ETI)



Excl. S/Tax **\$69.50** Inc. S/Tax **\$79.95**

THE ULTRASLIM

NS 108 by National Semiconductor. For details see Sept. '78 ETI.

Excl. S/Tax **\$44** Inc. S/Tax **\$50**
\$40 **\$46**



BMC-1212PD, 12 Digit Display Printer Excl. S/Tax \$108.70. Incl. S/Tax \$125.00

TRADE ENQUIRIES WELCOME

DIGITAL MULTIMETERS

**Sinclair Digital Multimeters
DM235**



Only \$130 (plus 15 percent sales tax)
**Exclusive Sinclair
12 months guarantee!**

FEATURES:

• 3½ digit resolution • Large, bright, wide angle LED display reading to ± 9999 • Automatic polarity selection • Industry standard 10M ohms input impedance • 0.5 percent of reading basic accuracy • Full multimeter facilities including AC current • Resistance measurement up to 20M ohms. • Direct reading of semi-conductor forward voltages at 5 different currents • Simple, unambiguous controls with readings always in volts, mA or k ohms. • Selection of all functions from a single input terminal pair • Automatic overrange indication • Automatic decimal point placement • Operation from disposable or rechargeable cells, or from AC adaptor/charger • Facility for battery condition test.

Six functions in 26 ranges

DC Volts — 1mV to 1000V; AC Volts — 1mV to 750V; DC Current — 1 uA to 1A; AC Current — 1 uA to 1A; Resistance — 1 ohm to 20M ohms; Diode test — 0.1 uA to 1mA; 10M ohms input impedance.

Reading rate: 2½ per second

Temperature coefficient: less than 0.05 degrees C of applicable accuracy specification.

Dimensions: 10" x 5.8" x 1.6" (225 x 148 x 40mm)

Weight: Less than 1½ lbs (640 gms)

Sockets: Standard 4mm for resilient plugs, ¾" (19mm) spacing

Power Requirements: Four 'C' or R14 size disposable cells, or approved AC adaptor or Sinclair rechargeable cell pack

Supplied Complete with test leads and prods, and operator's instruction manual

Options A/C adaptor/charger units for 240V; Rechargeable battery pack; Eveready carrying case with neck strap and lead stowage compartment; 30kV High voltage probe.



PDM35

Only \$65 \$55
(plus 15 percent S/T.)

**Now everyone can
afford to own a
digital multimeter**

A digital multimeter used to mean an expensive, bulky piece of equipment. The Sinclair PDM35 changes that. It's got all the functions and features you want in a digital multimeter, yet they're neatly packaged in a rugged but light pocket-sized case, ready to go anywhere. **Features:** 3½ digit resolution reading to plus/minus 9999. Automatic polarity selection. 10M ohm input impedance. Full multimeter facilities. Resolution of 1mV and 0.1nA. Semiconductor junction test facility. 1 percent of reading accuracy. Genuine pocket format. **Ranges:** DC volts; 1mV to 1000V. AC volts; 1V to 500V. DC current; 1nA to 200mA. Resistance; 1 ohm to 20M ohms. **Contents:** PDM35; test leads with probes; owner's operating manual — protective carrying pouch. **Power Requirements:** 9 volt transistor radio battery or 9 volt approved AC adaptor.

**Exclusive Sinclair
12 month guarantee!**


NEW! NEW! NEW!

INTRODUCING THE

**SINCLAIR
DM350**

Introductory price only

\$190 Plus 15 percent S/T.



Exclusive
Sinclair
12 months
guarantee!

FEATURES:

The DM350 is a laboratory quality digital multimeter. The large LED display has an exceptionally wide viewing angle and a variable brightness control. Measures AC volts, DC volts, AC current, DC current, resistance and diode volts in a total of 34 ranges. Special features include ultra wide current handling from 1uA up to 10 amps, and very high input impedance on the 2000mV range (in excess of 1000 M ohm). The DM350 will operate from low cost disposable cells or from an optional AC adaptor. This adaptor also serves as a charger when the rechargeable battery pack is fitted. **Write or phone for further details.**

**CORONA — AD7802
AUTOMATIC TELEPHONE DIALLER**

Includes 40 memories.

See ETI Jan '79.

only **\$325** (incl. sales tax)

NEW RELEASE:

BIE Dictating Machines & Transcribers!

WATCHES — DIGITAL AND
QUARTZ ANALOGUE

- Gents, Ladies, Solar Chronographs, etc.
- QUARTZ ANALOGUE — NEUCHÂTEL, Swiss made.
- Check availability of all models before ordering.

NOTE: For all goods; P&P, Int. \$3. NSW \$2 (up to \$50 value) Int. \$4, NSW \$3 (up to \$100 value). Goods valued over \$100 delivered by courier — freight paid by receiver.

To: EMONA ENTERPRISES
PO Box 188, Coogee, NSW. 2034.



Please send me.....

I am enclosing cheque ☐ money order ☐

or debit my Bankcard, Number.....

Signature

Name

Address

P/code.....

APPLIED TECHNOLOGY ON THE MOVE * * * *

We have now moved into new, larger premises to enable us to carry a greatly expanded range of components for the electronic hobbyist.

Send \$1.00 for your copy of the 1979 Catalogue.

IC'S

LOW POWER SCHOTTKY
TTL
CMOS
LINEAR
VOLTAGE REGULATORS
OPTO
INTERFACE

MAGAZINES

KILOBAUD, BYTE,
INTERFACE AGE
DATA BOOKS TO COVER
EVERYTHING

PHOTOCOPIES-25¢

TOGGLES, SWITCHES,
CONNECTORS, POTS,
TRIMPOTS, RELAYS.

SOCKETS
(SOLDER & WIRE WRAP).
EDGE CONNECTORS
BNC CONNECTORS.

MICROPROCESSORS

2650, SC/MP, 6800 Z80,
EPROMS
RAMS
ROMS
UARTS

CAPACITORS

CERAMIC
TANTALUM
POLYESTER
ELECTROLYTIC
(AXIAL & PC MOUNT)

RESISTORS

DIODES
TRANSISTORS
SCR'S
TRIACS
SWITCHES
RELAYS

PCB

MAGAZINE PROJECT BOARDS
RISTON COATED BOARD
BISHOPS GRAPHICS
SCOTCHCAL FILM

HARDWARE

NUTS/BOLTS
HEATSINKS
INSTRUMENT CASES

MICROPROCESSOR CRYSTALS

LARGE STOCK RANGE
FROM 1.000 MHZ
TO 100 MHZ,

OPENING SPECIALS

4001, ED41	15¢
4011	15¢
74LS00	15¢
7400	15¢
BC 547, 548, 549	15¢
BC 557, 558, 559	15¢
400 mW ZENERS	15¢
IN4004	6¢
RED LEDS	15¢

(OFFER EXPIRES FEBRUARY 28
OR
WHEN SPECIAL STOCKS DEPLETED)

NOTE: OUR NEW 1979 CATALOGUE AVAILABLE FEBRUARY INCLUDES EXTENSIVE MICROPROCESSOR SECTION AND DATA SHEETS—SEND \$1.00.

MICROPROCESSOR 2650

Buying a Microprocessor is easy these days . . .

But only where you can get back-up service and support.

Applied Technology pioneered this approach and has helped many into the exciting world of computers with the 2650 systems.

Ask about our program courses, games and program tapes, pilot, basic and our free seminars . . .



POST & PACKING \$2.00
OVERNIGHT AIR DELIVER \$6.50
(Australia wide)

(SHOWROOM OPEN 9.00 TILL 5.00 MON. TO SAT.)

POSTAL ADDRESS

P.O. Box 355, Hornsby 2077

HEAD OFFICE/SHOWROOM—1A PATTISON AVE., WAITARA N.S.W. 2077

PHONE: (02) 487 2711



Gain Control

Part 2

To conclude his survey of electronic gain control methods. Tim Orr presents us with more circuits which vary from a light bulb compressor to a markspace modulated universal filter unit, and a noise gate/expander.



Basic Limiter Circuit

Most professional limiter circuits use a FET as the variable gain element. Relatively low distortion with a reasonable signal to noise ratio can be obtained. A basic limiter circuit is shown this being no different to previous circuits except for the variable gain element.

When a relatively small voltage (20 mV) is applied to the drain source of a FET, it acts like a fairly linear resistor. As the gate source voltage is varied, this resistor (R_{DS}) also varies.

In fact the channel resistance R_{DS} is inversely proportional to gate source voltage V_{GS} . When V_{GS} is 0V, then R_{DS} is at its generally minimum resistance (R_{ON}) which can be as low as $5R$, but it is generally more like $100R$. When V_{GS} exceeds the pinch off voltage (V_p or V_{GS} off) the channel resistance goes up to several hundred megohms. So a junction FET can be used as a voltage controlled resistor, except that R_{ON} and V_{GS} (OFF) tend to vary widely from device to device. However with a bit of perseverance suitable devices can be selected and made to work.

One circuit trick that greatly reduces distortion is shown here. Half of the audio signal at the drain of the FET is presented to the gate. This is superimposed on top of the control voltage and produces a distortion cancelling effect. Distortion levels below 0.1% can be achieved using this technique.

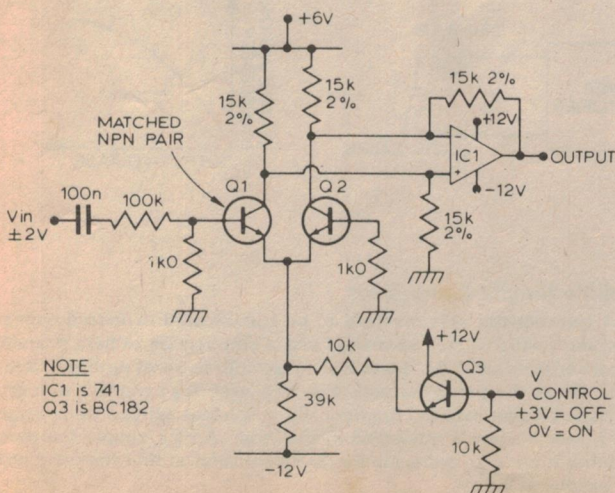
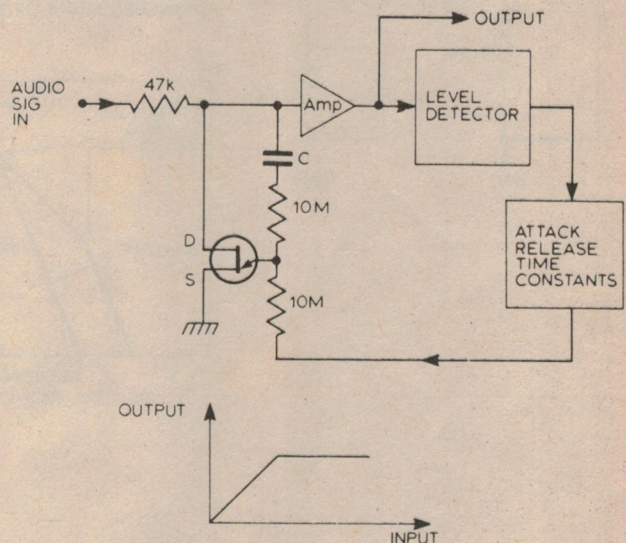


Transistor VCA

A circuit similar in operation to a CA3080 can be constructed with a matched pair of transistors and an op amp. Transistors Q1, 2 form a differential transistor pair which is used to steer whatever current is available between the two collectors, just as in the CA3080. The difference between the collector currents is equal to the product of the input voltage times the current I_{EE} times a constant. This difference is extracted by the differential amplifier IC1. The current I_{EE} is controlled by Q3. As the control voltage goes positive, Q3 robs most of the current flowing down the 39k resistor, and hence I_{EE} and the output of IC1 decrease.

Switched Frequency Low Pass Filter

In this example the effective resistance is switched by using 4016 gates. The filter is a lowpass Butterworth and by turning gates A or B ON or OFF the cut off frequency can be altered. This allows the filter control to be physically remote or even to be computer controlled. Mark Space modulation of A and B would enable continuous control over the cut off frequency.

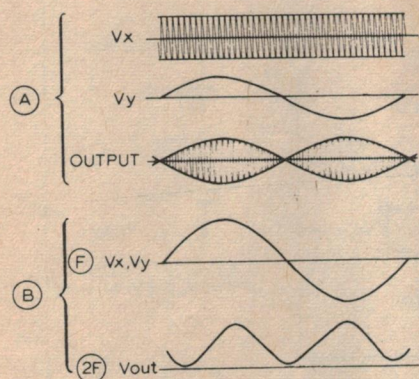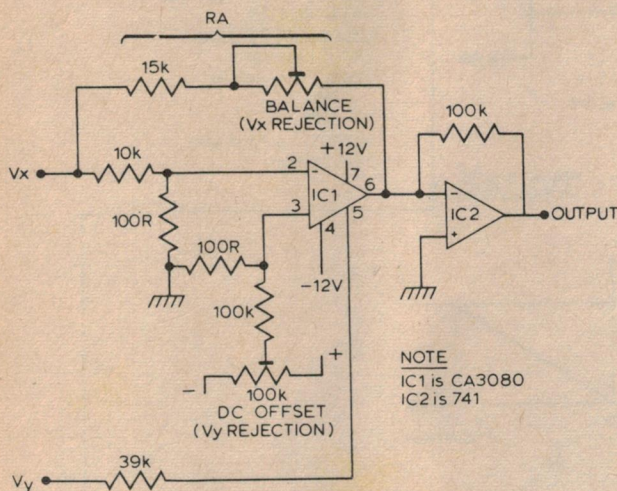


Four Quadrant Multiplication


By using a few circuit tricks, the CA3080 can be made to perform 4 quadrant multiplication. In fact the CA3080 performs 2 quadrant multiplication and the trick is to move the axis on the multiplying graph. If we ignore the RA resistor chain then we have a 2 quadrant multiplier circuit similar to that shown previously. Imagine that V_x is a 1kHz sine wave. 1 Vptp and V_y is a 0V. The output of IC1 is a sine wave of fixed amplitude. Now if we connect RA, and adjust the balance control, it will be possible to cancel out the output, because the signal coming from IC1 is out of phase with that from the RA resistor chain. So with V_y set at 0 V there is no output for IC2. If V_y goes +ve, the output of IC1 will become greater than the current via the RA chain and the output of IC2 will grow.

If V_y goes -ve the current through the RA chain will exceed that from IC1 and the output of IC2 will grow, the phase being opposite to that when V_y was a sine wave from an oscillator, then this circuit could be used to generate ring modulation effects.


When V_x is set at 0V there may be some V_y breakthrough and this can be minimised by adjusting the V_y rejection preset.

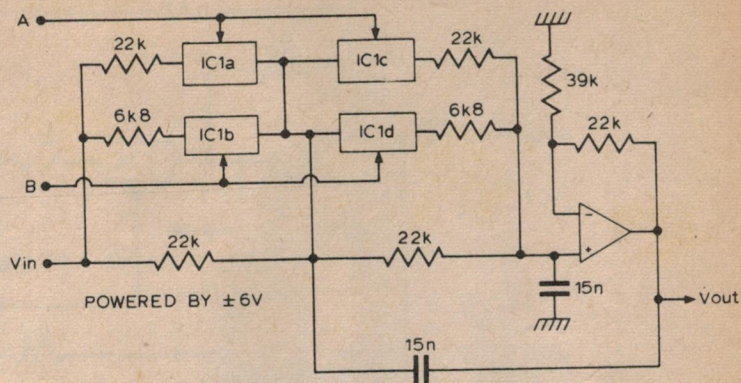

	①	②	③	④
A	OFF	ON	OFF	ON
B	OFF	OFF	ON	ON
Fc	500Hz	1kHz	2kHz	2.5kHz

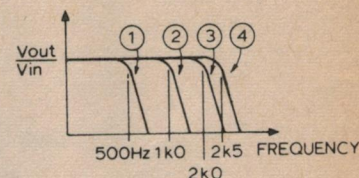

Microwave Survey Meter Model HI 1501



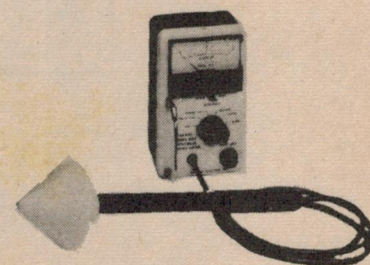


The HI 1501 is a rugged, compact, portable instrument and is virtually immune to failure caused by excessive fields or physical abuse. It consists of a lightweight instrument package connected to a unique detection probe by a shielded cable.

For additional information
call or write:

Reg Geary & Associates

276 Highett Rd, Highett, Vic.
Phone (03) 553-1935

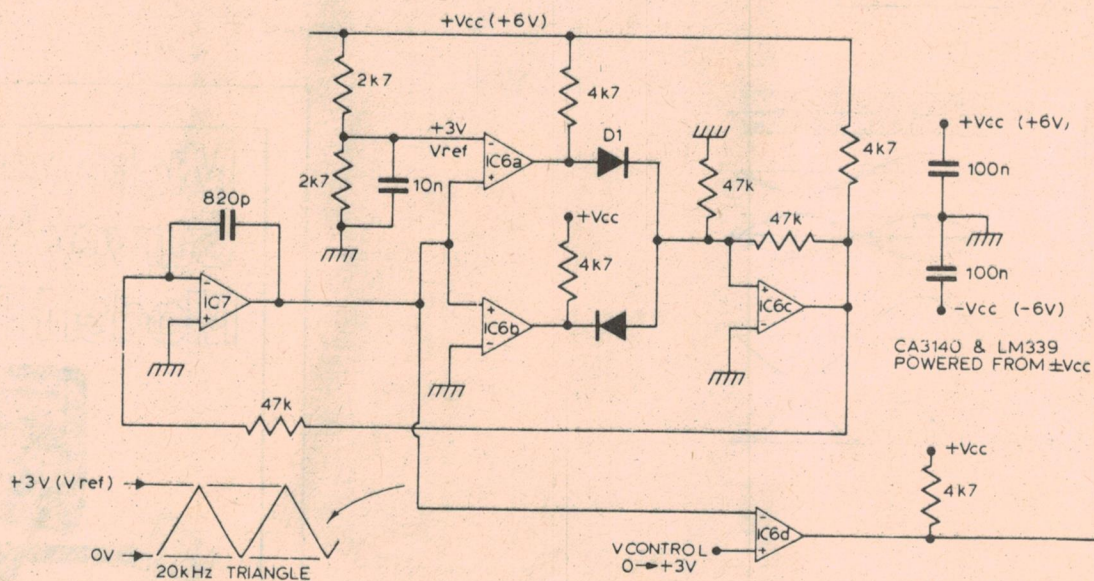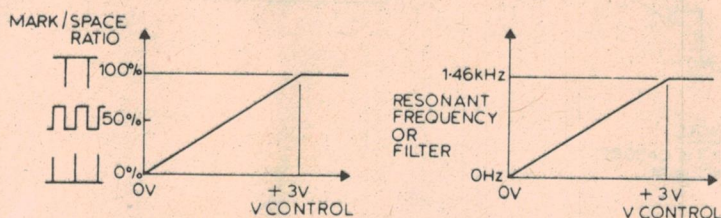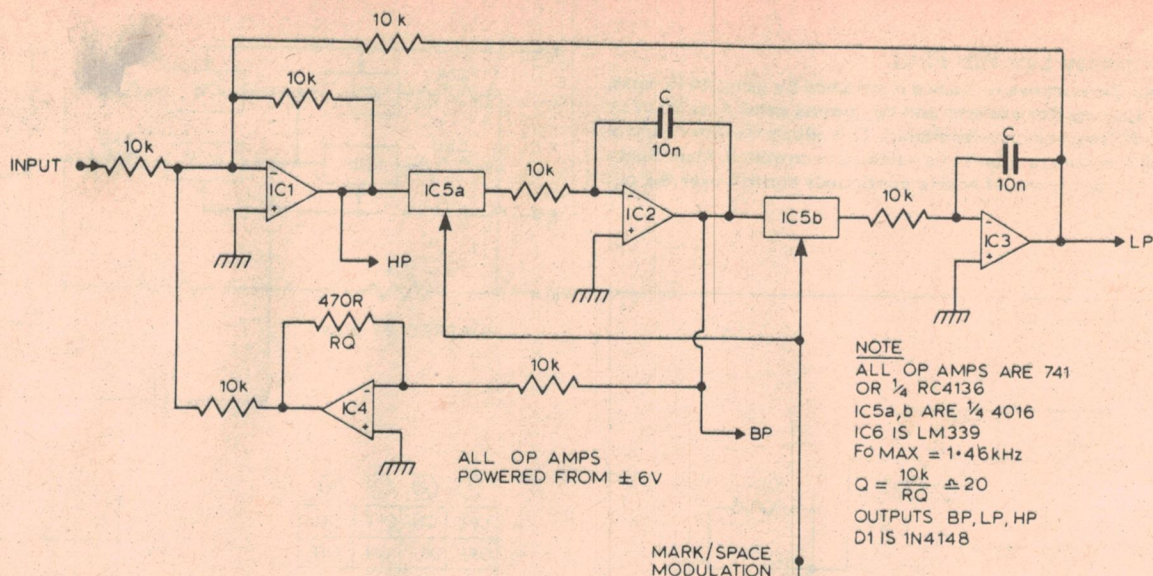

Markspace Modulated Universal Filter

It is possible to change the gain of an amplifier by effectively altering the input resistor. This can be done by markspace modulating a voltage controlled switch in series with the resistor.

When the markspace ratio is low, the switch is 'off' most of the time and the effective resistance is large. When the markspace ratio is high the switch is 'on' most of the time and the effective resistance approaches that of the series resistor.

Having generated a markspace control waveform, it is possible to gang together literally hundreds of voltage controlled switches. This allows the control of large numbers of variables simultaneously.

The circuit consists of a modulated universal filter (ICs 1 to 5) and a markspace generator (ICs 6 and 7).

ICs 7 and 6a to 6c form a triangle/square wave oscillator. IC7 is the integrator whose output ramps up and down between 0V and +3V. IC6a and 6b are fast comparators which detect the end of the integrator travel and switch the schmitt trigger IC6c, which in turn controls the integrator. The output frequency of the oscillator is about 20 kHz.

It is important that the frequency of the oscillator be relatively high. As a rule of thumb it should be 2½ times the highest frequency components of the signal you wish to process. The triangle output is fed into IC6d's inverting input, the control voltage being fed into the non-inverting one. The output of IC6d is the markspace modulation which is used to drive the switches IC5a and b. The filter's resonant frequency is directly proportional to the markspace ratio of the signal that drives the switches and thus is proportional to the control voltage.

RADIO PARTS



WELLER SP40D
240 volt 40 watts
TAX EXEMPT \$11.17



WELLER 8100DK
Instant heat soldering gun,
240 volt, 100 watts.
TAX EXEMPT \$22.82

The BR211 series of ultra-miniature relays (1.55 cu. cm (.1 cu. inch)) allow high component densities for savings in both equipment size and cost. These highly sensitive relays with SPDT contact arrangements are ingeniously designed so as to offer flux-contamination-immunity and load handling capabilities of 1A at 24V DC or 0.5A at 100V AC under a resistive load. The .1" grid spacing of terminals makes these relays ideally suited for printed circuit board applications requiring high density mounting and for use in audio and wireless communications, office and vending machines, various control applications and automobiles.


Available Voltages

BR211A-D00 5 Volt
BR211A-D00 6 Volt
BR211A-D00 9 Volt
BR211A-D0 12 Volt
BR211A-D0 24 Volt


All voltages

\$2.79


incl. tax



SCHEMATIC




WELLER WTCPN

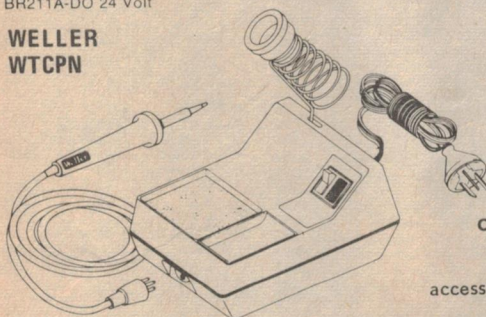

Complete Unit \$55.35

All spares & accessories available from stock.



RAPAR TR-1 TRANSISTOR TESTER

Measurement of general and high power transistors and diodes. Measures I_{CO} & A&B.

INCL. TAX \$29.33

GGI

MODEL 14
Miniature 12V,
12 W Soldering
iron.
exempt \$8.16

Comfortable Finger Grip:
Flared to prevent fingers
slipping onto the warm stem.

Stainless Steel
Stem reduces heat
conduction back
to handle.

Interchangeable Tips

Slim, Extra Flexible
Supply Lead of
Circular
Construction

One piece,
Light Weight
Handle in Safe,
Self Extinguishing,
Non-dripping Plastic.



RADIO PARTS GROUP

COMPREHENSIVE CATALOGUE
A FULLY ILLUSTRATED REFERENCE BOOK
WITH MORE THAN 12,000 LINES DESCRIBED IN DETAIL



THE CATALOGUE PRICE MAILING SERVICE

Over many years we have developed an effective computerised price service and catalogue which has become the reference book for the electronics trade. Order your copy now and increase your product knowledge and efficiency.

For your annual subscription of \$20 you will receive:—

- 4 ILLUSTRATED CATALOGUE SECTIONS
- A NEW HEAVY DUTY, LONG LASTING SILVER POLYPROPYLENE COVER FITTED WITH A MAGAZINE HOLDER WITH 6 METAL RODS FOR EASY INSERTION OF EACH SECTION AND PRICE LIST.
- UP-DATED COMPUTERISED PRICE SERVICES.
- MONTHLY SPECIALS LISTS, MANUFACTURERS SURPLUS STOCK OFFERS AND THE LATEST INFORMATION ON NEW PRODUCTS.
- CURRENT VALVE AND SEMI CONDUCTOR AVAILABILITY LISTS.

Prices listed above are current at printing date but are subject to change without prior notice.

To:

Radio Parts Group,
562 Spencer Street, West Melbourne
1103 Dandenong Road, East Malvern

329-7888.
211-8122.

bankcard
welcome here

Please send me

I am enclosing cheque ☐ money order ☐

Or please debit my Bankcard — Number

\$1 P&P in Aust. Outside Aust. freight on
Write for our comprehensive Semi-Conductor price list.

Signature:

Name:

Address:

P.Code

TASMAN ELECTRONICS

12 VICTORIA STREET, COBURG 3058 Ph. (03) 354-5062

Open Mon - Thurs. 9.00 - 5.30pm. Fri. 9am - 9pm. Sat. 9am - 12.00 noon

Mail orders - please add 70c minimum post and pack.

• TRANSISTORS

AC127	1.25
AC128	.85
AD149	2.60
BC107	.32
BC108	.32
BC109	.32
BC177	.38
BC318	.22
BC319	.22
BC320	.22
BC547	.23
BC548	.19
BC549	.23
BC557	.22
BC558	.22
BC559	.22
BD139	.50
BD140	.50
BFY84	.82
BFY50	.98
BFY51	.78
BF115	.66
MJ2955	.80
MJE2955	1.82
MPF102	.45
TIP31	.89
TIP31C	.69
TIP32C	.72
2N219	.45
2N222A	.25
2N2646	1.15
2N2647	1.15
2N2904	.50
2N2905	.50
2N2905A	.50
2N2907	.45
2N3107	1.00
2N3053	.50
2N3054	1.15
2N3055	.75
2N3300	.75
2N3702	.29
2N3740	1.70
2N3904	.29
2N4030	.90
2N4032	.95
2N4033	1.30
2N4036	1.50
2N4037	1.30
2N4231	.98
2N4234	1.80
2N4238	1.65
2N5088	.30
2N5871	1.50
2N5872	2.00
2N5873	1.50
2N5874	1.65
2N6124	.90
2N6126	1.10
2N6129	1.30
2N6130	1.45
2N6132	1.45
2N6134	1.60
PN3565	.18
PN3566	.18
PN3567	.18
PN3568	.18
PN3569	.18
PN3638	.17
PN3638A	.22
PN3641	.20
PN3642	.20
PN3643	.20
PN3644	.22
PN3645	.22
PN3646	.22
PN3693	.29
PN3694	.29
PN4121	.35
PN4248	.22
PN4250	.29
PN4355	.29
74LS	
74LS00	0.25
74LS01	.28
74LS02	.25

74LS03	.25
74LS04	.30
74LS05	.30
74LS08	.25
74LS09	.28
74LS10	.25
74LS11	.28
74LS12	.28
74LS14	1.15
74LS20	.28
74LS21	.28
74LS27	.28
74LS32	.30
74LS37	.38
74LS38	.38
74LS40	.32
74LS42	.95
74LS73	.60
74LS74	.46
74LS75	.55
74LS78	.50
74LS85	1.20
74LS86	.48
74LS90	.70
74LS92	1.10
74LS93	.80
74LS95	1.00
74LS109	.45
74LS113	.50
74LS114	.50
74LS125	.70
74LS133	.30
74LS138	1.30
74LS151	1.15
74LS157	.75
74LS160	.90
74LS163	1.15
74LS164	1.55
74LS169	1.50
74LS174	.70
74LS175	.85
74LS190	1.25
74LS191	1.20
74LS192	1.15
74LS194	1.95
74LS195	1.00
74LS196	1.30
74LS197	1.35
74LS251	.80
74LS253	.80
74LS257	.70
74LS259	3.20
74LS279	.55
74LS290	1.15
74LS365	.70
74LS366	.70
74LS367	.70

• CMOS

4001	.25
4011	.25
4012	.25
4013	.52
4014	1.30
4016	.55
4017	1.30
4018	1.20
4002	.30
4008	1.20
4007	.30
4020	1.40
4021	1.30
4022	1.30
4023	.30
4024	.90
4025	.35
4028	.95
4040	1.30
4042	1.10
4043	.95
4044	.95
4046	1.55
4049	.55
4050	.55
4051	1.20
4052	1.20
4053	1.20
4066	.75

4068	.35
4069	.30
4070	.35
4071	.35
4072	.35
4076	1.75
4077	.35
4078	.35
4081	.35
4082	.35
4510	1.40
4518	1.40
4520	1.40
4528	1.20
4553	6.75
4555	1.10
4584	.75
40014	.60
40097	.90
40098	.90
74CO2	.35
74CO8	.40
74C10	.40
74C14	1.55
74C20	.45
74C48	2.45
74C73	1.10
74C76	1.15
74C90	1.50
74C175	1.75
74C192	1.85
74C193	1.85

• TTL

7400	.28
7401	.28
7402	.28
7403	.28
7404	.35
7405	.37
7406	.45
7407	.45
7408	.30
7409	.34
7410	.30
7413	.54
7414	.45
7416	.50
7417	.45
7420	.30
7421	.30
7422	.30
7426	.40
7427	.40
7430	.30
7432	.40
7437	.50
7438	.40
7440	.30
7442	.83
7447	1.20
7448	1.20
7450	.30
7451	.30
7453	.30
7454	.30
7460	.30
7470	.50
7472	.50
7473	.50
7474	.50
7475	.72
7476	.55
7480	.95
7483	1.10
7485	1.40
7486	.50
7489	2.87
7490	.40
7491	1.04
7492	.75
7493	.40
7494	1.05
7495	.92
74100	1.95
74107	.55
74180	1.12
74192	1.33

74193	1.33
74121	.55
74123	.85
74132	1.15
74150	1.35
74151	1.10
74153	1.10
74154	1.65
74160	1.40
74173	2.20

• VOLT REGS

7805-12-15-18-24	all 1.20
7905-12-15-18-24	1.60
7805-12-15-18-24	all 40
79L05-12-15-18-24	all 80
78CB	2.30
723	.50
309	2.00
317	2.95

• DIODES

OA90	.15
OA91	.15
IN4002	.08
IN4004	.08
IN4007	.16
IN5404	.35
IN4148	.06
AA330	.33
IN3493	1.70
IN3493	1.70
WO2 BRIDGE	.90
VM48DIL BRIDGE	1.25

• ZENERS

BZX79 Series	
All	.19
BZY88 Series	
All	.40
BZX70 Series	
All	.65

• SCR's

C106Y1	.39
C106D1	.62
C103YY	.99

• RESISTORS

1/2W E24	.3
1W E12	.7
5W W/W	.25
Min presets all values	.18
Min. trimpot all values	.48

• LINEAR IC's

741	.35
747	1.15
3900	.99
301	.45
307	.86
311	.65
324	1.20
555	.35
RC4136	1.35
308	.95
380	1.70
381	2.87
TL071	.73
TL080	1.15
TL081	.52
TL082	.95
CA3140	1.50
556	1.20
565CH	3.45
567	3.12
1488	.96
93448	10.20

• OPTO

9368	1.90
MCT2	.65
FND357	1.40
LED red	.20
LED green	.30
LED amb.	.43

• TANTALUMS

TAD-35V	
0.1-1uf	.15
1.5uf	.20
2.2uf	.25
3.3uf	.25

6.8uf	.30
15uf	.55
22uf	.55
4.7uf/16V	.20

• CERAMICS

1pf-0.0047	.5
0.0068-0.01	.8
0.1	.12
0.22	.18
0.47	.24

• ELECTROLYTIC

PCB TYPE	
6.3v 470uf	.20
10v 4.7uf	.08
22uf	.10
100uf	.12
16v 10uf	.08
22uf	.12
47uf	.12
100uf	.15
220uf	.15
470uf	.23
640uf	.42
1000uf	.37
2500uf	.62
25v 1.5uf	.08
2.2uf	.08
3.3uf	.08
10uf	.08
25uf	.12
100uf	.18
220uf	.24
330uf	.24
470uf	.32
1000uf	.48
35v 2.2uf	.08
3.3uf	.08
10uf	.11
100uf	.18
220uf	.21
220uf	.21
1000uf	.53
2000uf	.71
2200uf	.88
50v 0.47uf	.08
2.2uf	.08
4.7uf	.10
10uf	.12
25uf	.15
47uf	.16
100uf	.23
220uf	.37
330uf	.40
470uf	.77

• MISC.

Speaker Wire (Clear)	17Mt.
Mic. Cable 1c (Shielded)	.25
Phone Cable, 4c	.25Mt
H/U Wire	
7/254	10Mt
10/254	12Mt
617K/11	20Mt
FUSEHOLDERS, 3AG	
Panel	.65
In Line	.28
PC Mount	.46
fuses, 3AG 0.5- 5A	.13
TO3 Sockets	.22
Thermal Grease in Syringe	1.25
Inst. Knobs	.38
Panel Meters	
KM66vu	12.50
Multimeters	
DMM10	89.70
PDM35	73.60
RELAYS	
12v, 220Ohm Coil 1A Con-	
tacts	4.95
12v, 220Ohm Coil 5A Con-	
tacts	6.45
Triac, Sc141D	.95

Other lines in stock include: Battery chargers and adaptors, instrument cases and boxes, audio and TV leads-plugs-sockets, Dmm's, potentiometers, switches, stylii, transformers, PHILIPS Speakers and System kits, vast range of Records and Cassettes. We are also Dealers for AIWA quality HI-FI products. Prices current till February 28.

Masthead Strobe

Improve your visibility with this project.


TO A YACHTSMAN, one of the greatest fears of either a long ocean passage or negotiating busy coastal waters is being hit by another, and probably much bigger ship at night. A large fast ship on computer steerage could pass over the top of a small craft without knowing it.

Conventional masthead lights are barely adequate, being typically 5 to 25 watts, and almost useless in a storm or fog. As the wattage of the light is increased the current drawn from the ship's limited battery capacity becomes prohibitive. The answer is to use a xenon flash tube giving an intense white flash about every two seconds. Equivalent to many thousands of watts, the flash can be seen for large distances, even in bad conditions. The average power of this beacon is only about 1.5 watts, similar to a torch bulb. The unit can be permanently mounted on the mast or kept portable for emergency use.

Construction

The assembled pcb together with the two storage capacitors are mounted in a Horwood Instrument case type 34/4/D. Styrofoam is used to hold the pcb in position to avoid having to drill extra holes in the case. The transformer used is a commonly available Ferguson type PL30/5VA, which mounts directly onto the pcb.




The storage capacitors used are designed for operation in fluorescent lights and are rated at 240 Vac. These capacitors which can withstand a high

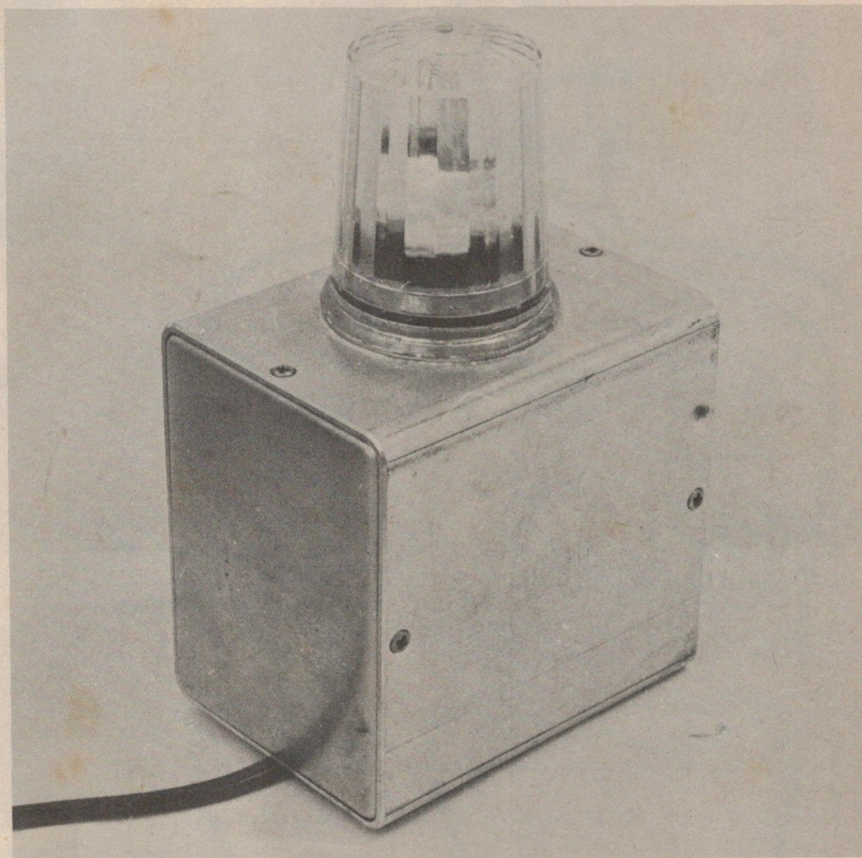

SPECIFICATION PROTOTYPE - ETI 558

Voltage	11 - 15 volts
Light output	1 watt per sec
Flash rate	Approx. 1 every 2 sec
Supply Current	80 mA average

Project 558

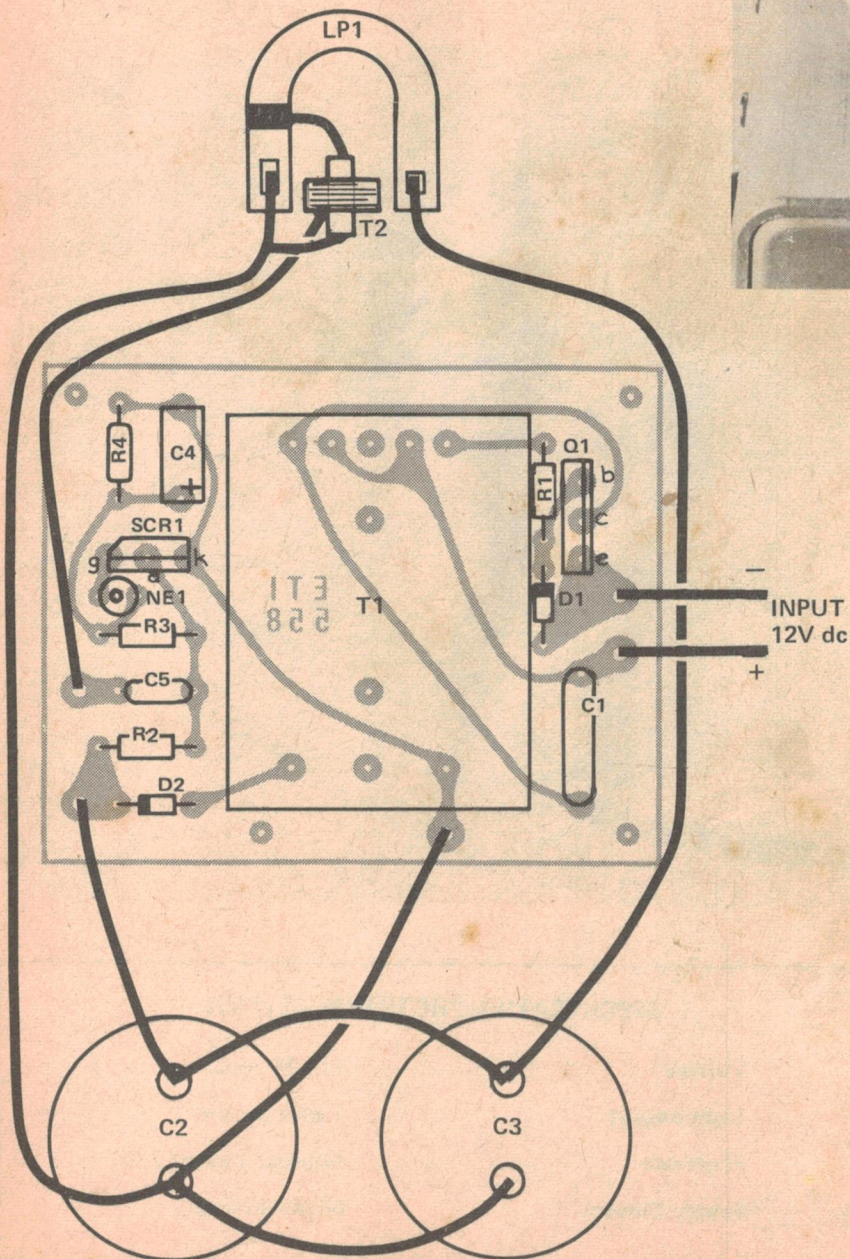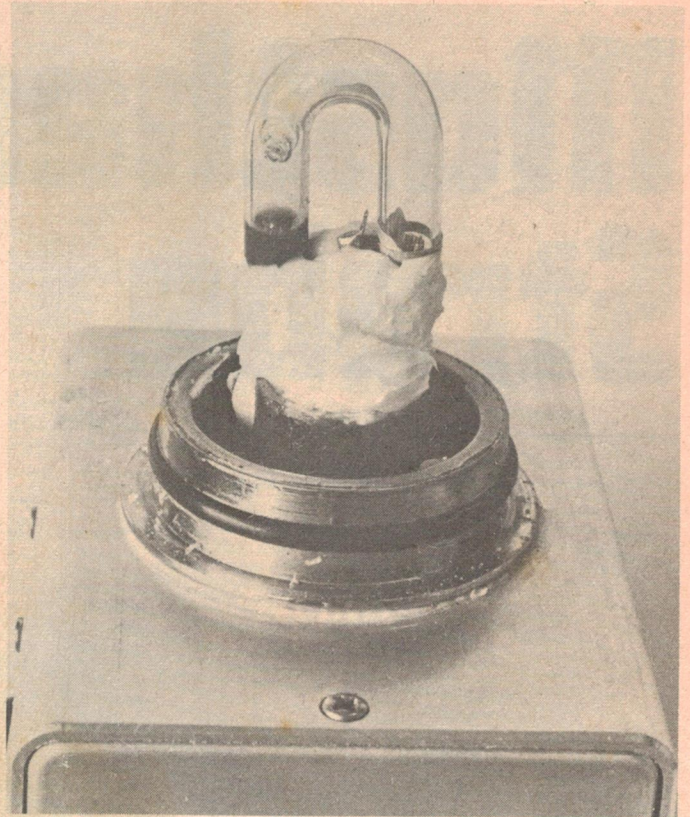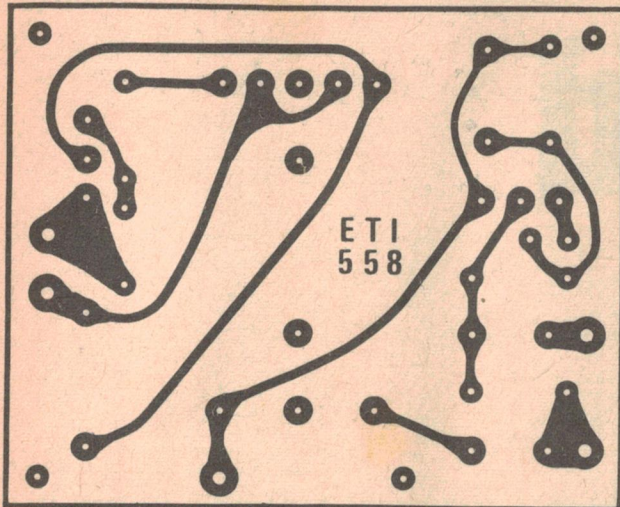

PARTS LIST – ETI 558

Resistors all 1/4W, 5%

R1 12k
R2 2M2
R3 1M5
R4 4M7

Capacitors


C1 270n greencap
C2, 3 6μ5 250 Vac (see text)
C4 1μ0 350 V electrolytic
C5 100n 400V polyester

Semiconductors

Q1 MJ3055
SCR1 C106D
D1 1N914
D2 EM410

Miscellaneous

T1 Ferguson P30/5VA transformer
T2 trigger transformer to suit strobe tube
NE1 NE2 neon
Strobe tube see text
Horwood box type 34/4/D, light fitting (see text), pcb ETI 558, Silastic adhesive/sealant.

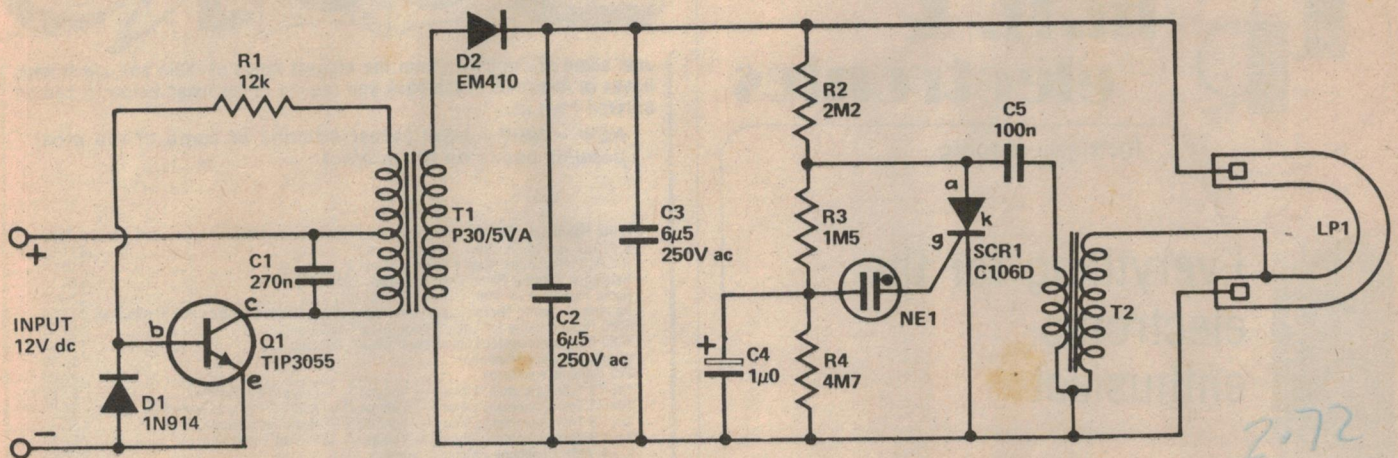

dc voltage, are suitable for use in fast discharge applications and are available in a variety of values from any electrical supplier or from Dick Smith Electronics.

Special attention must be paid to the light housing if the unit is to be left out in the open in all weathers. We purchased an easily available Hilite Marine masthead light from a local marine shop.

The tungsten light and its socket were removed and the strobe tube to-

gether with its trigger transformer were fixed into the base of the fitting with Silastic rubber. This light fitting has a lens which focusses the light, and a rubber 'O' ring which should be covered with silicon grease to prevent moisture penetration. If the beacon will not be left out in all weathers a cheaper automotive light fitting could be used.

To ensure long life from the strobe tube we used a 10 watt per sec. tube run at only a fraction of its full output. The

tube we used was a CZT127 available together with a trigger transformer from *Circuit Components, 383 Forest Rd, Bexley, NSW.*

Finally the ends of the box and the light fitting were fixed into position with copious amounts of Silastic rubber to prevent moisture penetration. The battery lead should be taken out through a hole in the bottom of the box which also allows drainage if any water manages to get in.


HOW IT WORKS – ETI 558

The power transistor Q1, together with the transformer, T1, form an oscillator with a frequency of about 1kHz. Feedback is provided by one half of a centre tapped 30 volt winding. The output is taken from the normal 240 volt primary winding of the transformer. The amount of feedback and hence the output voltage is set by R1.

Output from the transformer is rectified by D2 and then charges the storage capacitors C2 and C3. The value of R1 should be selected to give a peak voltage across the storage capacitors of about 350 - 400 volts.

As the voltage across the storage capacitors builds up the trigger capacitor, C5, charges through R2 and the primary of the trigger transformer, T2. The timing capacitor, C4, is also charged through R2 and R3 until the voltage across the neon, NE1, reaches about 120 volts, when the neon fires, dumping the charge from C4 into the gate of SCR1. This fires SCR1 which then discharges C5 through the primary of the trigger transformer, producing a high voltage pulse to initiate the discharge of C2, 3 through the strobe tube.

The storage capacitors are then recharged and the process repeated for the next flash.

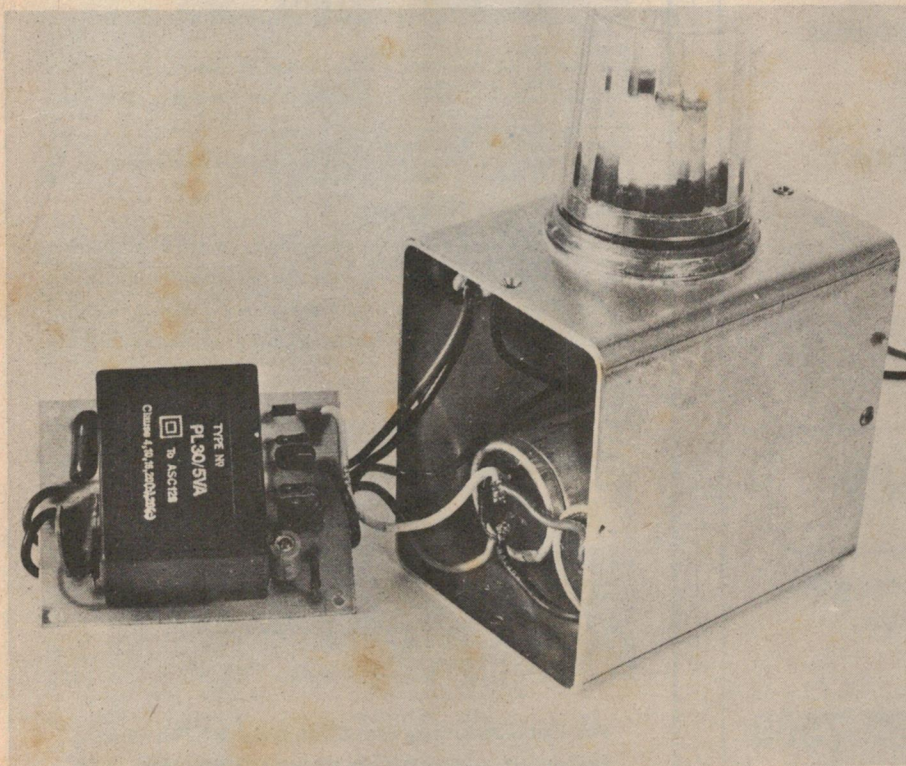



**hi.fi. &
electronics**

formerly Kitsets

**Everything for the
electronic
enthusiast**

**We are major stockists of
the following items:**

Transformers.
Capacitors (all types).
Resistors (1/4, 1/2, 1.5 and 10 watt).
Zippy boxes.
Semiconductors (all types).
Knobs (plastic and aluminium).
Audio plugs and sockets.
C.B. plugs and sockets.
Speakers (Fosters, Philips, Etones).
Speaker kits complete.
Hi-Fi. Still some L&G left at great prices.
Soldering irons.
Solder.
Soldersuckers.
Audio cartridges & replacement styli.
Multimeters.
Innerbond.
Grille cloth.
Valves.
Veroboard.
Ferric chloride.

we are

silicon valley
distributors

**All this and much more. Why not give
one of our two stores a ring now.**

BRISBANE

(07) 52-8391

293 St. Pauls Terrace
Fortitude Valley

DEE WHY

(02) 982-7500

657 Pittwater Road.
Dee Why

BOOKS

Just some of the books from the biggest range of radio and electronics books in Australia. If the book you require is not listed below, it can be ordered from us.

NEW - NEW - NEW Latest editions of some of the most popular books on the subject:

ARRL Handbook 1979 Edition (avail. end February early March)	\$13.95
R.S.G.B. Handbook (New Edition) Volume 1	\$21.85
R.S.G.B. Handbook (New Edition) Volume 2	\$18.90
Reference Data for Radio Engineers (New Edition) (I.T.T.)	\$40.50
Radio Handbook — 20th Edition (William Orr)	\$26.50
An Introduction to Microcomputers — Volume 1 — Basic Concepts (Adam Osborne)	\$13.50
6800 Programming for Logic Design (Adam Osborne)	\$13.50
8080 Programming for Logic Design (Adam Osborne)	\$12.55
Weather Satellite Handbook	\$7.80
VHF Antenna Handbook	\$7.80
The 73 Test Equipment Library — Volume 1 — Component Testers	\$7.80
The 73 Test Equipment Library — Volume 2 — Audio Frequency Testers	\$7.80
The 73 Test Equipment Library — Volume 3 — Radio Frequency Testers	\$7.80
The 73 Test Equipment Library — Volume 4 — IC Test Equipment	\$7.80
IC OP-AMP Cookbook (Walter C. Jung)	\$17.80
TTL Cookbook (Lancaster)	\$12.95
TV Typewriter Cookbook (Lancaster)	\$14.20
CMOS Cookbook (Lancaster) 1st Edition 1977	\$15.00
Active Filter Cookbook (Lancaster)	\$20.25
IC Timer Cookbook (Jung)	\$14.00
Transistor Specifications Manual — 8th Edition	\$9.90
Transistor Substitution Handbook — New Edn. No. 17	\$7.95
Master Tube Substitution Handbook (Tab Books)	\$7.00
Australian Electrical Wiring Theory and Practice (Pathebridge & Williams)	\$11.45
Electronic Components and Materials (Philips)	\$3.95

American Radio Relay League Publications:

Hints and Kinks for the Radio Amateur	\$7.20
The Radio Amateur's VHF Manual	\$7.20
A.R.R.L. Antenna Handbook	\$8.80
Understanding Amateur Radio	\$8.80
The Radio Amateur's License Manual	\$6.20
A Course in Radio Fundamentals	\$7.20
Specialized Communications Techniques for the Radio Amateur	\$7.20
FM & Repeater for the Radio Amateur	\$7.20
Single Sideband for the Radio Amateur	\$7.20
Ham Radio Operating Guide	\$7.20
Electronics Data Book	\$7.20
Solid State Design for the Radio Amateur	\$12.80
Learning to Work with Integrated Circuits	\$4.00
Getting to Know Oscar from the Ground Up	\$6.20

Microcomputers/Microprocessors Books:

Microcomputers/Microprocessing: Hardware, Software and Application (Hilburn & Julich)	\$26.50
Microcomputer Primer (Waite & Pardee)	\$10.75
How to Buy and Use Minicomputers and Microcomputers (W. Barden, Jr.)	\$13.50
How to Program Microcomputers (W. Barden, Jr.)	\$12.25
The 8080A Bugbook — Microcomputer Interfacing and Programming (Sams publication)	\$14.25
Beginner's Guide to Microprocessors (Charles M. Gilmore)	\$7.95
Getting Acquainted with Microcomputers (Lou Frenzel)	\$11.95
Understanding Microcomputers and Small Computer Systems (Scelbi publication)	\$15.40
The Scelbi Byte Primer (Ed. Wadsworth & Helmers)	\$16.80

Howard W. Sams Publications:

Electric Guitar Amplifier Handbook (Jack Darr)	\$14.80
Transistor Fundamentals — A Programmed Learning Course — Volume 1 — Basic Semiconductor and Circuit Principles (Robert J. Brite)	\$7.75
Transistor Fundamentals — A Programmed Learning Course — Volume 2 — Basic Transistor Circuits (Charles A. Pike)	\$7.75
Transistor Fundamentals — A Programmed Learning Course — Volume 3 — Electronic Equipment Circuits (Martin Gersten)	\$7.75
Transistor Fundamentals — A Programmed Learning Course (Louis Schweitzer & Reginald H. Peniston)	\$7.75

Other Titles:

Color Television Theory (Hutson)	\$15.40
Radio Valve and Semiconductor Data — 10th Edition (Compiled by A. Ball)	\$4.25
Wind/Solar Energy — For Radio Communications and Low Power Electronic/Electric Applications (E. Noll)	\$11.30
Sound System Engineering (Don & Carolyn Davis)	\$26.95
Servicing with the Oscilloscope — 2nd Edition (Gordon J. King)	\$12.00
73 Dipole and Long-wire Antennas (Edward M. Noll)	\$7.80
73 Vertical, Beam and Triangle Antennas (Edward M. Noll)	\$7.50
World DX Guide — 1st Edition (Ed. J.M. Frost)	\$9.95
The Radio Amateur Antenna Handbook (Orr & Cowan)	\$8.20
VHF Handbook for Radio Amateurs (Brier & Orr)	\$7.00
Shortwave Listener's Guide (Charles Woodruff)	\$6.75
Making and Repairing Transistor Radios (W. Oliver)	\$5.40
The Complete Handbook of Public Address Sound Systems (F. Alton Everest)	\$11.30
The Handbook of Telephones and Accessories (John Sunier)	\$14.00
Modern Recording Techniques (Robert E. Runstein)	\$14.25
Video Tape Recorders (Harry Kybett)	\$13.50
Amateur Radio Techniques — 6th Edition (P. Hawker)	\$9.35

For mail orders please add: \$1.40 Local \$1.75 Interstate


McGILL'S AUTHORISED NEWSAGENCY PTY. LTD.

187 Elizabeth Street, Melbourne. Phone: 60-1475-6-7

Prices Subject to Alteration

Jaycar New Audio Kits and Components

AUDIO SPECTRUM ANALYSER

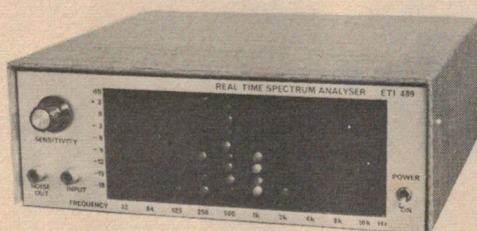

The 489 Analyser can be used in conjunction with a Graphic Equaliser to accurately equalise systems for room acoustics.

Features:


- Ten octave spaced displays.
- LED readout in 3 dB steps.
- Input sensitivity control.
- Inbuilt pink noise generator.

Complete kit includes matched LED's, polarised plastic display, complete metalwork, etc.

ONLY \$142 plus \$3 freight.

Please include stamped, addressed envelope with all enquiries

485 GRAPHIC EQUALISER

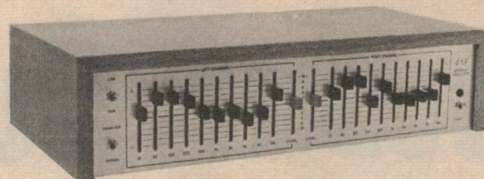

- 10 adjustable controls on one octave centre frequencies (independent for each channel).
- Symmetrical mirror image boost and cut of 13 dB at any centre frequency.
- Full spectrum gain control for each channel with a range of 14 dB gain to 9 dB attenuation.
- Vertical slide controls give a graphic representation of the resulting response curve.
- 100 percent monolithic active circuitry. Hum, ring and saturation free gyrator design.
- Facility for tape monitoring.
- Optional standard 19" rack mounting adaptor available.

COMPLETE KIT \$118 P&P\$3.

jaycar

PTY LTD

PO Box K39, Haymarket.
NSW. 2000. 405 Sussex Street,
Tel: 211-5077.

TRANSPAC

A TRADENAME OF THE TRANSIENT GROUP

Inexpensive prepacked components from top manufacturers.

NOW YOU CAN BUY
PREPACKED ELECTRONIC
COMPONENTS IN SMALL
QUANTITY PACKS AND SAVE!

From your local
stockist or mail
order (45c P&P)



**Included in the ever-expanding range of Transpacs are:

PACK PRICING EXAMPLES:

S101 2x7400's 49c
S104 2x7410's 49c
S108 2x7421's 56c
S201 *10xRed led's \$1.95c
S302 5x2N3638A's \$1.09c
H101 5x8 pin I.C. sock. \$1.05c

Capacitors,
resistors,
chokes,
transistors
linear
and digital
I.C.'s & sockets, nuts & bolts, solder, switches, knobs,
tagstrips, veropins, regulators, fuses, optos, thermistors, etc,
etc

TRANSPACS ARE A NEW
WAY TO BUY FULL SPEC.
COMPONENTS AT VERY
REASONABLE PRICES.
SEMICONDUCTOR PACKS ARE
SUPPLIED WITH RELEVANT
DATA AS AN AID TO THE
CONSTRUCTOR.

CUSTOMER INFORMATION

Please mark relevant box.

☐ Price list required.

☐ We are interested in becoming TRANSPAC stockists.

NAME.....

ADDRESS.....


P/c

ETI 2/9

197 Shannon Ave, Geelong West. 3218. Phone: (052) 9-2115
(Due to delivery costs prices may vary between stockists)

dc Power Supply

This new power supply has high current, high voltage capability.

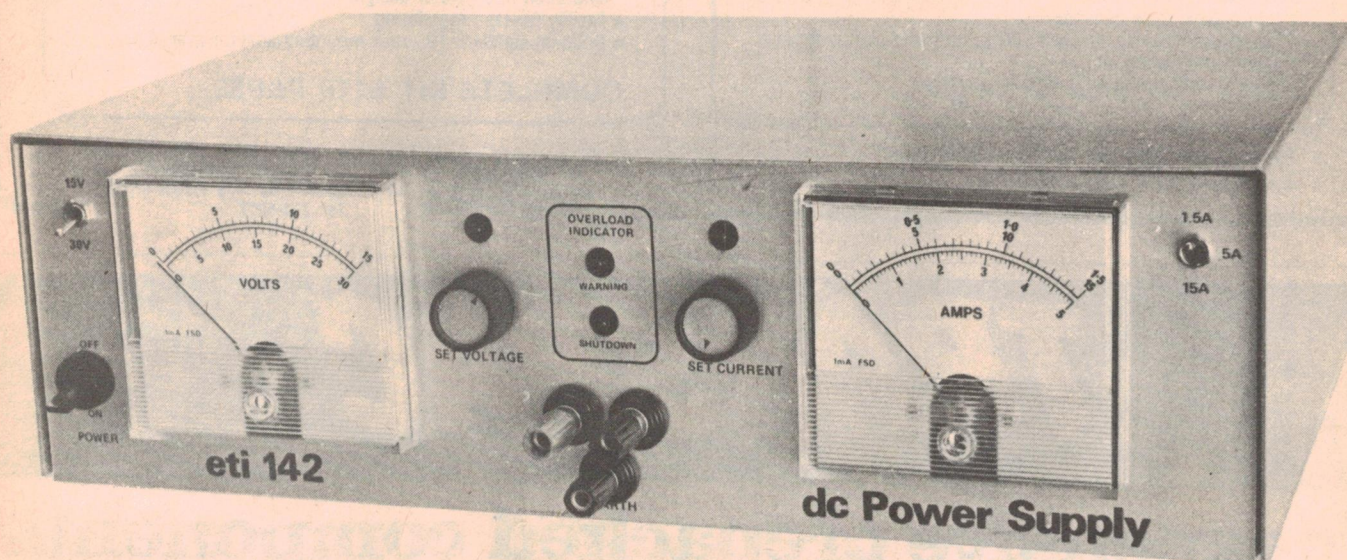

SPECIFICATION - ETI 142

Output voltage	0 - 30V
Output current	0 - 15A
Regulation	20mV (0 - 15A)
Ripple and noise	10mV
Metering	
Voltage	0 - 15V, 0 - 30V
Current	0 - 1.5A, 0 - 5A, 0 - 15A

Overload indication	
Warning	if run continuously in this mode supply may shutdown.
Shutdown	if transformer gets too hot due to a continuous overload the supply will shut down until it has cooled.
Maximum output (not continuously)	24V 15A 26V 12.5A 28V 11A 30V 8A

THIS POWER SUPPLY was designed to extend the range of dc supplies we have published over recent years. It is capable of supplying voltages from zero to 30 volts and current up to 15 amps. The techniques used allow a high power output while retaining a small physical size.

Design Features

Once again, as with all power supply designs, there is a choice to be made as to the technique of regulation to be used. Starting from the most efficient we have:

The switched-mode power supply

With this system the mains voltage is rectified to give 340 volts dc and an inverter using an inexpensive ferrite transformer gives the low voltage required. While regulation against line and load changes can be built in, it is not suitable where the output voltage has to be variable over a large range.

Switching regulator

This utilizes a conventional transformer/rectifier but the regulation is done by switching the output at about 20 kHz with a variable markspace ratio. The output is filtered by an LC network with a diode protecting the switching transistor. This system is efficient but is fairly complex where good regulation is needed and some 20 kHz ripple appears

on the output.

SCR regulator

This simply uses two SCRs in the rectifier circuit with the phase angle of their firing controlling the output voltage. This scheme has the disadvantage of having a slow response time and normally a choke input rectifier/filter is necessary.

Series regulator

This is the most common regulator in use today and has good response time, ripple rejection and regulation. Power dissipation however is high when drawing high currents at low voltages on a variable output unit. It is usually used up to about 100 watts with other systems used above this.

Shunt regulator

This is normally limited to about 10 watts, for, while the performance is very good, the dissipation is more than the maximum output on no load.

When we originally built the unit we intended using an SCR pre-regulator followed by a series final regulator. The SCR pre-regulator was to give an output about 5V above the required output. To reduce cost and size we chose not to use a choke input filter. While we could regulate the output the transformer became hot with low (dc) output voltage. The reason soon became apparent when some maths was done.


At low voltages a very short SCR

conduction time is used and as the current out times time must equal current in times time for the main capacitor the input current can be 5 or 10 times the dc load current. As heating of the transformer is due to the current in the windings and not the thru-power it got hot.

We then changed to a switching pre-regulator with a series final regulator. With this design the transformer output is rectified and filtered before being regulated. This system allows higher load currents to be taken at lower output voltages without the necessity of a range switch.

Problems arising from the use of a switching regulator are mainly due to the high current and fast voltage transients generating radio frequency interference (RFI) and voltage transients in the output. The RFI problem was solved mainly by the use of an earthed shield on one side of the pc board and the addition of input and output filters.

Initially we intended to vary the mark-space ratio to compensate for the 100 Hz ripple making it easier on the series regulator. However the prototype exhibited a tendency to oscillate at around 1 kHz due to the delays in the output filter; either a more complicated control circuit would be needed or we should let the series regulator get rid of the 50 Hz ripple. We chose the second approach.

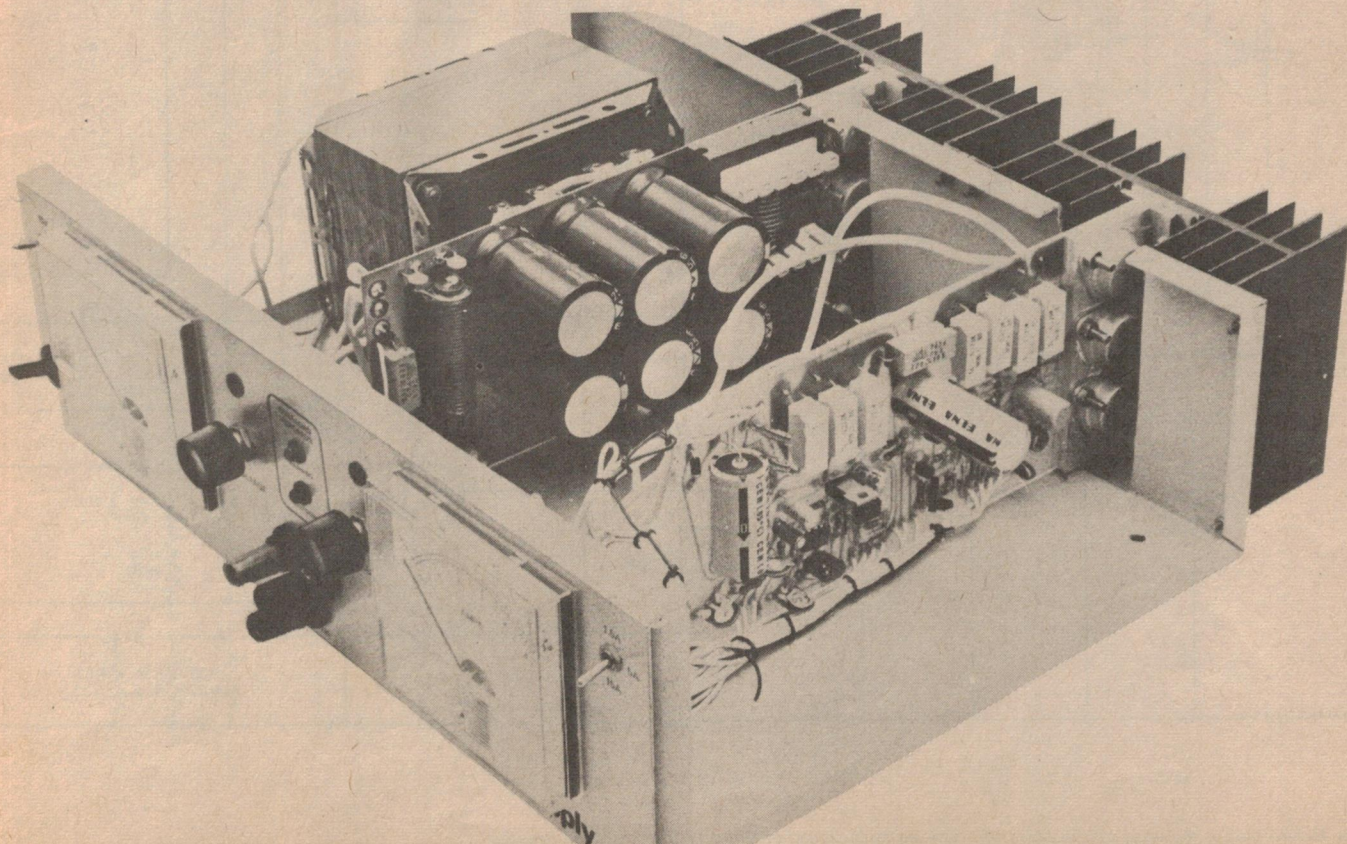

Project 142


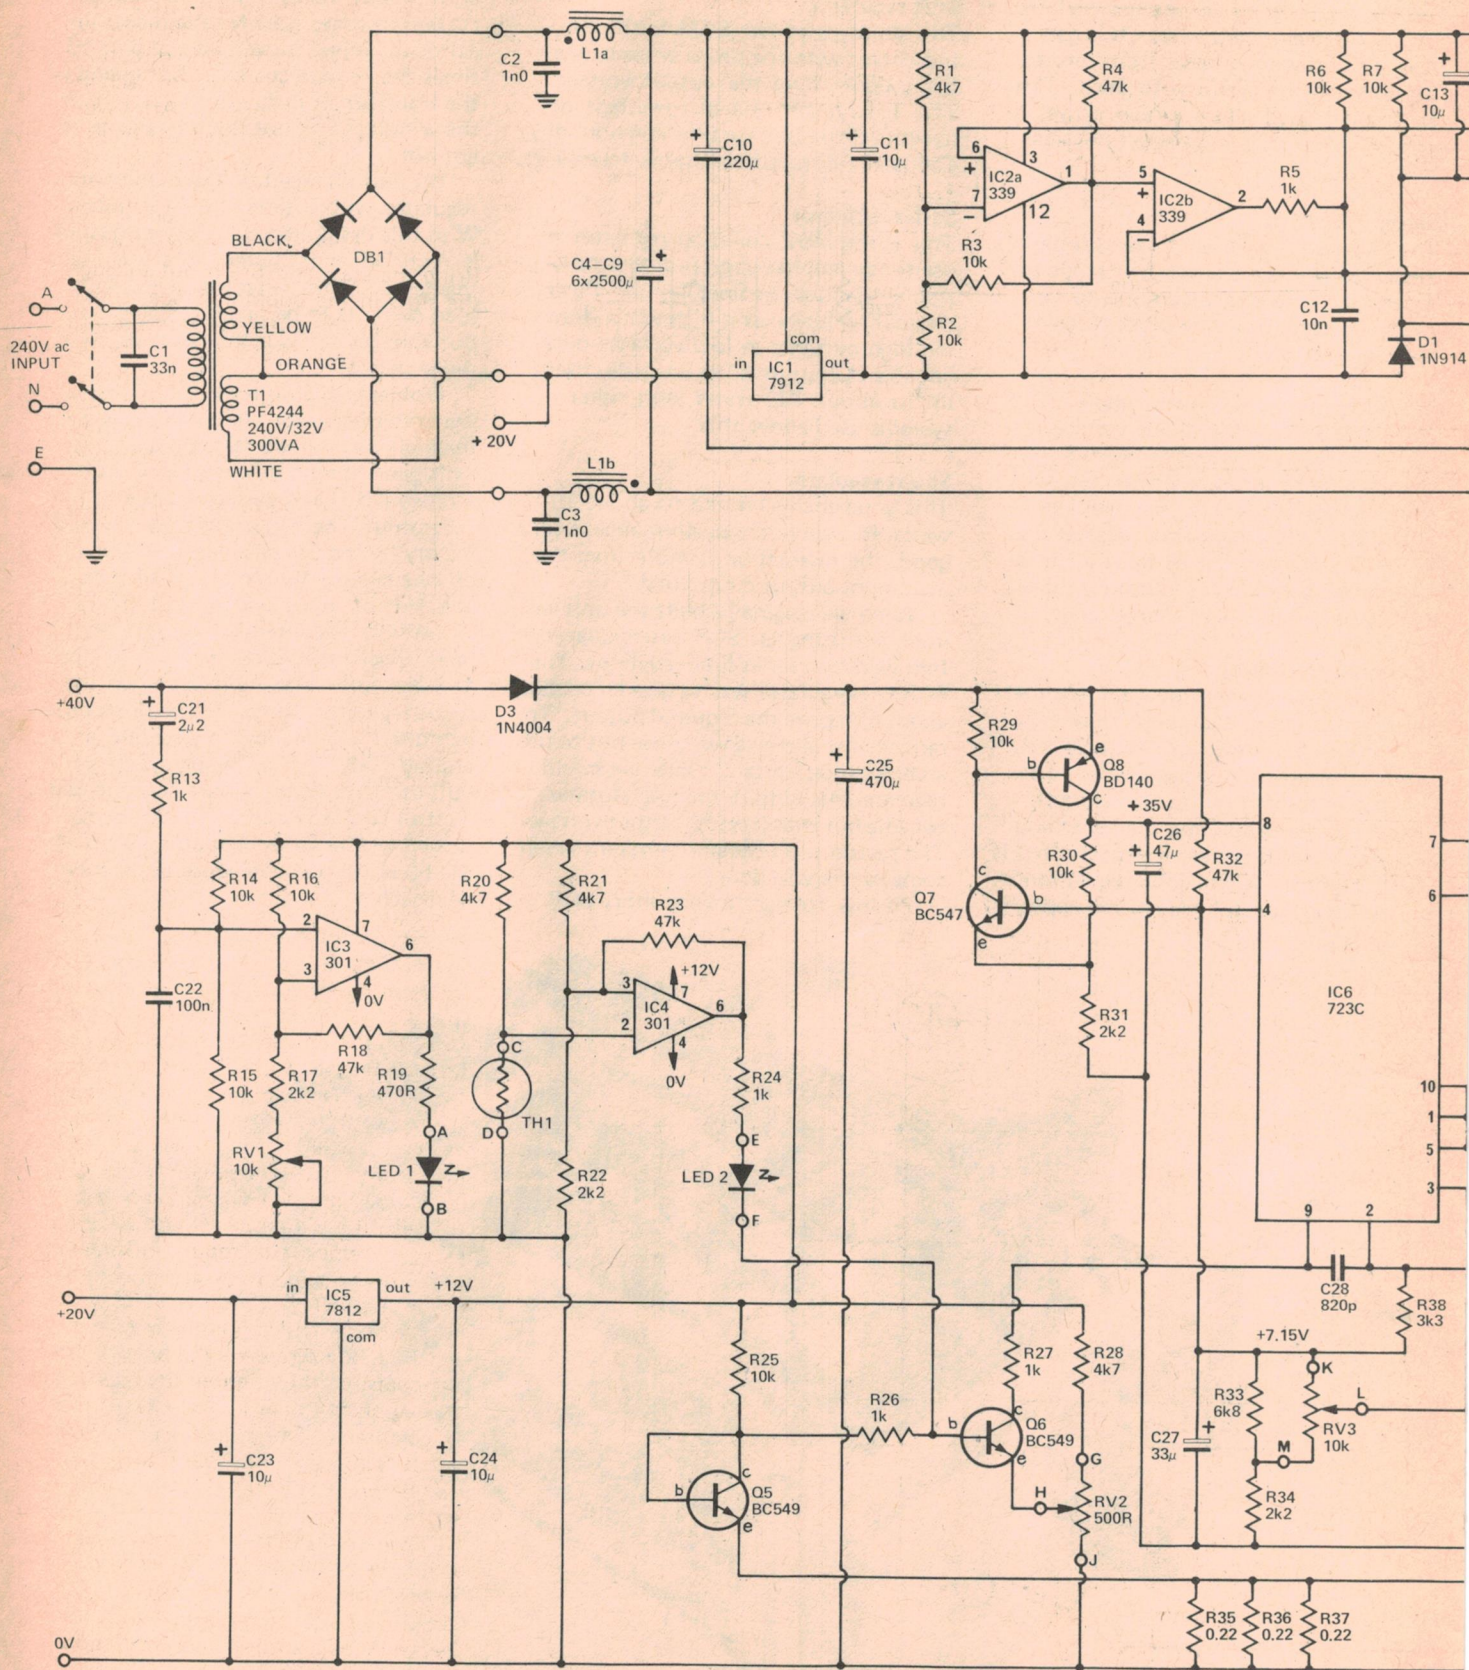


Fig. 1. The circuit diagram of the switching pre-regulator (top) and the series regulator (lower).

dc Power Supply

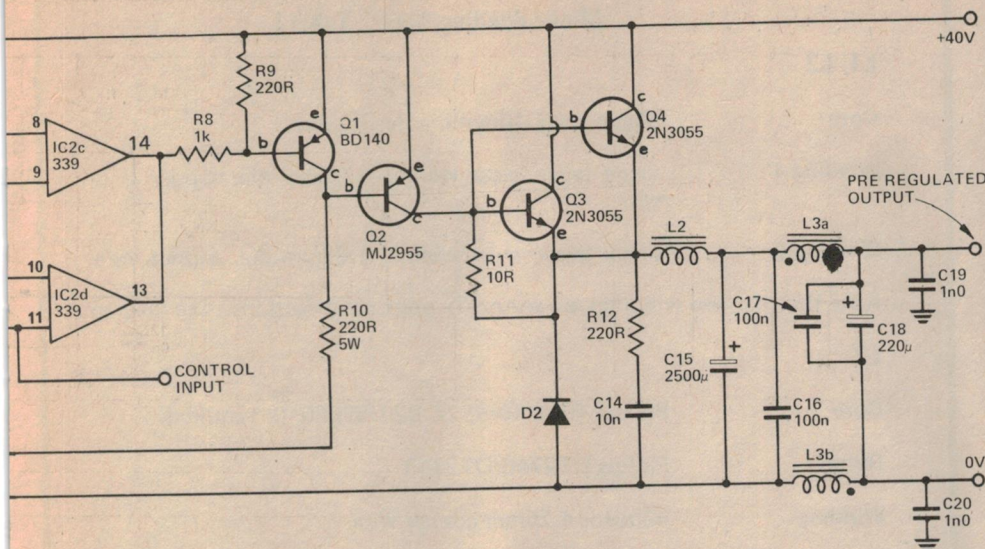

Construction

The two chokes on the ferrite rods can be wound according to table 1, and the appropriate diagram. Note that the two layers are wound in *opposite* directions and that the start and finish of each coil occurs on diagonal corners. After winding the first layer it is best to smear epoxy cement over it so that it will stay in place.


The main choke can now be wound with four close-wound layers of wire. Bring the start and finish out through the slots in the bobbin. Smear some epoxy over the outer layer to prevent movement and, after it has set, break the ends of the bobbin off as shown in the photograph. This is to enable the coil to be fitted through the hole in the pc board. Break the ends on the *opposite* side to the start/finish.

In the switching regulator the only emitter resistor used with the output transistors is a length of pc board track. It is necessary to ensure that the two transistors used have reasonably close base-emitter voltages. A selection can be made from the five used in the unit by joining the base and collector with a lead and passing 2 to 3 amps from collector to emitter (unless a current source is available it may be simplest to use a 12V battery with a 24-32W globe in series). The two which have the closest base-emitter voltages should be used.

Begin assembly of the switching pre-regulator board by mounting the board on the heatsink brackets with the transistors. As the current passes through the mounting screws it is recommended that 4BA or 4 mm brass screws be used. Also, tin the area where the screws contact the board. Some insulating tubing should be inserted in the holes to prevent the screws touching the sides. Mica insulation washers should be used under the transistors with silicon grease on *both* sides of each washer and also between the two brackets. Before tightening up, temporarily mount the brackets onto the heatsink to ensure that the mounting surface mates well. Tighten a couple of the screws holding the brackets onto the board remove the bracket from the heatsink, then tighten the rest of the screws on the board. As it takes the silicon grease some time to spread out it is best to re-tighten these screws again just before the unit is finally mounted on to the heatsink.

Check that the insulation washers are doing their job and solder the base and emitter leads of the transistors. The diode can also be mounted onto the heatsink using mica and insulation around the stud.

The rest of the components can now be mounted with the exception of the main choke, L2. Be careful that none

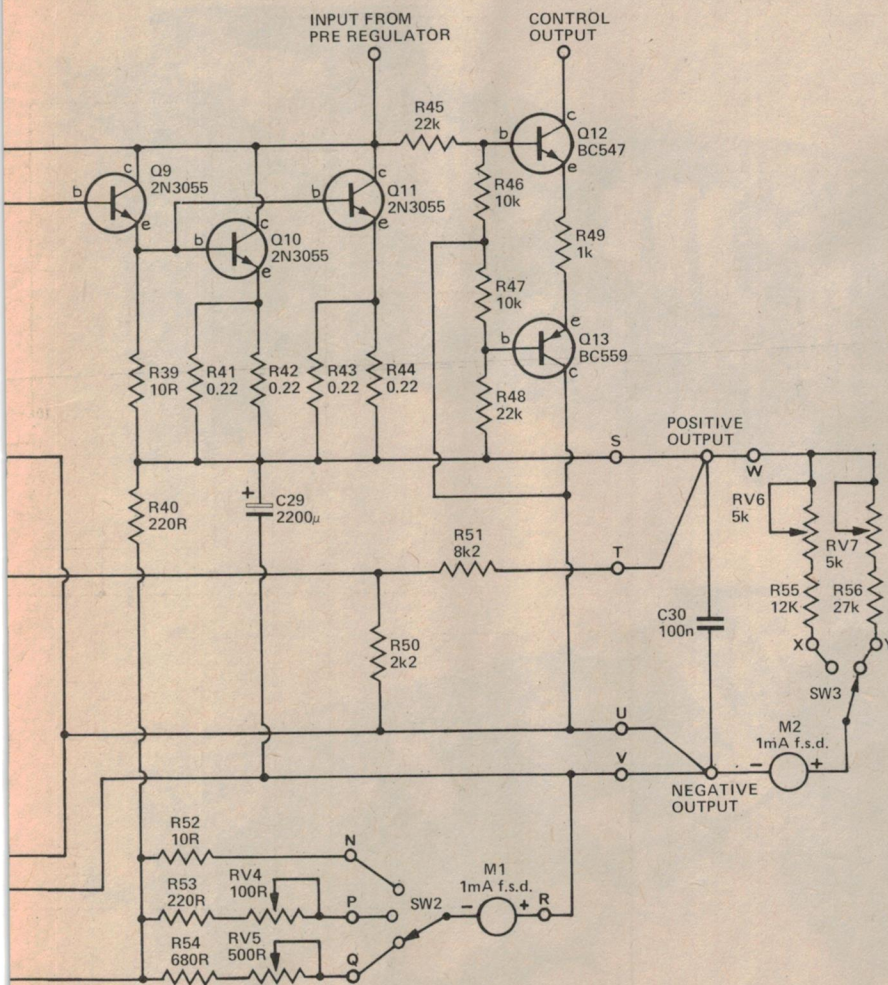

Owing to space limitations, it is not possible for us to print the printed circuit patterns or the metalwork drawings. However, these are available directly from ETI on receipt of a large, stamped self-addressed envelope. Send it to: PSU Drawings, Electronics Today, 15 Boundary Street, Rushcutters Bay, NSW 2011.


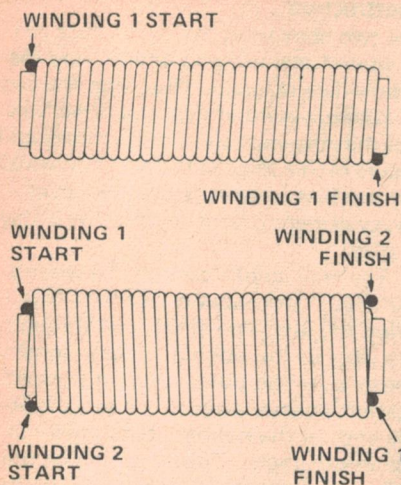


Fig. 2. L1, L3 with the first layer wound (top) and with both layers wound (lower).

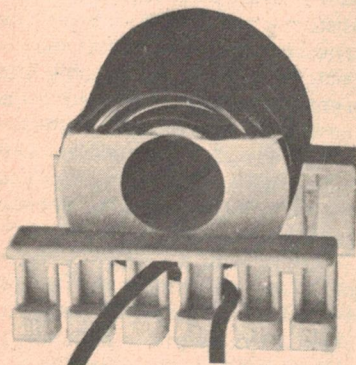

of the components touch the earth screen (with the exception of C2, 3 and C19, 20 which go to ground).

Mounting the Core

Cut two pieces of card or some other non-ferrous material, about 10 mm x 10 mm with a thickness of about 5 mm. These are glued onto the outer legs of one half of the core of L2. Several pieces can be laminated to give the required thickness if required. Slide both halves of the core into the former and bend the leads into such a position that the assembly will fit into the holes provided with no stress on the leads. Lift the coil out, clean the insulation off the leads where needed, place some epoxy on the side of the cores which contact the pc board and refit to the board. When the epoxy is set, the leads can be cut and soldered.

The start of the assembly of the series regulator board is similar to the first board with the exception that there is no power diode used. The board can be assembled according to the overlay — the only point to watch being that the 5 watt resistors should be mounted off the board by 1 or 2 mm, especially if anything but a fibreglass pcb is used (the resistors get warm!).

Start wiring by cutting 17 pieces of

Choke Winding Data Table 1



L1, L3

Core	50mm long, 10mm dia. ferrite rod
Winding 1	single layer, close wound, 1.25mm dia. copper wire
Winding 2	single layer, close wound, 1.25mm dia. copper wire

Note that the two windings are wound in opposite directions. See diagram.

L2

Core	Philips FX3740/4322 020 52520 (2 required)
Bobbin	Philips DT2740/DT2743
Winding	48 turns 1.25mm copper wire
Gap	5mm

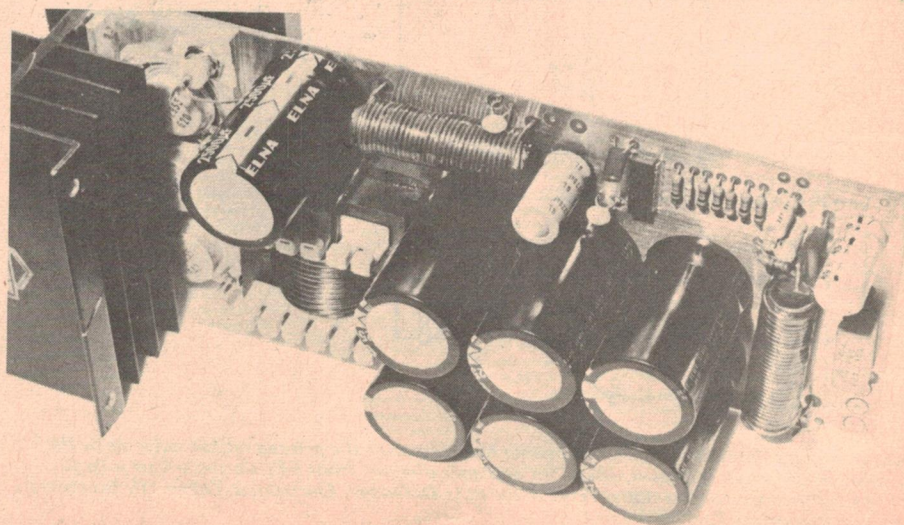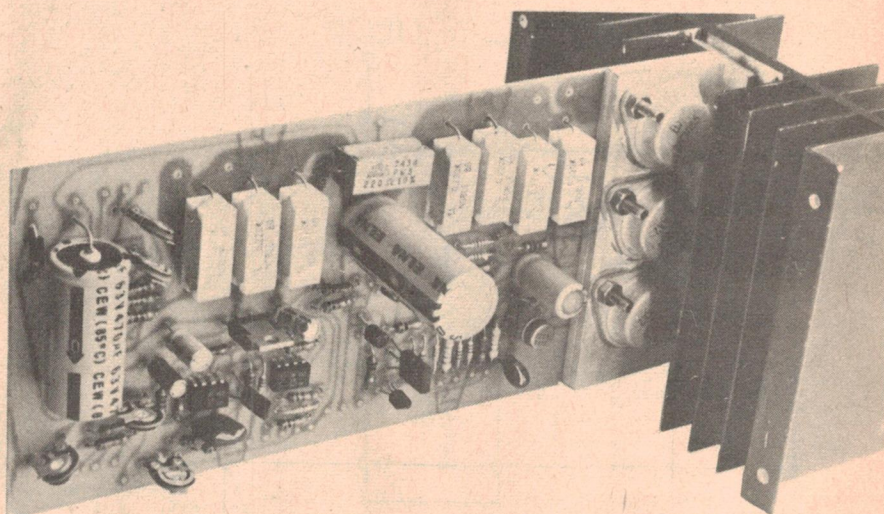

hookup wire about ½ meter long, baring one end and soldering them into the lower row of holes in the series regulator board. Add similar wires to the switching regulator board for the +40V and control input connections. To the output pads on this board, add about 200 mm of wire capable of handling 15A.

Mark the ends of all these wires with the letter on the overlay (a small square of paper held on with tape is easiest). The two boards can now be mounted onto the appropriate heatsinks using silicon grease on the contact area.

Before fitting the pc board to the chassis, mount the transformer, rectifier DB1, 3 core flex, front panel and front panel components. The pcb/heatsink assemblies can now also be added. On our prototype unit the transformer had lugs on the transformer but others will have leads. Note that the wiring that carries the power must be capable of carrying 15 amps or more.

The front panel can now be wired in accordance with fig. 3. Note that C30 is mounted directly across the output terminals on the front panel and similarly C1 is mounted on the power switch. Insulate the bare connections of the power switch with insulation tape to prevent accidental contact.

The thermistor should be soldered onto the appropriate leads (C and D), initially cutting the leads to about 5 – 6 mm long. It should then be epoxied onto the side of the coil in the power transformer. Use the 'slow dry' type of epoxy as this normally works better at elevated temperatures.

Testing and calibration

With a power supply as big as this one, initial power-up is always nerve-racking and sometimes dramatic. If one is available use a variac to bring up the voltage. If a variac is not available set both the voltage and current limit adjustments to about mid position and switch on.

The voltmeter should now read about 15 volts and it should be adjustable using the voltage control. Measure the voltage between the input and output of the series regulator — this should be about 6 volts. This checks the operation of the switching regulator.

Add a load to the unit to check the operation of the series regulator. If it is correct the meters can now be calibrated. For the low current range (1.5A) it is necessary to select R52 to calibrate the meter (the value is too low for a trim potentiometer).

To set the trim pot for the "warning" LED it is necessary to adjust the unit to 12V output and to load it to 10 amps. The potentiometer can now be adjusted until the led just lights.

HOW IT WORKS - ETI 142

Rectifier

The 240V AC is transformed to 32 V AC by T1 with DB1 rectifying it to give about 45V DC. On full load this voltage will fall to about 35 volts. For the purposes of this description we will refer to this as +40 volts (nominal value). The centre tap of the transformer is used to derive a centre tap DC voltage, reducing power dissipation in some of the electronics.

Switching pre-regulator

In this section, IC1 is used to generate a supply voltage 12 volts *below* the positive supply rail and this powers IC2. This IC has two functions: IC2a and IC2b form a triangular wave generator and IC2c and IC2d a comparator. The voltage on pins 8 and 10 of IC2 is the triangular waveform, varying from -3.6V to -6.3V (referred to the positive rail) with the rising part taking about 50 µs and the falling edge being about 4 µs. This gives a frequency slightly less than 20 kHz.

The comparators IC2c and d are connected in parallel simply to give additional drive capability. The output stage of the 339, for those unfamiliar with it, is simply an open-collector NPN transistor with the emitter joined to the negative supply rail. If the voltage on the control input is within 3.6V of the positive supply rail, the comparator output will be high and so Q1 will be off, Q2 on and Q3 & 4 on. Transistors Q3 and Q4 are in parallel to give additional drive and current sharing is helped by emitter resistance made up of about 60 mm of copper track on the pc board. These transistors should however be the same brand and selected to have similar base-emitter voltages.

If the control voltage is more than 6.3V from the supply rail the comparator output will be low, turning on Q1. This turns Q2, 3 and 4 off. The control voltage oscillates between -3.6V and -6.3V and so the transistors will be turned on and off at 20 kHz, the mark to space ratio being controlled by the control voltage. This effectively varies the output voltage.

The output of Q3, 4 is filtered by L2 and C15 to give a smooth DC voltage. A flyback diode, D2, is necessary and must be a fast recovery type to reduce power dissipation in the transistors. While the choke has an AC voltage across it the current is DC with an AC ripple. For this reason a substantial air gap is used to prevent the core saturating when the current rises to around 15 amps.

Series Regulator

The basis of the regulator is the familiar 723 monolithic regulator IC. The output of this IC is buffered by Q9-Q11 giving the required 15 ampere capability. Normally this IC cannot regulate to below 2V because of the limitations of the comparator. To get around this problem resistor R38 provides some bias current such that when the output voltage is zero the comparator input (pin 2) is above the

2V lower limit. Similarly the potentiometer which controls the output voltage varies not from zero, but from about 2 volts up to the reference voltage from the IC (pin 4) at 7.15 volts.

For those not familiar with the IC, it compares the voltage at pins 2 (inverting) and pin 3 (non-inverting) and adjusts the output on pin 6 to compensate. While this IC can vary the output voltage to within 3 volts of the positive supply rail, it does have a maximum supply of 40V. With this circuit, on no load the supply rises to about 45 volts, too high for the IC. To overcome this we have used a two transistor regulator (Q7, 8) using the reference voltage in the 723 IC to give about 35V on pin 8 of the 723. On full load the regulator ceases to operate as the ripple on the supply rail drops below the 35 volts required. An additional isolation diode and storage capacitor are used to maintain as high a voltage as possible.

Control of the preregulator is done by Q12 and Q13. The voltage from the preregulator and the actual regulated output voltage are both divided by three; if the differential voltage is greater than about 3.6 volts Q12 and Q13 will start to conduct. The collector of Q12 goes to the control input of the preregulator card to vary the voltage from the preregulator. The action of these transistors is to maintain about 5-6V differential between the desired output voltage and the preregulator output.

Current limiting is done by measuring the voltage across R35-37 using Q6. A second transistor Q5 is used to compensate for the 0.5-0.6 volt base-emitter voltage of Q6 and also to compensate for any temperature variations, in the base-emitter voltage.

If the current exceeds the preset value Q6 will start to conduct pulling current out of pin 9 of the 723 IC. This will reduce the output voltage to prevent the current rising above the preset limit.

Current measurement is done simply by measuring the voltage across R35-37. Three ranges are provided. Voltage measurement is done directly across the output terminals with two ranges provided.

The supply is capable of delivering high currents at high voltages for short periods; overload indication is provided by IC3 and IC4. The first of these, IC3, measures the amplitude of the ripple voltage on the main filter capacitors. This effectively gives an indication of the current being drawn from the transformer. When it exceeds a preset level, IC3 changes state, lighting up LED1.

The second indication is given by IC4 which measures the resistance at a thermistor glued onto the transformer. If the resistance drops below about 2.2k ohms the output of IC4 will go high, lighting LED2 and also shutting down the output by overriding the current limiting.

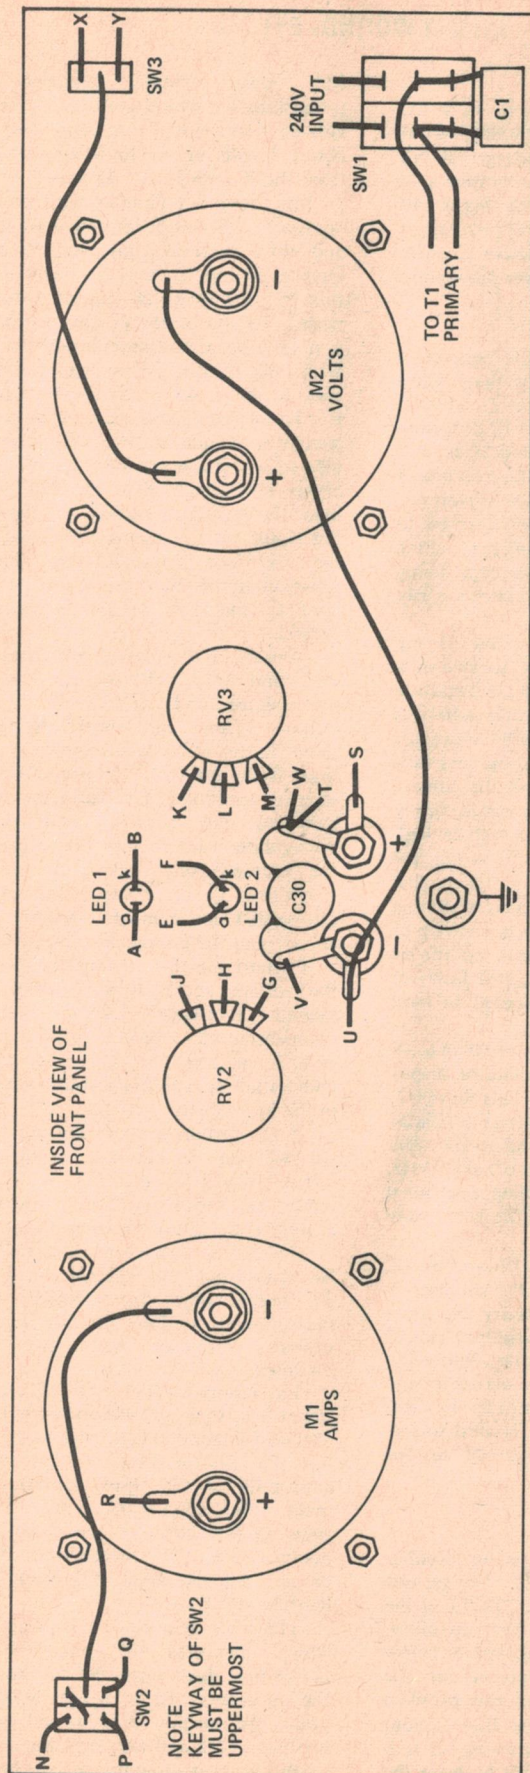


Fig. 3. The front panel wiring diagram.

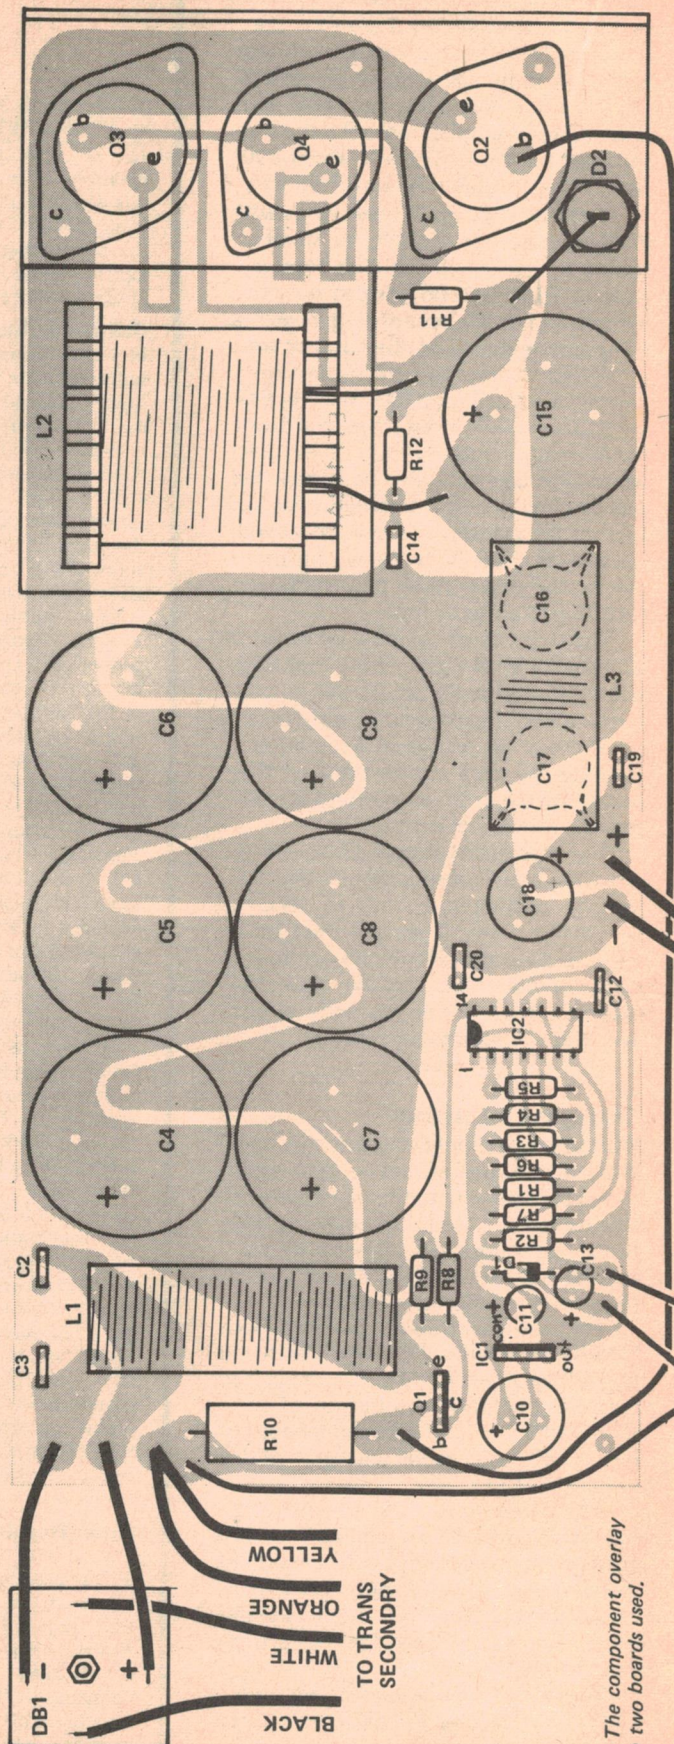


Fig. 4. The component overlay for the two boards used.

PARTS LIST - ETI 142

Resistors all 1/2W, 5% unless stated

R1	4k7
R2,3	10k
R4	47k
R5	1k
R6,7	10k
R8	1k
R9	220R
R10	220R, 5W
R11	10R
R12	220R
R13	1k
R14-R16	10k
R17	2k2
R18	47k
R19	470R
R20,21	4k7
R22	2k2
R23	47k
R24	1k
R25	10k
R26,27	1k
R28	4k7
R29,30	10k
R31	2k2
R32	47k
R33	6k8
R34	2k2
R35-R37	0.22Ω, 5W
R38	3k3
R39	10R
R40	220R, 5W
R41-R44	0.22Ω, 5W
R45	22k
R46,47	10k
R48	22k
R49	1k
R50	2k2
R51	8k2
R52	10R
R53	220R
R54	680R
R55	12k
R56	27k

Thermistor


TH1 Philips 2322 640 90004

Potentiometers

RV1	10k trim
RV2	500R lin rotary
RV3	10k lin rotary
RV4	100R trim
RV5	500R trim
RV6,7	5k trim

Capacitors

C1	33n 250Vac
C2,3	1n0 disc ceramics
C4-C9	2500μ 63V RP electro
C10	220μ 35V RB electro
C11	10μ 35V RB electro

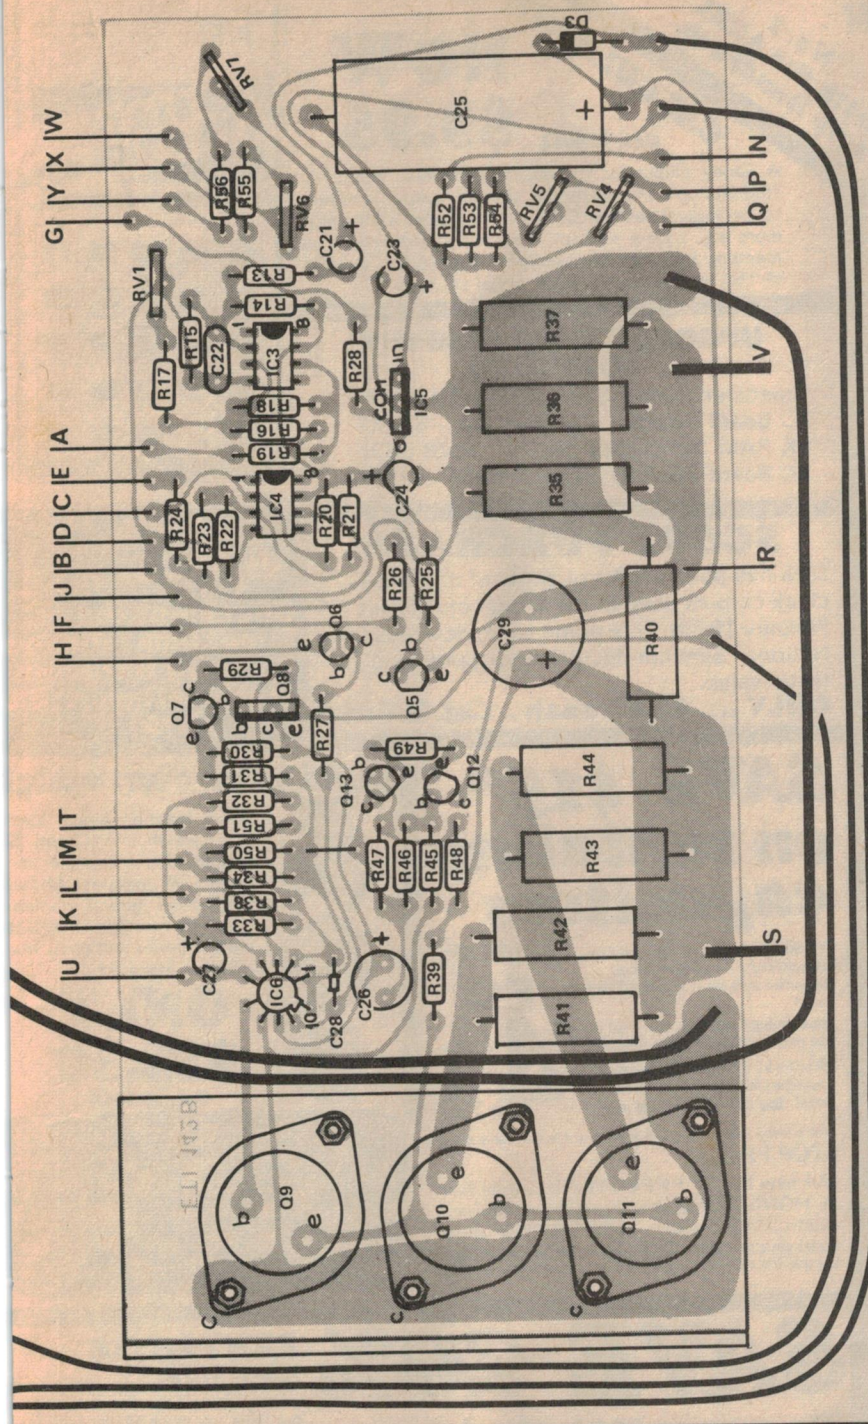

Semiconductors

IC1	7912
IC2	LM339
IC3,4	301A
IC5	7812
IC6	723C (metal pack)
Q1	BD140
Q2	MJ2955
Q3,4	2N3055
Q5,6	BC549
Q7	BC547
Q8	BD140
Q9-Q11	2N3055
Q12	BC547
Q13	BC559
C12	10n polyester
C13	10μ 35V RB electro
C14	10n polyester
C15	2500μ 63V RP electro
C16,17	100n disc ceramics
C18	220μ 50V RB electro
C19,20	1n0 disc ceramics
C21	2μ 63V RB electro
C22	100n polyester
C23,24	10μ 35V RB electro
C25	470μ 63V RT electro
C26	47μ 63V RB electro
C27	33μ 16V tantalum
C28	820p ceramic
C29	2200μ 35V RB electro
C30	100n disc ceramic

Inductors

L1	see table 1
L2	see table 1
L3	see table 1


DB1 MDA3502 or similar
LED1,2 Red LED with mounting

Miscellaneous

PCBs ETI 142A, ETI 142B
Transformer PF4244 (16+16V@300W)
Two 1mA TD86 meters scaled to fig.5
One 10A two pole power switch
One 7101 toggle switch (SPDT)
One 7211 toggle switch (SP3T)
Three terminals posts (red, black, green)
Two knobs
Two 45D4CB heatsinks
Two each, heatsink brackets
Metal box and cover
Front panel
3 core flex and plug
Cable clamp
Rubber feet etc.

D1	1N914
D2	1N3891R, BYX30-200R
D3	1N4004

ARRL AMATEUR RADIO HANDBOOK - NEW 1979 EDITION



Brand new and up to date 'bible' for the person interested in all aspects of Amateur Radio. The 1979 issue has been revised to bring it completely up to date. **IMPORTANT** - Dick Smith is the first retailer in Australia to be selling the prestigious 1979 ARRL Handbook.
Cat. B-2218 \$14.95

ONLY \$14.95

**No. 1
with the ARRL
1979 Handbook.**

**BARGAIN
NOW
\$9.95**
Cat. Q-3014

A handy calculator for business people, shoppers, students etc. An essential tool in today's modern technological society. Does all basic calculations plus more e.g. square root, pi, reciprocal, percentage and memory. Requires two penlight batteries Cat. S-3003 @ 15¢ ea. Has socket for external DC supply.

Takya
**WAS \$16.75
SAVE OVER 40%**

OMRON MINI PC MOUNT RELAY - DPDT

Miniature relay specifically designed for use on printed circuit boards. 12V DC/290 ohms coil. Precious metal contacts for optimum reliability and maximum life.
INCREDIBLE VALUE




ONLY \$3.50

Cat. S-7135

TOP PROJECTS FROM ETI - VOL. 5.

Brand new and fantastic as always - the Electronics Today International Book of Top Projects (Vol. 5). Contains constructional details of many interesting and useful projects, e.g. Graphic Equalizer, Shutter Speed Timer, Dual Power Supply etc. etc. Add this superb volume to your shelf and improve your knowledge of electronics.
Cat. B-3648 \$3.00



ONLY \$3.00

SCOOP PURCHASE

Dick has purchased a quantity of the MM5314 clock chip as used in the 6 digit clock (See EA Febuary 1979). This prime spec. device is from National Semiconductors and represents fantastic value.

ONLY ... \$5.90 each .. Cat. Z-6814

SPECIAL NOTICE.

**Check out the
Super Dick Inflation
Fighting Bargains
in special insert (EA
Feb. 1979).**

**SAVE \$15²⁵
on tantalum
capacitors**

You know how useful Tag Tantalum capacitors are - and usually how expensive they are - around 40 cents each!

So how much would a pack of 50 of the most used values cost? \$20.00?

Here are 50 PRIME SPEC tantalum capacitors at less than 1/4 normal price! Buy now (in bulk) and save!

**Pack of
50
\$4⁷⁵**
Cat
R-7060

STOP PRESS!

Our new DUTY FREE STORE will be open in HONG KONG shortly. A new deal for Australian travellers: HONG KONG (duty free) prices with AUSTRALIAN guarantees!

Build your own watch!



A full function digital electronic watch in KIT form. So simple to put together in couple of minutes. Shows day, date, hours, minutes, seconds. Comes complete with batteries and strap. Instructions included.

**ONLY
\$12.50**
Cat. K-3455

NOTE: Prices and stock availability could change between publication deadline and on-sale date due to circumstances beyond our control. Please check with our stores for latest availability and prices.

WHAT'S NEW?

SMOKE DETECTOR

Protect your own life and others with this brand new smoke detector. Fire can happen at any time and any where - be ready. Our detector has dual chambers for high sensitivity and reliability. A LED flashes every 40 seconds to indicate power on and the 9V alkaline battery (supplied) lasts for over a year. The alarm horn delivers an ear shattering 85 dbA for warning of smoke. Remember that a smoke detector is far more effective than a heat detector. Easy installation with two screws.

Cat. L-5258 \$35.00.



**FANTASTIC
VALUE
\$35.00**

NEW RESISTOR PACK

FANTASTIC BARGAIN

Guaranteed over 200 resistors, all preferred values within range 1 ohm - 10 Megs, 1/4 watt - all brand new and fully guaranteed.


At our one off price would cost you over \$8.00.

NOW ONLY \$3.00 Cat. R-7015
THATS LESS THAN 1.5c EACH!
LIMITED QUANTITY - HURRY!

**SAVE 20% FANTASTIC
SAVING...**

**Famous 'Weller' cord-
less soldering iron**

Yes! This top name Weller cordless iron is now reduced - we've rationalised the packaging and now supply only the bits you really need - so you save. In-built re-chargeable cells give hours of soldering away from a power source. A built-in light shows the way in dark corners. Mains charger and one spare tip included.

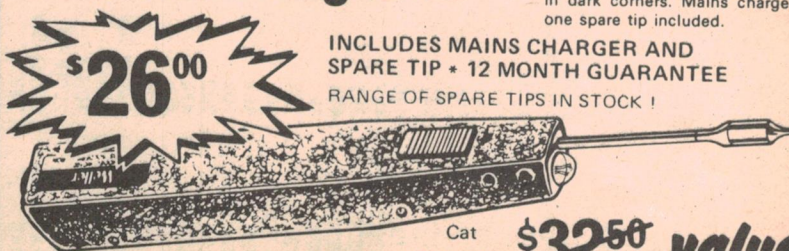

**INCLUDES MAINS CHARGER AND
SPARE TIP + 12 MONTH GUARANTEE
RANGE OF SPARE TIPS IN STOCK !**

\$26⁰⁰

Cat
T-1050

\$32⁵⁰ value!

INCREDIBLE SCOOP PURCHASE

(For Mail Order Customers Only)

A MUST for all Electronic Enthusiasts
TOP QUALITY UNIVERSAL TERMINALS




BOTH AVAILABLE IN RED & BLACK

WE HAVE PURCHASED THE COMPLETE STOCK FROM **PLESSEY** EXCLUSIVELY FOR OUR MAIL ORDER CUSTOMERS - SO HURRY AS STOCKS WON'T LAST AT THESE PRICES!
ADD THEM TO YOUR NEXT MAIL ORDER!

Paper Tape Reader Kit

Communicate with your computer! Easy to build with complete interface instructions - will interface with all microprocessors via an 8 bit parallel port. This kit has no moving parts.

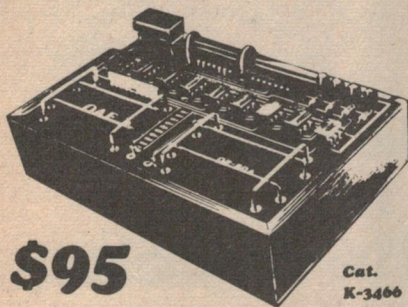

\$95

Cat. K-3466

WATCH THIS SPACE

AND FIND OUT WHAT YOU MISSED

Each month all of our stores feature an outstanding special which is actually **BELOW COST!** N.B. Specials are strictly while stock lasts. Don't miss out!

LAST MONTH:

HOW TO HEAR/SPEAK CB IN SHORT SHORT FOR ONLY \$1.69 - NORMALLY \$3.00.

SAVING \$1.31

WHAT'S THIS MONTH'S SPECIAL?
CALL IN AND FIND OUT FOR YOURSELF!

PARTS FOR MAGAZINE PROJECTS

6 DIGIT CLOCK KIT (See Feb. EA)	
Complete kit, including instructions.	Cat K-3495 \$19.75
Case to suit with mounting bracket & bezel	Cat H-3194 \$3.60
AC Mains Adaptor	Cat M-9514 \$5.25
PLAYMASTER AM/FM TUNER (See Nov/Dec EA)	
Complete kit, including instructions	Cat K-3494 \$159.50
SEPARATE PARTS:	
Pre-wired and aligned tuner module	Cat F-4610 \$59.00
Set of 4 PC boards	Cat H-8357 \$9.75
Signal strength meter	Cat Q-2100 \$4.95
Tuning meter - centre zero	Cat Q-2095 \$4.95
Most other electronic parts for this project in stock.	
MODEL TRAIN CONTROLLER (See Oct EA)	
Not produced as a kit - all parts available from stock:	
PCB only	Cat H-8355 \$3.75
Zippy box	Cat H-2752 \$3.75
2N3055 transistor	Cat Z-2145 \$0.95
2N3053 transistor	Cat Z-2130 \$0.80
FET INPUT AC-DC VOLTMETER (See Sept EA)	
Not produced as a kit - all parts available from stock:	
PC board only	Cat H-8353 \$2.75
1mA MRA-65B panel meter	Cat Q-2060 \$12.50
Fabricate your own meter scale using the Scotchcal process:	
8005 black Scotchcal photo-sensitive aluminium	Cat H-5694 \$6.00
CA-3140 FET op-amp	Cat Z-5417 \$2.50
VARI WIPER Mk 2 (See Sept EA)	
Not produced as a kit - most parts available from stock:	
Relay	Cat S-7125 \$4.80
C106Y1 SCR	Cat Z-4315 \$1.00
2N2646 (DS2646) unijunction	Cat Z-1786 \$1.20

UPGRADED 40/200MHZ FREQ. COUNTER (See Aug EA)
Same style as previous kit, but new circuitry means it is easier to build, set up and is more sensitive. Basic counter is 40MHZ - by adding a single 95H90 IC the range is extended to 200MHZ.

Complete kit for 40MHZ, inc. instructions	Cat K-3437 \$99.50
95H90 IC to extend range to 200MHZ	Cat Z-5360 \$12.50
SEPARATE PARTS:	
PC boards (set of two high quality boards)	Cat H-8346 \$8.50
MC-1016L IC (triple differential amplifier)	Cat Z-5415 \$1.95
MM-5369M IC (oscillator - divider)	Cat Z-5781 \$2.50
74C926 IC (4 digit counter)	Cat Z-5414 \$6.50
3.579545MHz crystal (new low price)	Cat K-6031 \$3.00
LT-303 7 segment display	Cat Z-4103 \$1.50
All other components are normal stock lines at all of our stores.	

PHOTO TACHOMETER (See Aug EA)
Although we do not produce a full kit for this project, all parts are normal stock lines at all of our stores.

PCB (only)	Cat H-8352 \$1.80
FPT 100 phototransistor	Cat Z-1950 \$2.00

NEW 10 GAME TV GAME KIT (See July EA)	
Complete kit, including instructions	Cat K-3491 \$49.50
SEPARATE PARTS:	
PCB (only)	Cat H-8344 \$3.95
Fully built RF modulator	Cat K-6040 \$3.00
Fully built audio modulator	Cat K-6042 \$4.50
AY-3-8600 IC	Cat Z-6852 \$15.00

Many other PC boards for current magazine projects in stock.

DICK SMITH ELECTRONICS



SYDNEY 125 York Street, SYDNEY. Ph. 290-3377
147 Hume Hwy, CHULLORA. Ph. 642-8922
162 Pacific Hwy, GORE HILL. Ph. 439-5311
30 Grose Street, PARRAMATTA. Ph. 683-1133

MELBOURNE 399 Lonsdale Street, MELBOURNE. Ph. 67-9834
656 Bridge Road, RICHMOND. Ph. 42-1614
BRISBANE 166 Logan Road, BURANDA. Ph. 391-6233
ADELAIDE 203 Wright Street, ADELAIDE. Ph. 212-1962

MAIL ORDERS P.O. Box 747, Crows Nest, N.S.W. 2065. Post and packing extra.

Dealers across Australia.

MAJOR DICK SMITH DEALERS: Listed below are the names and addresses of dealers who stock a large range of our products - however we cannot guarantee that the dealers listed will have all items in stock and at the prices advertised.

Brian Bambach Electronics
Sound Components
Elektron 2000
GM Electronics
Trilogy Elec. Supplies
Crystal TV Rentals Pty Ltd
Lismore Kitronics
Langman's Sound Centre
Sumner Electronics
68 William St, Gosford NSW. Ph 24 7246
78 Brisbane St Tamworth NSW Ph 66 1363
44 Brown Road, Newcastle NSW Ph 691 222
99 Fitzmaurice St, Wagga NSW. Ph 21 3044
40 Princes Hwy Fairy Meadow NSW Ph 83 1219
66 Crystal St, Broken Hill NSW. Ph 6897
Magellan St & Bruxner Hwy Lismore NSW Ph 878 361
Shop 15, Treasure Island, Coffs Harbour Jetty NSW Ph 521 570
95 Mitchell Street, Bendigo VIC. Ph 43 1977

Citcom Electronics
ADS Electronics
Advanced Electronics
Aero Electronics
Hutchesson's Comm. Centre
Gawler CB Centre
Altronics
Hocks TV Rentals

Hopkin's Arcade, West St, Mt Isa QLD. Ph 434-791
312 Oxley Ave, Margate QLD. Ph 204-1276
5a The Quadrant, Launceston TAS. Ph 31-7075
123a Bathurst St, Hobart TAS. Ph 34-8232
5 Elizabeth St, Mt Gambier SA. Ph 256-404
51 Hillier Road, Evanston SA. Ph 222-149
105 Stirling St, Perth WA. Ph 328-1599
87 Hannan St, Kalgoorlie WA. Ph 211-906

SHOPS OPEN 9AM to 5:30PM
(Saturday 9AM - 12 noon)
BRISBANE 1 2 Hour earlier

ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY

Many lines available from the
Dick Smith Electronics Centres at


GRACE BROS

Broadway - Bondi - Chatswood - Liverpool
Miranda - Mt Druitt - Parramatta - Roselands
and Warringah Mall



R

GENERAL INSTRUMENT

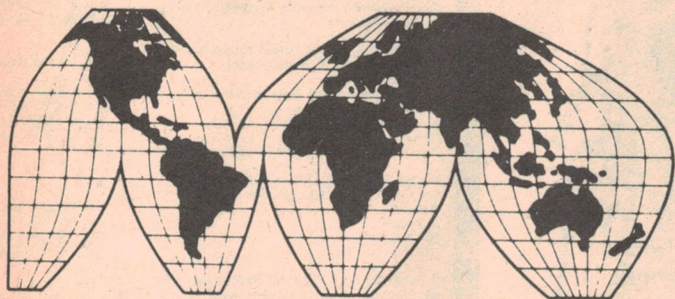

MICROELECTRONICS

NOW AVAILABLE EX STOCK

AY-1-0212	Top octave generator 250KHz to 1.5MHz	\$13.00
AY-1-0212A	Top octave generator 250KHz to 2.5MHz	\$13.00
AY-1-1320	Piano keyboard circuit	\$12.20
AY-1-5050	7-stage frequency divider	\$4.10
AY-1-5051	4-stage frequency divider	\$2.90
AY-1-6721/6	6-stage frequency divider	\$3.70
AY-3-1014A	Uart single supply between +5V to +14V	\$9.30
AY-3-3550	4 1/2 digit multi meter/counter	\$20.45
AY-3-9400	Dual tone multi frequency generator	\$6.25
AY-5-1013	Uart 30K baud	\$7.35
AY-5-1013A	Uart 40K baud	\$8.45
AY-5-2376	ASCII keyboard encoder	\$19.00
AY-5-3507	3 1/2 digit DVM	\$8.00
AY-5-3600 PRO	Binary keyboard encoder	\$25.35
AY-5-4007	4-digit display driver	\$12.50
AY-5-9100	Push-button telephone dialler	\$12.00
AY-5-9200	Repertory telephone dialler	\$15.80
AY-5-9500	CMOS clock generator	\$2.50
ER 3400	Electrically erasable ROM	\$42.00
RO-3-2513	Character generator	\$12.00
Complete piano kit (18 IC's plus application notes)		\$68.50
1978	Data catalogue	\$5.00
1978	Applications handbook	\$5.00

*All prices plus sales tax.
Data included with each purchase*



GENERAL ELECTRONIC SERVICES PTY. LTD.
99 Alexander Street, Crows Nest, NSW. 2065.
Phone: 439-2488, 439-2399. Cables: SERVO SYDNEY.
Telex: 25486 A/B SERVO.



Adelaide: 42-6655
Brisbane: 277-4311

Melbourne: 598-9207
Newcastle: 69-1625

Perth: 325-5722



Weller



Weller

The Tools. from Cooper The Toolmaker.

The Weller WTCPN soldering station is temperature controlled and combines high volume capability with precision performance. The low-voltage TC201 soldering pencil employs the exclusive 'closed' loop method to control maximum temperature and protect the sensitive components.

The Weller W60D temperature controlled iron is a lower cost, portable, general purpose iron to suit all requirements - including transistors or printed circuit work and electrical connections.



Lufkin

Official Supplier of
Measuring Tapes
to the 1980 Olympic
Games in Moscow

The Cooper Tool Group Limited
P.O. Box 366, Newington Street
Albury NSW 2640, Australia
Tel: 2502111 Telex: 50995

The Cooper Group

CRESCENT-LUFKIN-NICHOLSON-WELLER-WISS-IDEALITE



16K S-100 RAM Card

This is a project we feel we can be justly proud of — a fully S-100 compatible 16K RAM card with some very impressive facilities which will make it a flexible addition to any S-100 system.

MOST OF ETI'S microprocessor-related projects are compatible with the S100 bus. Eventually we shall have a complete line of S100 cards so that readers may build up complete and powerful systems without having to scrap 'simpler' designs.

The majority of these projects are designed and developed by our own laboratory. We usually do it this way as we then have total control over design features and complexity and of course component choice. We like to think this is one of the major reasons why ETI projects are so popular.


On this occasion we've gone about it slightly differently: we'd had a 16K RAM under way for some months when we heard that Mike Pratt of S M Electronics was also working on almost identical lines. It seemed pointless to 're-invent the wheel' so we examined the feasibility of running Mike's design as an ETI project. Regular readers will be aware of a previously published design from Mike - his overwhelmingly popular ETI 318 digital tachometer.

Here then is the result - we believe it's a beauty!

Projects of this complexity involve massive investments in time, effort and money; it seems only fair that Mike receives some return for his work. So Mike is retaining the commercial rights to the printed circuit board. Individual readers who wish to make their own are perfectly free to do so however and may obtain the patterns free of charge (see below). Ready made boards and all components may be obtained directly from S M Electronics, 10 Stafford Court, Doncaster East, Vic, tel: (03) 842.3950.

Description

The board carries up to 32 1K x 4 RAM

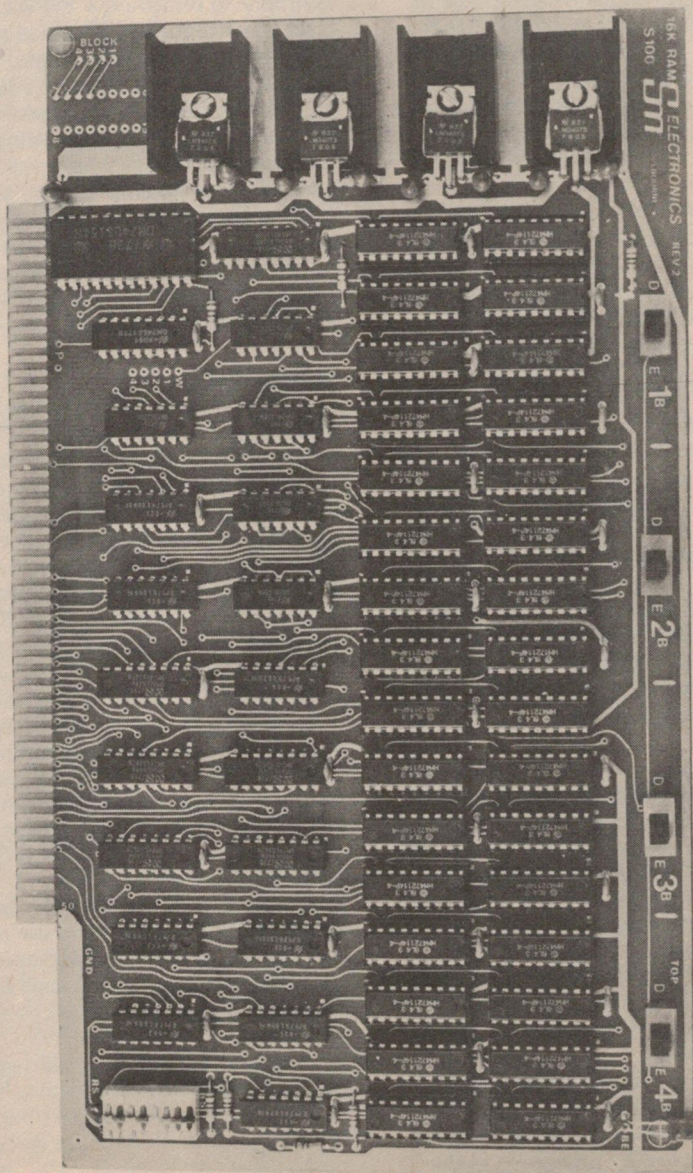

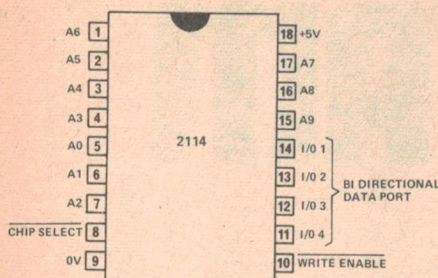


Fig.1. The pinouts for the RAM chips. These can either be slow or fast, tested or untested devices (see text) - they're all pin compatible.

chips. The ones supplied in the SM Electronics kit are Hitachi devices — HM472114P-4. These have an access time of 450 ns (typically). It is also possible to use the HM472114P-3 which is more expensive but has a 300 ns access time. Another alternative is the pin-compatible Intel 2114 device which is cheaper but has the disadvantage of not having been 'burnt in' (i.e. run for a time) and then tested completely, as the Hitachi device has.

All of the above devices require only a single 5 volt supply and the board derives this from the 8 volt preregulated line of the S-100 bus.

The RAM is split into four 4K blocks, each of which can be placed anywhere in the 64K memory space of the system. This is done by connecting each of four points on the board (one for each 4K block) to one of sixteen possible points which correspond to the possible positions in the 64K. If the board is not fully populated (i.e. if you couldn't afford all of the RAM at the one time and left one or more 4K blocks of sockets empty) then connecting one or more of the four 'block select' lines to +5V via a pull-up resistor will take care of that too.

The board also carries four 'write protect' switches which allow the user to create what is effectively ROM by preventing the system from writing to a particular block or blocks.

Wait States

For some systems the memory is slower than the processor that when a read or write occurs, the processor must be told to wait while the memory works. On some earlier systems this time delay was achieved by using a monostable — this entailed 'tweaking' the monostable period until the system worked! Instead, this board counts a selected number of clock cycles (up to 4), giving a fixed and predictable delay.

The card also carries hardware to implement the Cromemco 'bank select' system of memory management. Basically, this allows eight blocks up to 64 Kbytes in size to be enabled or disabled

by setting the appropriate bit of output port 100Q (40H). A DIP switch on the lower right corner of the board enables the user to specify which bit of the control word the card will respond to. This scheme allows a processor with a sixteen-bit address bus to access up to 512 Kbytes with fairly simple software.

The card can be set to be either enabled or disabled on system reset, before the memory management software has set up the normal memory allocation. In most systems, one card will be enabled on reset and all others will be disabled to avoid bus contentions.

Phantom Line (Pin 67)

In some situations, users may want to locate a ROM containing say a monitor program at an address which conflicts with the RAM card. One way to do this is simply to remove the RAM card, or at least those chips which would conflict, but a better solution is offered with this card. If ROM must share an address with RAM, then the user should arrange for the ROM's address decoding logic to pull the PHANTOM line of the S100 bus low. This signal is applied to the address decoding logic of the RAM card and disables it if another device has priority. In this way the ROM can be made to 'occlude' part of the RAM. A link on the board selects this facility.

Construction

A complete kit of parts for this project is available from its designer, Mike Pratt of S.M. Electronics, and we recommend its use for ease of construction and reliability. (Also its excellent price on special offer!) Alternatively, the experienced constructor who wants to save a few bucks can make up his own double-sided pcb, but as this will not be through-hole plated, the constructor will have to identify all points where a track goes through the board and insert a link, unless there is a component lead at that point. We do not recommend this for the faint of heart (seriously). However, printed circuit patterns will be available, on receipt of a large stamped self-addressed envelope from ETI642 Patterns, Electronics Today, 15 Boundary Street, Rushcutters Bay, NSW.

Remember also that the use of a non-through-hole-plated pcb prevents the use of IC sockets, and especially beware of feedthroughs which must go under ICs, sockets or the DIP switch.

Construction should be fairly straightforward — the only choice that has to be made right at the start is how many IC sockets to use. There are three possibilities: none at all — this means that a dead IC has to be removed by

de-soldering; RAM only — to enable 'swap testing' of these expensive devices and also easy replacement should they prove defective; all ICs socketed — IC sockets tend to be rather expensive and putting sockets on all ICs may not be cost-effective.

All the ICs fit in with pin 1 in the top left hand corner, so there shouldn't be any problem getting them the right way round. The only orientation-sensitive components are the LED (the flat on the side of the package goes to the right) and the tantalum capacitors.

Any IC sockets should be soldered in first, followed by the resistors and capacitors. The switches should be fitted next, followed by the regulators and heatsinks. At this point, power should be applied to the board and the outputs of the regulators measured — if they are anything other than +5 V, you've got a problem, and should check the power supply circuitry before inserting the ICs.

If everything checks out, the ICs should now be inserted and the options strapped. The board is now complete and ready for use.

Fig.3. The overlay for the double-sided board used in the RAM card. Due to the size and complexity of the design, we have not published the foil patterns. These will however be available from us (see text).

PARTS LIST - ETI 642

Resistors

all ½W, 5%
R1, 2 2k2
R3 1k
R4-R6 2k2
R7 1k

Capacitors

C1-C8 10µ 25V tantalum
C9-C36 10n ceramic


Semiconductors

IC1-IC32 2114 (see text)
IC33 74LS138
IC34-IC37 74LS32
IC38 74LS20
IC39, 40 74LS367
IC41 74LS10
IC42 74LS04
IC43 74LS74
IC44 74LS154
IC45 74LS175
IC46 74LS30
IC47, 48 74LS04
IC49-IC51 74LS367
IC52, 53 74LS05
IC54-IC57 LM340T5

LED 1 Red LED


Miscellaneous

pcb ETI 642
Four single-pole two-way slide switches
One eight-pole one-way DIL switch
Four heatsinks to suit regulators

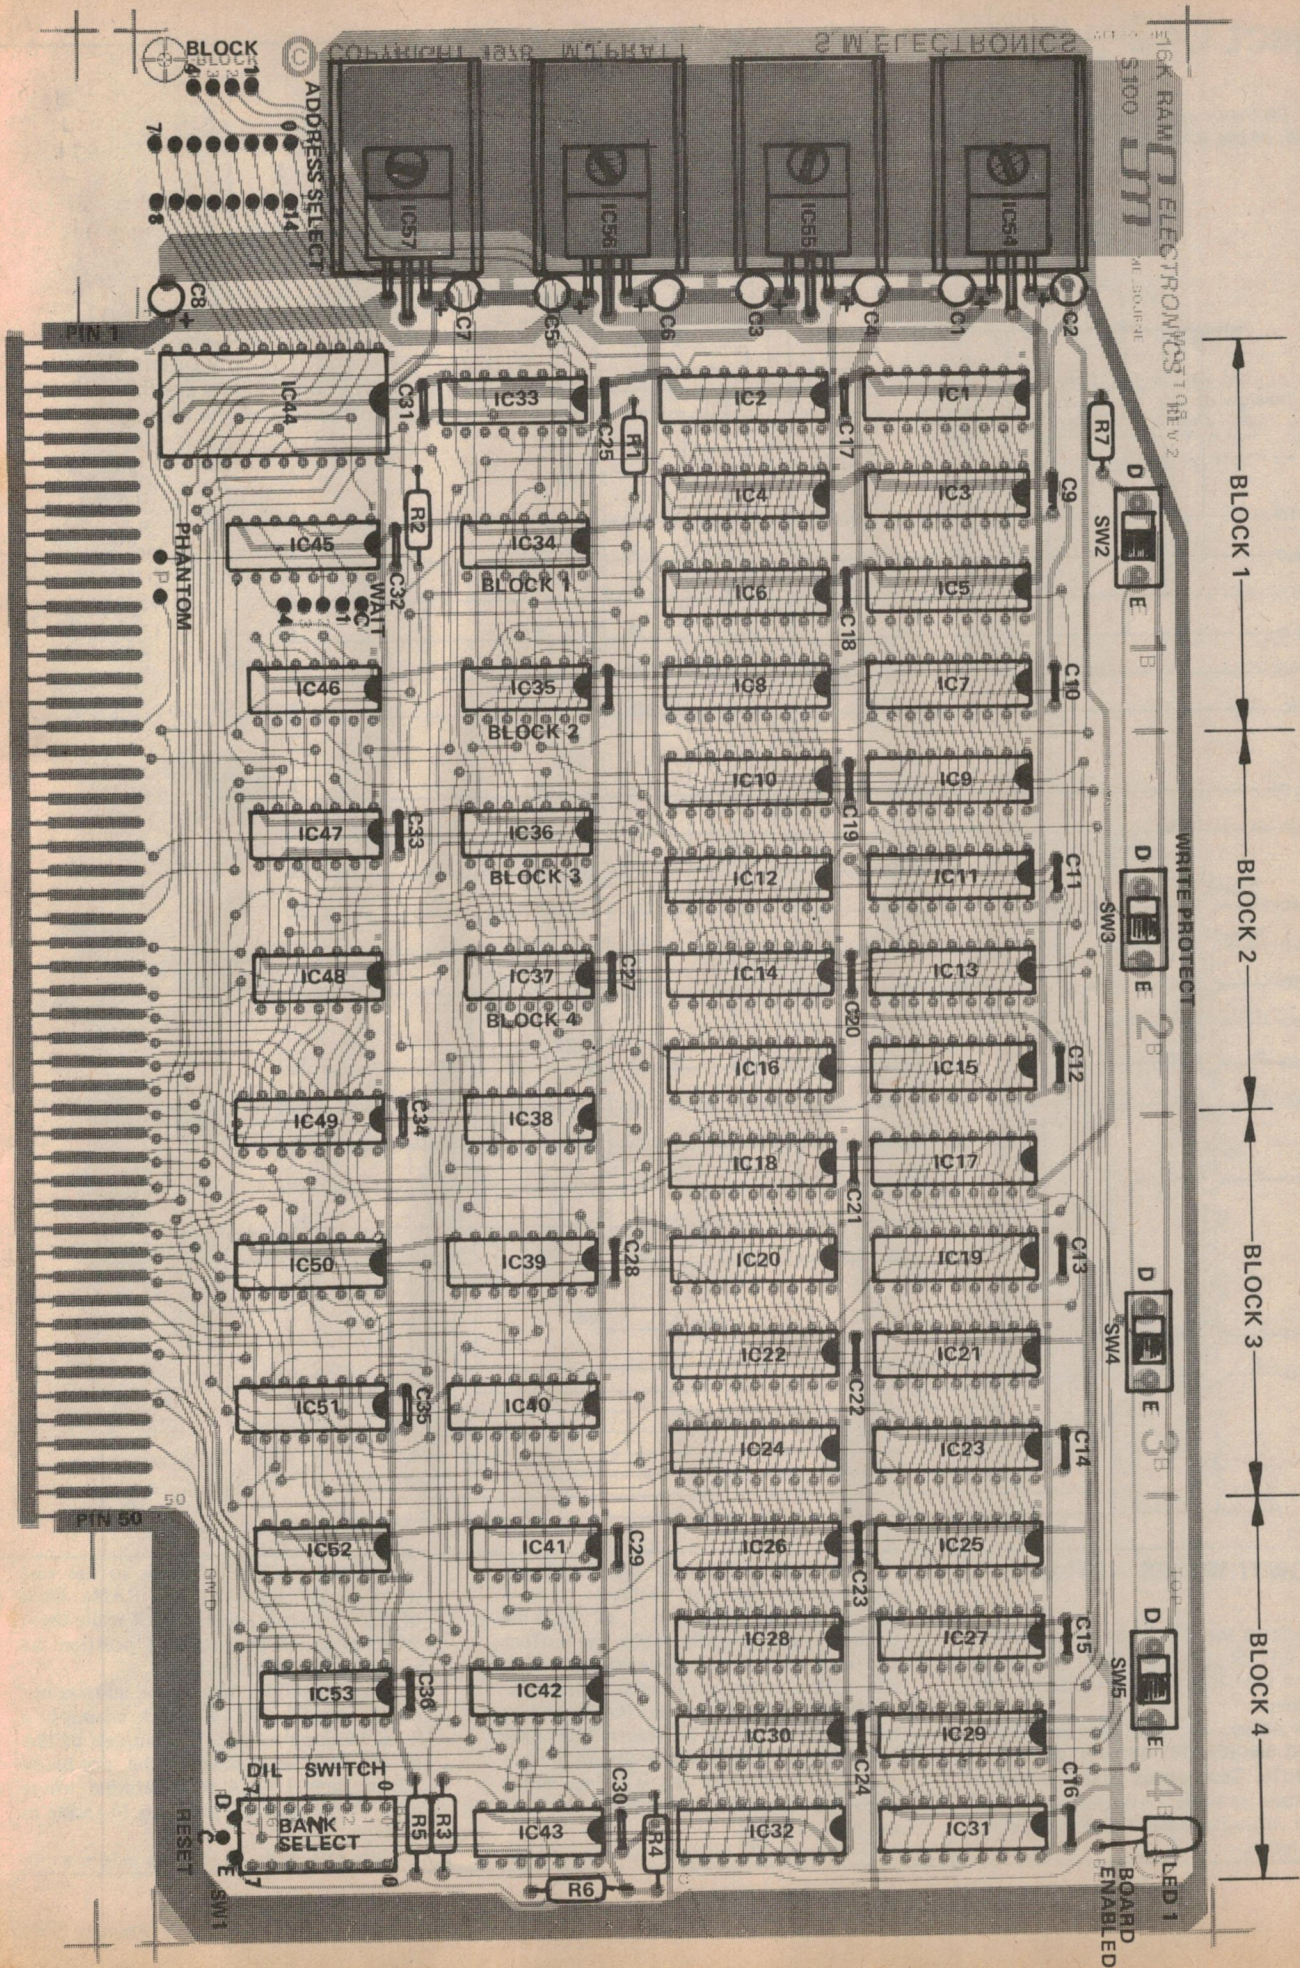

Project 642

Fig.2. (this and opposite page) The circuit diagram of the RAM card.

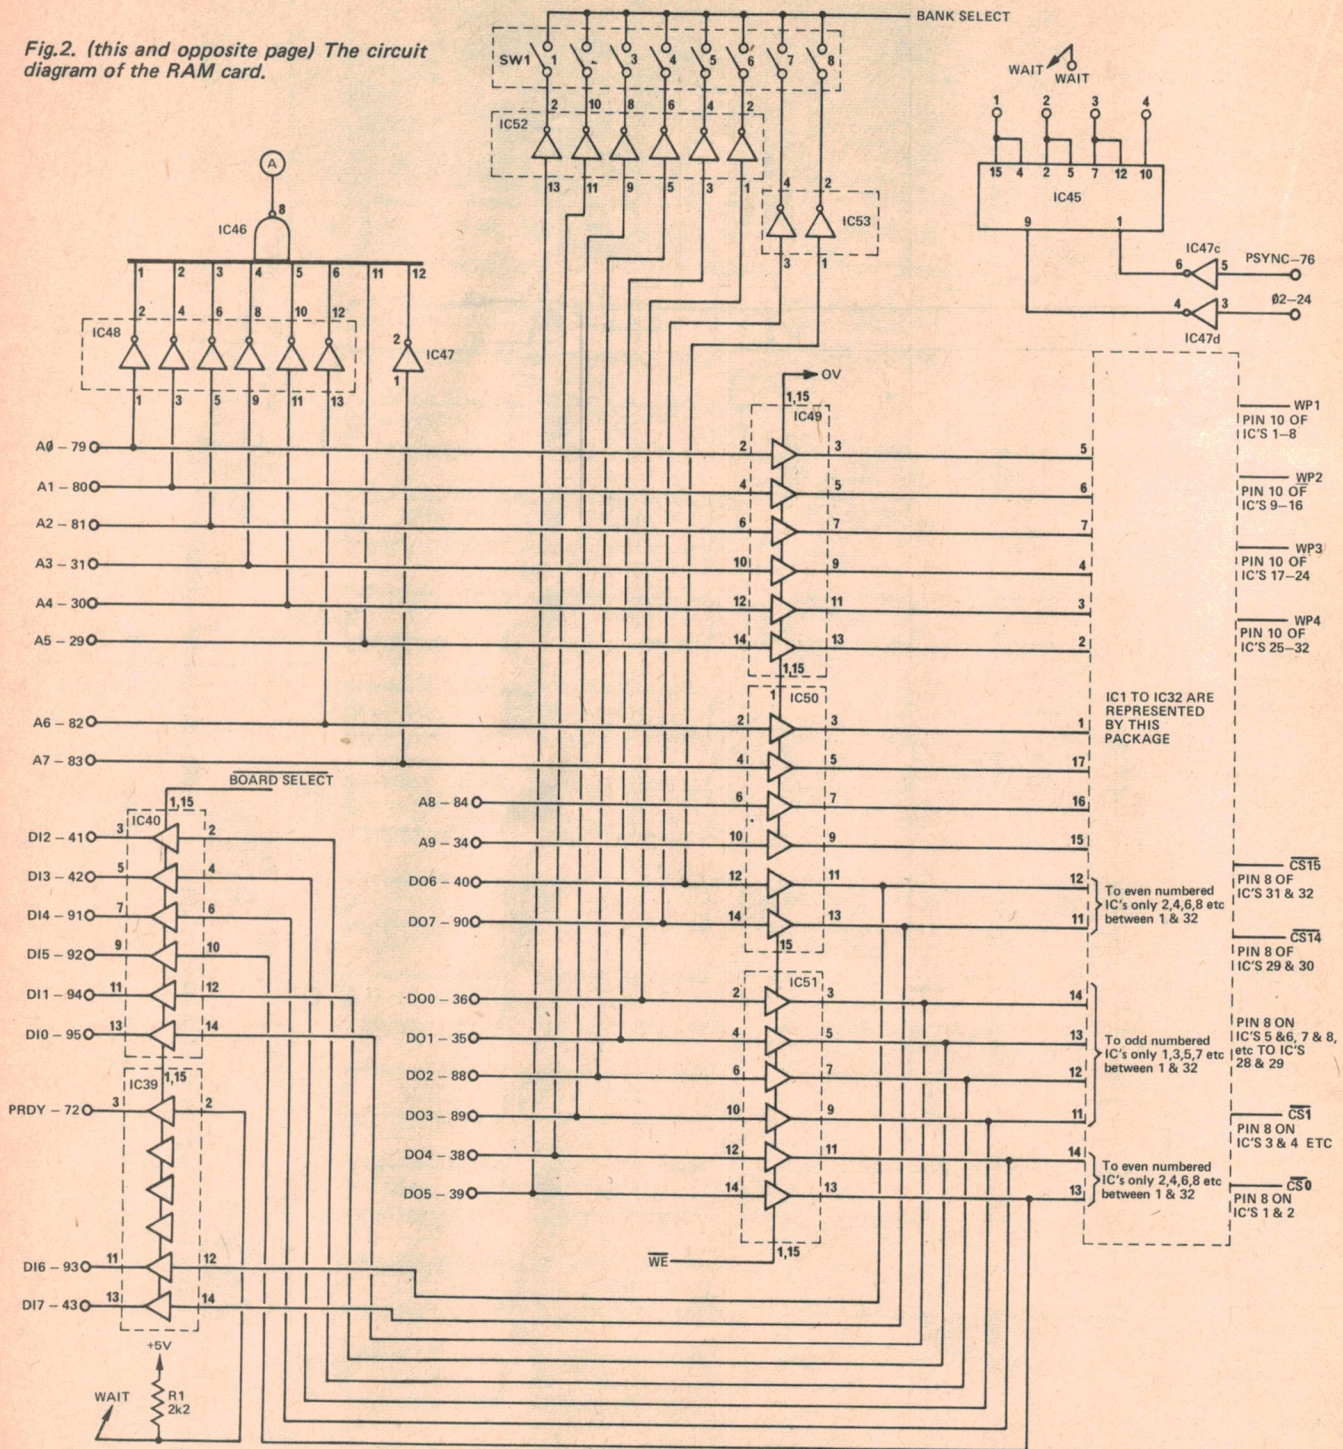

HOW IT WORKS - ETI 642

An article on the S-100 bus system appeared in ETI September 1977. We suggest that you read it if you are unfamiliar with the system.

The address and data lines are tri-state buffered by ICs 39, 40, 49, 50 and 51 (74LS367). This means that the buffers have three possible output states - '1', '0' and high impedance (effectively disconnected).


The address lines to the RAMs are always active (i.e. not tri-state) - pins 1 and 15 of IC49 and pin 1 of IC50 are earthed to permanently enable the buffers. The data in (to the processor) and data out (of the processor) lines are connected to the same points on the RAMs and so the data out (of the processor) lines have to be tri-stated while the processor is reading. This is done by the WE line, which feeds the tri-state control input of IC51 and part of IC50.

This same WE signal is also fed via the

four 'write protect' switches to the 'not write enable' inputs of the RAMs. Each of these controls one 4K block while these switches are in the 'disabled' position the ram contents will not change.

The high-order bits of the address bus are decoded by IC44, which is simply a 4 to 16 line decoder. The outputs of this IC are then wire-linked to the 'not block select' lines 1 to 4 to determine where each of the four 4K blocks is to reside in memory.

Bits 10 and 11 of the address are

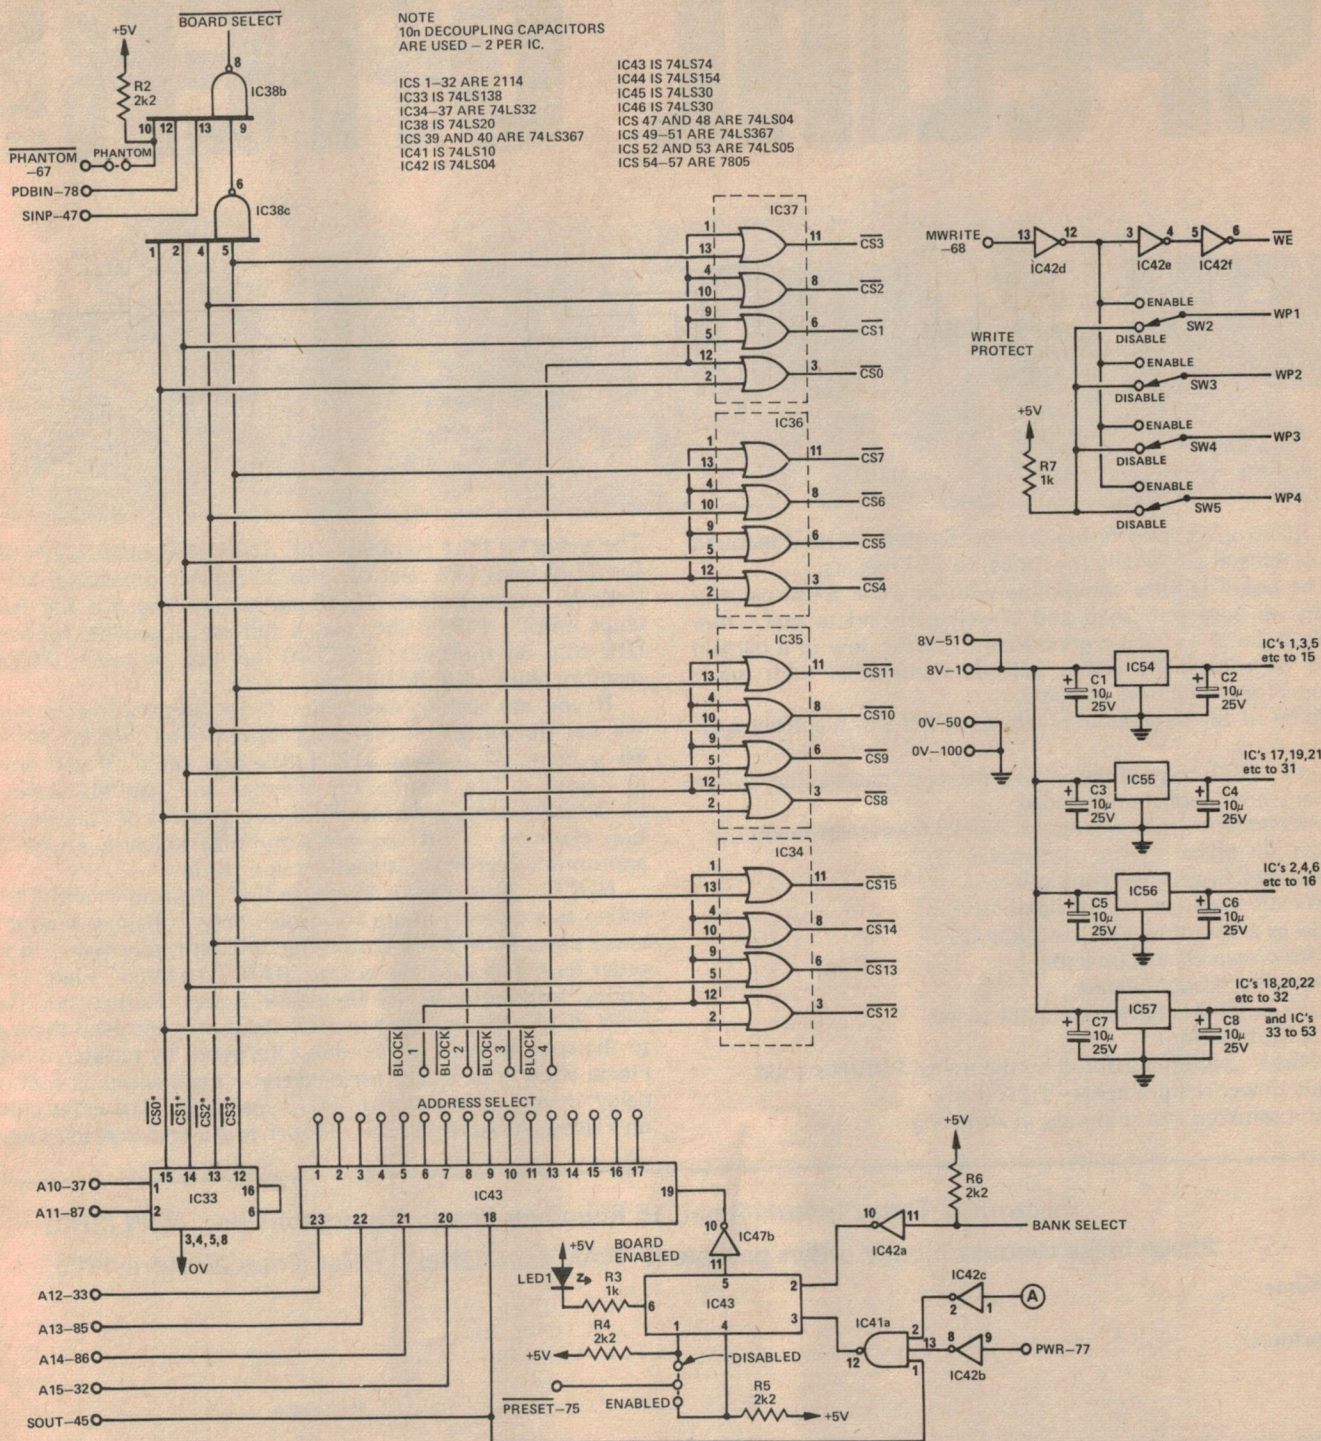

decoded by IC33, a 2 to 4 line decoder which determines which pair of chips is being accessed out of the 4K block (a pair of chips constitutes 1K of RAM). This is combined with the 'block select' signals in ICs 34 to 37 to form the 'chip select' lines 1 to 16 which go to the RAM chips.

IC45 simply counts clock cycles (the S100 Ø2 signal) until the wait period is over. The number of cycles is determined by a wire link to one of the outputs of the IC and the counter is reset by the S100 PSYNC signal. A pull-up resistor selects 0

wait states if no link is present.

The cromemco 'bank select' hardware toggles flip-flop IC43. One output from this enables the outputs of IC44 while another drives the 'board enabled' LED.

An attempt to output to the 'bank select' port at 100 octal (hex 40) is detected by the address decoder, ICs 46 and 48 and part of 47. Detection of the right address, PWR and SOUT signals causes IC43 to accept any signal which makes it through SW1, the bank select switch. This is fed from the data bus and effectively selects

which of the eight possible 64K blocks the board will 'appear' in.

The PRESET line of the bus is connected via a wire link to IC43 and the position of the link determines whether the board is enabled or disabled on processor reset.

Lastly, the PHANTOM facility can be used by completing the link from line 67 of the bus to pin 10 of IC38. This will disable the board if the PHANTOM line is pulled low.

SPECIAL OFFER!

16K S-100 RAM Card

S M Electronics are offering the 16K S100 RAM card featured in this issue at a specially low price, to ETI readers.

The board is fully compatible with all other S100 projects which we have published and is well matched to our future S100 material - so it's a good idea to invest now in a bargain piece of equipment which will be compatible with many systems for a long time to come.

Some of the outstanding features of the S M Electronics kit are:

Fully S100 compatible — not 'pretend' compatible, as are many commercial units today

Independently addressable 4K blocks for system flexibility

Each 4K block is write-protectable

Standard Cromemco bank select

Selectable wait states for flexibility

450 ns access time (300 ns optional)

Gold plated edge connector

All holes through-plated

Fully buffered address and data busses

Phantom option

Reliable operation assured by the use of PDBIN strobe

Low power requirements - 1.2A (typ)

Kit assembled and sold only in Australia

The entire kit for a complete 16K S100 RAM board is available for \$299 (plus 15% sales tax plus \$5 registered postage). Other optional extras include 32 18-pin sockets (i.e. for the RAM chips only) - \$13.80 inc. tax, a full set of sockets for every DIL chip on the board - \$23.00 inc. tax, or faster (300 ns) memory chips - \$36.80 inc. tax.

If you are seeking exemption from sales tax, please insert the tax free prices on the order form (RAM Card kit \$299 + \$5 p & p, 32 sockets \$12, full socket set \$20) and either a) enter a Tax Exemption Number and sign the order or b) attach a company order form giving details of your exemption claim or c) if you are a full-time student, attach the appropriate certificate, signed by your tutor.

NOTE: This offer is made by S M Electronics and ETI is acting as a clearing house for orders only. Cheques should be made payable to 'RAM Card Offer' and sent, together with the order form or a copy thereof, to 'RAM Card Offer', Electronics Today International, 15 Boundary Street, Rushcutters Bay, NSW 2011. We will then process the orders and send them on to the sponsor who will send out the goods by registered mail. Please allow four weeks for delivery — there could be a longer delay if you have ordered 300 ns memories. The offer closes on Friday, 20 April 1979 and is open to Australian readers only.

Electronics Today International, 15 Boundary Street, Rushcutters Bay, NSW 2011.

Please make cheques/money orders payable to 'RAM Card Offer'. Offer closes 20 April 1979.

Name:

Address:

Postcode

Please supply (state quantities):

.....RAM Card kits at \$348.85 inc tax and registered p & p

.....300 ns memory option, add \$36.80 inc tax each

.....Sets of 32 sockets at \$13.80 inc tax each

.....Full socket sets at \$23.00 inc tax each

TOTAL:


I wish to claim sales tax exemption. My Sales Tax Number is

Signature:


ORDER FORM

AUDITEC POWER 25-250 WATTS


001 Mk.2 30/50 Watts
R.M.S. Power Amplifier
Module. Load 8/4 ohms.
Less than 0.05 percent
T.H.D. Fully short-circuit
protected.




018 60 Watts R.M.S. at
less than 0.1 percent
T.H.D. Load 4 ohms.
Fully short-circuit pro-
tected.



009 120 Watts R.M.S. at
less than 0.1 percent
T.H.D. Load 4 ohms.
Fully short-circuit pro-
tected.




033 Very high quality 100
Watts R.M.S. Power
Amplifier for studio work
etc. Distortion almost
unmeasurable. T.I. distor-
tion almost nil. Produces a
subtle difference in sound
which has to be heard to
be appreciated.



027 250 Watts R.M.S.
power amplifier module at
less than 0.2 percent
T.H.D. Fully short-circuit
protected. 8 ohm ba-
lanced output.



019 25 Watts R.M.S.
power amplifier at less
than 0.1 percent T.H.D.
Powered directly from 12
volt car battery.



AGENTS:
MELBOURNE: Zephyr Products, phone 568-
2922.

BRISBANE: Delsound Pty Ltd, phone 229-
6155.

ADELAIDE: Neil Muller P/L, phone 272-8011.
Protronics P/L, phone 212-3111.

PERTH: Willis Trading Co., phone 321-7609.

CANBERRA: Musique Boutique, phone
81-5255.

BUNDABERG: Bundaberg Hi-Fi, phone 71-
3176.

DARWIN: Darwin Communications Systems,
phone 85-3184.

ALICE SPRINGS: Farmer & Davies Electronics,
phone 52-2967.

MARYBOROUGH: (Qld) Keller Electronics,
phone 21-4559.

MERMAID BEACH: Rave, 38-3331.

NSW: President Sound, Wentworthville,
phone 631-6689; WMR Electronics, Glenfield,
phone 605-1203; Dawes Sound System, Blax-
land, phone 39-4421. Hi-Fi Gallery, Tam-
worth, phone 66-2525; Ray Walsh Sound Sys-
tems, Albury, phone 21-1502.

For descriptive leaflets on these mod-
ules call phone or write to:

**AUDITEC AUSTRALIA
PTY. LTD.**

10 Waitara Avenue,
WAITARA, NSW. 2077.
Phone 48-4116.

(Pacific Highway side of Waitara Station)

A FULL RANGE OF PREAMPLIFIERS, MIXERS AND COMPLETE AMPLIFIERS
FOR PUBLIC ADDRESS, STUDIO AND HI-FI IS ALSO AVAILABLE

NEW ZEALAND READERS

THE ELECTRONICS CENTRE — NOW OPEN — 179 HOBSON ST, AUCKLAND

The one-stop components shop

Stockists of:

RESISTORS
CAPACITORS
DIODES
TRANSISTORS
CMOS
TTL
LINEAR

REGULATORS
ROMS
RAMS
LEDS
7 SEGMENT DISPLAYS
CLOCK MODULES

SWITCHES
POTENTIOMETERS
POWER SUPPLIES
AERIALS
MULTIMETERS
SOLDERING IRONS
IC SOCKETS

CASES & CABINETS
CABLE & WIRE
SPEAKERS
KNOBS
TRANSFORMERS
WIRE WRAP TOOLS

PLUS — too many to list — all devices by NATIONAL TEXAS, FAIRCHILD.

TV GAMES

Teletennis with GI AY-3-8550 plus joysticks.
Tank Battle with GI AY-3-8710.
Chips available, AY-3-8500, AY-3-8550, AY-3-8710 etc.
PLUS A HUGE RANGE OF KITS.

MUSICOLOUR — Colour Organ
— let there be light in your music.

RADAR DETECTORS
Super Orbit, built-up and kits.

Send for our FREE PRICE LIST (please include SAE)
or our ORBIT CATALOGUE — only \$2.00.

To: ORBIT ELECTRONICS LTD., PO Box 7176, Wellesley Street, AUCKLAND, 1.



Centaur Industries

THE S100 SPECIALISTS
PO Box 37243, Winnellie, N.T. 5789.
29 Meigs Cr, Stuart Park. Tel (089) 81-2505.

SEATTLE COMPUTER PRODUCTS, INC.

S-100 static RAM. Top quality assembled and tested boards backed by a full year's warranty — will work in any known S-100 system: no clocks, no refresh, no problems with DMA peripherals, no "hidden gotchas"!


16k-250 ns	\$439	8k-450 ns	249
16k-450 ns	399	4k expansion kit (450 ns)	83
8k-250 ns	279	4k expansion kit 450 ns)	93

GUARANTEED FOR ONE FULL YEAR

S.D. SYSTEMS

Top quality S-100 kits at unbeatable prices (also available assembled and tested). All boards feature sockets for all ICs, and first quality plated-through PCBs.

Z80 STARTER KIT



The ideal choice for the beginner, this is a complete Z80 system on a board. Includes 1k static RAM with sockets for another 1k, powerful 2k ZBUG monitor, extra PROM socket PLUS on-board PROM programmer. There's also a Kansas City standard cassette interface, hex keyboard and six digit display, twelve command keys, four counter/timer channels, two eight-bit parallel I/O ports, and room for you to expand: a generous 2 1/2" x 8" wire-wrap area for custom circuitry AND S-100 INTERFACE WITH POSITIONS FOR TWO S-100 EDGE CONNECTORS ON BOARD.

Comprehensive documentation including full operating and programming guides. Power requirements: +5v at 1A, +25v at 30 ma. (for PROM programming). ALL THESE FEATURES FOR ONLY

assembled and tested \$249

SBC-100 SINGLE BOARD COMPUTER — much more than just a CPU board, it combines the Z80 CPU with 1k RAM, four PROM sockets for 4k or 8k of ROM storage, fully programmable synchronous/asynchronous serial I/O (RS232 or 20 ma. current loop), parallel input and output ports, 4 counter/timer channels and 4 vectored interrupts.

Replaces 3 or 4 boards in many systems!

PRICES REDUCED: KIT

assembled and tested \$369

VERSAFLOPPY FLOPPY DISC CONTROLLER — Controls both 8" standard and 5" minifloppies. Directly controls Shugart SA-400, SA-800; Persci 70 and 277; MFE 700/750 and CDC 9404/9406. Listings of control software are included in the price. THE BEST VALUE IN FLOPPY DISC CONTROLLERS

assembled and tested 239

SHUGART FLOPPY DISC DRIVES

SA-400 5" minifloppy	\$379	SA-400 cable	35
SA-800 8" std. floppy	575	SA-800 cable	39

SOFTWARE

CP/M disc operating system — the industry standard, complete with 8080/Z80 assembler and BASIC-E plus editor and utilities, on 5" or 8" floppy disc

Versafloppy control on 2758

SD Monitor on 2716

Z80 Disc based assembler

LOW COST CASSETTE INTERFACE

Kansas City 2400/1200 Hz, 300 Baud. Comes partly assembled with oscillator and phase locked loop pre-tuned for trouble-free assembly. Mates with either 22 pin edge connector of 8 pin Molex connector

NEW RELEASES:

VDB-8024 VIDEO DISPLAY BOARD — Full 80 x 24 character display, complete cursor control, forward and reverse scroll, blinking, underline, reverse and field protect.

Controlled by a dedicated on-board Z80, it includes keyboard power and signal interface, plus both composite and separate video and sync.

KIT PRICE

assembled and tested \$369

S-100 EDGE CONNECTORS — Imsai type, gold plated to suit Starter Kit and our motherboards

Z80B CPU BOARD

assembled and tested \$235

EXPANDOPROM BOARD — Takes either 2708 or 2716 EPROMs for up to 32k. Comes complete with all support chips and sockets etc. (EPROMs not included). KIT PRICE

assembled and tested 189

EXPANDORAM — High density dynamic RAM, compatible with SD Systems Z80 CPU boards and the Versafloppy controller. Designed to work with 8080 and 8085 CPUs as well, these boards come in 32k and 64k models, which can be purchased partly populated for later expansion if needed.

32k model (uses 4115 RAM)			64k model (uses 4116 RAM)		
Size	Kit	A&T	Size	Kit	A&T
8k	\$199	\$379	16k	\$499	\$595
16k	299	449	32k	689	849
24k	399	519	48k	869	1099
32k	475	599	64k	1049	1299

MEMTECH CO.

MEMTECH ARITHMETIC PROCESSOR INTERFACE

This unique product brings the number crunching power of the fabulous AM9511 arithmetic processing chip to the S-100 computer user. Full 32 bit floating point multiply in as little as 42 us. — and a full complement of transcendental functions, all far faster than software routines.

Also available is BASIC-M, a modified BASIC-E on CP/M compatible diskette which takes full advantage of the APU performance.

APU interface (without 9511 chip) \$159

assembled and tested \$179

APU interface with 2 MHz 9511

assembled and tested \$399

APU with 4 MHz 9511

assembled and tested \$499

BASIC-M on 8" CP/M format

floppy disc

Available soon: modified versions of CP/M compatible FORTRAN and PASCAL compilers

CENTAUR INDUSTRIES

CENTAUR S-100 POWER SUPPLY

Professional quality power supply with rugged, generously rated transformer, top grade filter capacitors (the ones NASA use!), fully fused, transient protected, AC line filter — gives +8v at 22A, ±16v at 3A, AND +28v at 3A for floppy discs and/or PROM programming supplies

(Power supplies shipped freight collect)

STRUCTURED SYSTEMS GROUP — Quality business-oriented software designed for use under the CP/M operating system.

CBASIC — Runs on any 8080 or Z80 system with 20k or more and CP/M. Powerful disc access features — random and sequential files including variable length records. Enhanced control structures (WHILE . . . WEND, optional ELSE clause and STATEMENT LIST improvements to the IF statement), source library facility, machine language routine linkage, powerful PRINT USING, 14 BCD digit arithmetic for accurate financial calculations, and many more powerful features make this the BASIC for business applications. CBASIC is a compiler, so your programs run faster, use less memory, and are much more secure against software piracy.

ON 8" CP/M FORMAT DISKETTE WITH USER MANUAL

QSORT — Runs on any CP/M system. A full disc sort/merge package — easy to use and very flexible.

ON 8" CP/M FORMAT DISKETTE WITH USER MANUAL

NAD — A complete name and address database system with a number of powerful user options. Requires CP/M, 32k and a 132 column printer — it can select records on any field including a user-definable field — print mailing labels — many powerful uses can be easily programmed.

ON 8" CP/M FORMAT DISKETTE WITH USER MANUAL

WAMECO, INC: QMB-12 S-100 MOTHERBOARD — 13 slot motherboard complete with all parts and connectors. Features extensive ground plane and termination of all signal lines, I/O area with 3 regulated voltages.

KIT PRICE

assembled and tested \$145

Add 15 percent sales tax where applicable — we pay postage on pre-paid orders — orders accepted pre-paid or COD. Dealer enquiries invited.

Reaction Timer

Check your reflexes with this simple project.

AT OUR LAST Synergistic Beer Drinking night, one of our readers brought along a reaction timer to prove that reactions *do* slow down during one of these nights! We were impressed with the timer and decided to publish it as a project.

While we have published reaction timers before, the feature which made this unit unique is that it gives a random time interval between tests. This prevents anticipation causing a shorter than actual reaction time. As the prototype was built on veroboard and used 9 TTL packages plus two of the nice (and expensive) HP displays (which have the decoder on board), we decided that at least one pc board was required.


On looking at the logic involved, we saw it could be simplified without any change in operation and with the use of CMOS the power supply is less critical than with TTL.

Operation

If the unit has not been used for more than 30 seconds the display will blank. Pressing the button and releasing it will initiate operation. When the display comes on again it will start counting from zero until the button is pressed. It should be held depressed while the time (in hundredths of seconds) is read. Releasing the button blanks the display for a random time before it comes on again, counting from zero for a second test. If the button is not pressed the display will blank after about 30 seconds to conserve power — no on/off switch is required.

Construction

We will describe only the electrical side of the project, leaving the mechanical side to the individual constructor.

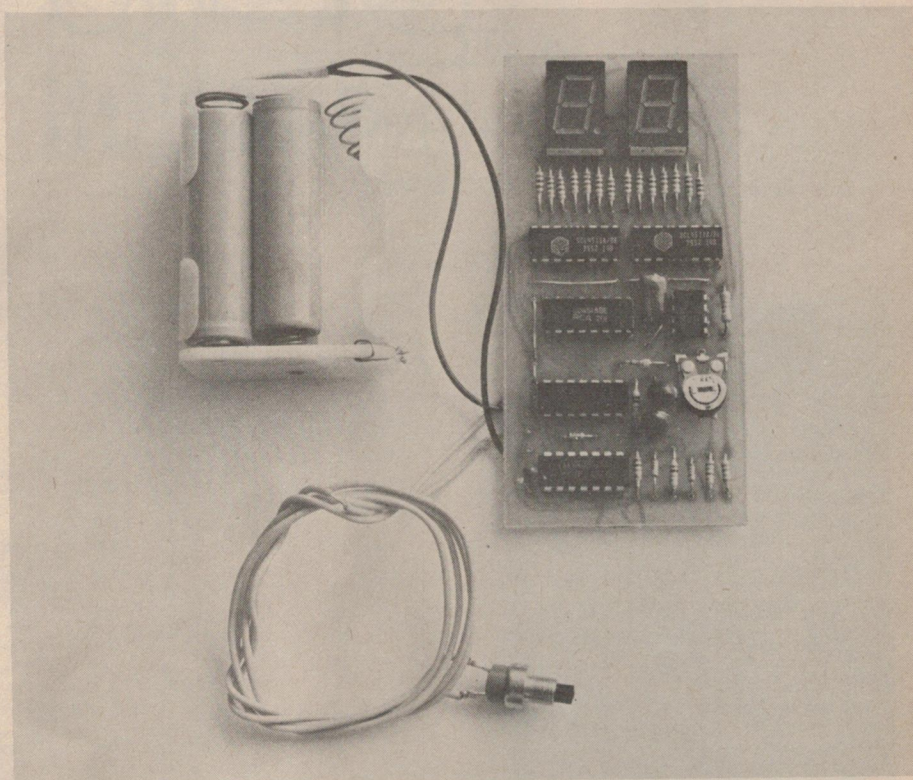


SPECIFICATION - ETI 557

Reaction time	0 to 0.99 seconds
Delay between tests	½ to 10 seconds (random)
Power requirements	4 to 12 volts dc @ 50 mA (display on) @ 1.9 mA (display off)

Project 557

Assemble the pc board with the aid of the overlay in fig. 1. Start assembly with the resistors, diodes and the four links. The 555 IC should now be fitted and soldered, followed by the other ICs. These are all CMOS and their pins should not be handled more than is necessary. As an added precaution, solder the power rails first (pins 7 and 14 on ICs 8 and 16) using an earthed soldering iron. The rest of the components can now be assembled.

Fig. 1. Component overlay of the reaction tester.

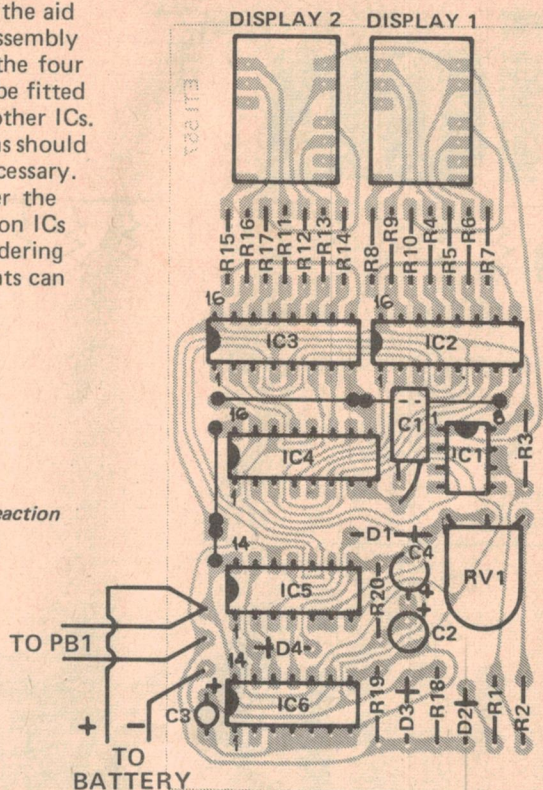

PARTS LIST - ETI 557

Resistors all 1/4 W, 5%

R1 1k
R2 330k
R3 4M7
R4-R17 1k
R18 1M
R19 10k
R20 1M

Potentiometers

RV1 500k trim

Capacitors

C1 22n Greencap
C2 33μ 16V tantalum
C3 1μ 16V tantalum
C4 33μ 16V tantalum

Semiconductors



IC1 555 or 7555
IC2, 3 4511
IC4 4513
IC5 4001
IC6 4013

D1-D3 1N914

Display 1, 2 . . . SEL 521

Miscellaneous

pc board ETI 557
push-button
6V battery

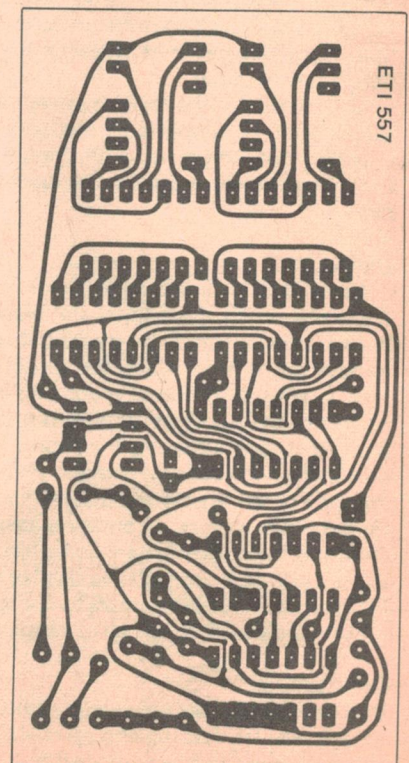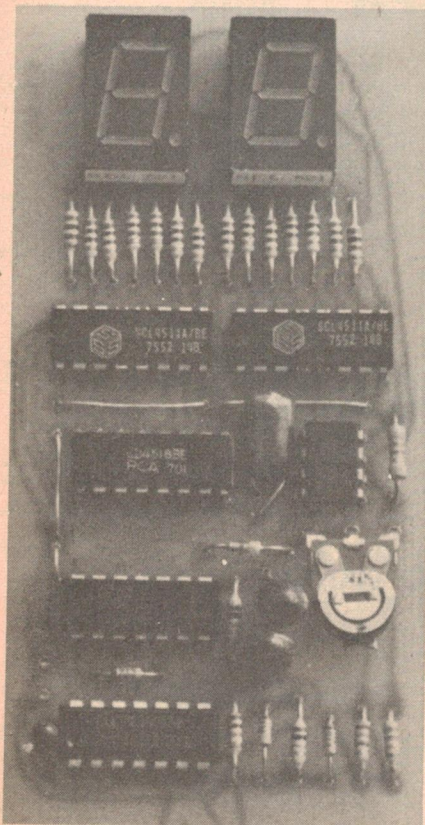

Some of AUSTRALIA'S LOWEST COMPONENT PRICES

Note:: Regular Prices not temporary specials — keep us in mind for that next order.



POTS 38c
(LINEAR 1/4" ALUM. SHAFT)

Linear potentiometers rotary carbon 38c ea. 500 Ohm, 1K, 5K, 10K, 25K, 50K, 100K, 250K, 500K, 1M, 2M

Quality Large red LEDs well diffused wide viewing angle. 17c each, \$1.50 per 10, \$110/K. Quality MOUNTING CLIPS 5c ea. \$4/100

LEDs
\$12 a 100
17c each



TRIMPOTS 15c
(10mm)

Values: 100, 250, 500 Ohm, 1K, 2K, 5K, 10K, 25K, 50K, 100K, 250K, 500K, 1M, 2M

Trade/govt./S.T. exempt: welcome. Send for special lists (e.g. \$26 a 100 pots and \$99 a 1000 LEDs plus tax if applicable. Small quantities also.

TRADE ENTRANCE



METAL CAN TRANSISTOR BC 108 - 13c
10 for \$1.20
100 for \$11

1 Amp. DIODES
50V 1N4001 - 6c
100V 1N4002 - 7c
400V 1N4004 - 8c
1000V 1N4007 - 12c
10% off 100 SAME

\$4 a 100 SIGNAL DIODE IN4148
\$30 a 1000 5c each



5c POLYESTER FILM CAPS


E12 10% 100V
ALL VALUES .001 to .01 — 5c ea. 10% off 100 same uF

ZENER DIODES: 15c each 400 mW 5%
E24 values 3V to 33V

.01	5c	1	10c
.012	6c	12	11c
.015	6c	15	12c
.018	6c	18	14c
.022	6c	22	15c
.027	6c	27	16c
.033	7c	33	18c
.039	7c	39	19c
.047	7c	47	20c
.056	8c		
.068	8c	All values	
.082	9c	in uF	

5c ELECTROS (UPRIGHT)

(per 100 prices in brackets)
Cap. 16V 25V 50V
0.47 uF all all all
thru to all all all
10uF 5c(\$3 1/2) 6c(\$3 3/4) 7c(\$4)
22uF 6c(\$3 3/4) 7c(\$4) 8c(\$5)
33uF 8c(\$4) 9c(\$5) 10c(\$6)
47uF 9c(\$5) 10c(\$6) 11c(\$7)
100uF 10c(\$6) 12c(\$7) 14c(\$11)
220uF 12c(\$8) 16c(\$10) 35c(\$17)
470uF 16c(\$12) 22c(\$16) 45c(\$30)
1000uF 22c(\$18) 30c(\$25) 75c(\$50)
1000uF/16V axial — 20c ea. \$8 per 50
2200uF/50V PCB — 95c ea. \$9 per 10
Full axial price list — SAE



SCRs C106Y1 40c C122E \$1.20

SCRs:
0.8A 30V C103Y — 35
0.8A 200V C103B — 60
4A 30V C106Y1 — 40
4A 400V C106D1 — 75
8A 400V C122D — \$1.05
8A 500V C122E — \$1.20

TRIACS:
2A 400V ESP240 — 65
6A 400V SC141D — \$1.30
10A 400V SC146D — \$1.50
DIAC ST2 — 35
Chart to identify leads
Plus trigger info. — 10c

25 A 400V
SC260D TRIAC C37D SCR
EA. \$2.50



2c RESISTORS 1/4W
\$1.80 per 100
SAME RESISTANCE

Our 3 year old price still current. Opposition hoped we would go broke but our price remains at 2c ea. 1 Ohm to 10 M 1/4W 5% E12 carb. film.

APPROX. SIZE:
1/2W miniature metal glaze
1 Ohm to 1M 5% E12
1M2 to 10M carb. film (larger)

RESISTORS 3c
\$2.50 per 100
SAME RESISTANCE

Keep electronics a hobby and not a luxury, compare our prices and buy from us. Same day turnaround service (unless swamped). All goods top quality and new. No minimum order. One P/P charge of 45c regardless of quantity. Advert current 3 months for late readers. Price list No. 9.

DIGGERMAN ELECTRONICS

P.O. BOX 33, CORAMBA, N.S.W. 2466

COMPUTER MAIN FRAME

\$100 or 6800 \$166.00

- 11 slot backplane with ground plane, fully card guided.
- Rack mount or bench top mount.
- 8V at 10 amp, + 16V & - 16V at 1 amp power supply, requires regulators for use with 6800.
- Anodised aluminium (black) with all holes punched.
- Muffin fan and key operated power switch.
- 17" wide x 12" deep x 10" high.
- Will suit 6800 D2 kit in 6800 version.
- Basic frame kit — 5 sockets, backplane, all metal work, all card guides, screws etc.
- Power supply kit — transformer, filter, capacitors, bridge rectifiers, etc, all to suit holes punched.
- Accessory kit — fan, key switch, cable, lugs, nuts, screws, grommets etc.
- BASIC FRAME KIT — Rack mount \$166.00, Bench top mount \$187.00. POWER SUPPLY KIT — \$79.00, ACCESSORY KIT — \$46.00.


Main frame kits are tax free prices, add 15 percent if applicable. Delivery is FOB overnight transport.

EPROM ERASERS

- Model LEE/T 40 PROM capacity with timer & safety switch, \$104.34.
 - Model LEE as above without timer, \$93.75.
 - Model MEE/T 9 PROM capacity with timer & safety switch, \$83.47.
 - Model MEE as above without timer, \$73.90.
- All Erasers \$3.00 P&P.

\$100 PRODUCTS

- **\$100 16K EPROM Board Kit**, switched 8K boundaries, 1-4 wait cycles, low power Schottky chips, sockets on all chips, plated through holes, solder mask: \$15.00.
- **\$100 Wire Wrap** with 81LS95 buffer patterns, F/glass board: \$24.50.
- **\$100 Extender Board** with socket & labeled test points: \$24.50.
- **\$100 Mother Board**, 8 slot double sided 7" x 7": \$24.50.
- **\$100 Mother Board**, 11 slot 8" x 12" double sided: \$36.00.
- **\$100 Sockets**, gold plated, w/w: \$8.50.
- **Number Cruncher Kit**, uses MM57109 data and software: \$56.00.
- **Front panel Display**, address and data bus in hex and binary, status LEDs, 2 port displays 10" x 8": \$95.00 — Above \$100 products include tax.
- **\$100 16K RAM Board**, 2114's, 4K addressing, write protect, wait states, plated through holes, solder mask, bank select: assembled & tested \$346 plus tax.

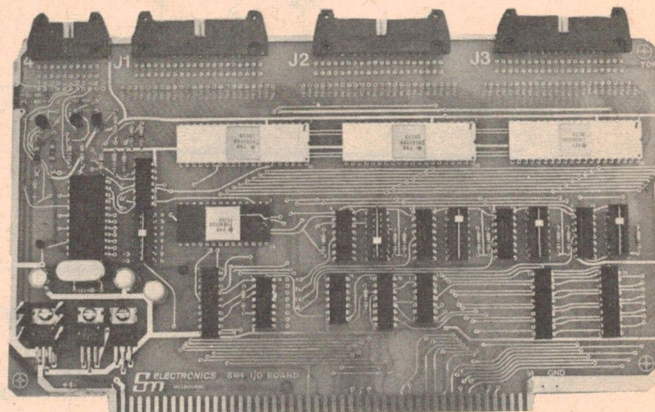

\$100 I/O PORT BOARD

New from SM ELECTRONICS

- 9 programmable parallel ports (8255).
- 1 programmable serial port (8251) selectable as 20 mA current loop for TTY, RS232 or 5V TTL.
- Xtal controlled baud rate generator from 75 to 9600 baud.
- Baud rate switch selected.
- Fully decoded addressing for ports via Dii switches.
- Sockets supplied for main chips (5).
- 3 x 36 way and 1 x 10 way flat cable sockets.
- Plated through holes with solder resist mask.
- Fibreglass board with gold plated edge connector.
- Fully buffered with LS chips.

KIT PRICE \$164 plus 15 percent S/T.

ALL PRODUCTS MADE IN AUSTRALIA



SM ELECTRONICS MELBOURNE

10 Stafford Crt., Doncaster East, Victoria, 3109.
Box 19, Doncaster East, 3109. Ph (03) 842-3950.
Built & tested prices and tax free prices on application.

Introducing Vector MT



Designed to interface directly with the VECTOR MZ microcomputer. Extended video/input output system in PROM. Optional 24 x 80 display.

\$1275


- 16 x 64 display
- 7 x 9 matrix
- U/L case
- Reverse video
- Paging & Scrolling
- H/V line graphics
- Cursor motion
- X/Y addressing
- Print control sequences in BASIC.
- Block graphics (48 x 128)
- A totally integrated video system
- \$1275 plus Sales Tax and interface cable



MICROCOMPUTER DIVISION
A.J. & J.W. DICKER PTY. LTD.

VECTOR GRAPHIC INC.
Australian Distributor

24 Woodfied Bvde., Caringbah 2229
5245639

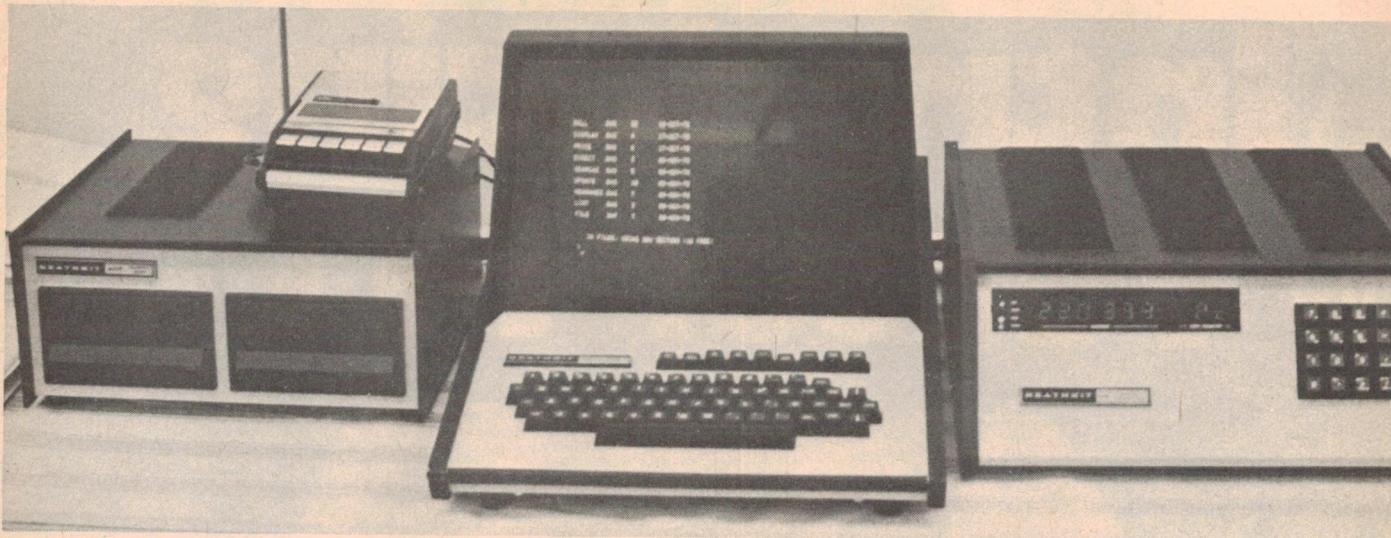

The Heathkit H8 system from Warburton Franki.

Computer Show

We report on the extremely successful show held at Box Hill Town Hall in December.

ONE OF THE BIG 'personal computing phenomena' in the US is the home or personal computer show, which lets hobbyists and members of the public see and play with the latest hardware. While these have been running in the States for a couple of years now, they have only recently started in Australia. Over the weekend of 9th and 10th December last year, Box Hill Town Hall was the venue for Melbourne's first computer show, organised by Australian Seminar Services.

A large number of Australian importers, distributors and manufacturers of micro gear were there, along with some 'fringe' organisations like Box Hill Technical College and of course ourselves!

SM Electronics

Lots of S-100 units including a number-cruncher board.

Pennywise Peripherals

Prototyping kits and peripherals for Motorola and Intel devices, as well as cards to expand your D2.

AJF Systems & Components

PeCos, a 6502-based learning/development system.

Sontron Instruments/Byte Shop

Almost everything.

ASP Microcomputers

ASP System One is 8080-based. Also featured was a Selectric conversion kit.

Futuretronics

Micro-based games, including the excellent Atari system.

Abacus Computer Store

M100 Z-80 BASIC system from Sord.

Rod Irving Electronics

Small business system with Z-80 and disk, also including spooled printer software!

Strand Electric

Exorciser plus add-ons from this rather diverse company.

Dick Smith Electronics

Has introduced the Exidy Sorcerer — more of this in ETI at a later date, perhaps?

Delta Scientific Products

Wide range of TI calculators.

RML Computers

Research Machines 380Z with Z-80.

Computerland Australia

Apple II.

South West Electronics

MSI 6800-based system with disk.

Box Hill Technical College

Courses in electronics, microprocessors and programming.

Honeywell

Industrial computer components.

The Dindima Group

Altos Sun series of Z-80 computers with disks.

A J & J W Dicker

Vector MZ Z-80 S-100 system with disks.

Tandy International

TRS-80 with level II and software.

Warburton Franki Industries (Melbourne)

Heathkit range of educational micro-processor products.

Informative Systems

Large range of business systems and S-100 cards and low price Tandy add-ons.

Last, but not least, ETI was there. We were accompanied to Melbourne by Rod Whitworth of Automation Statham who displayed a Sol System IV with four floppy disks. Also on the stand we had the prototype of an S100 card cage from Acoustic Electronic Developments of Sydney — we will have more on this in a later issue. Naturally, we had a selection of ETI projects on the stand; the ETI 640 VDU and 641 printer, 635 power supply, and the 650 STAC timer. The hit of the stand (maybe even the show) was the ETI 639 SC/MP-based doorbell — it seemed that every kid (regardless of age) in the place was pushing the buttons, and of course this attracted more people.

To all the ETI readers who asked us questions on the stand — it was good to talk to you! We're only sorry we didn't have more time to discuss our projects and plans with you, but by Sunday afternoon we were getting hoarse anyway!



Dick Smith displayed the Exidy Sorcerer.



Rod Whitworth expounds upon the Sol System IV.



Futuretronics displayed a number of games.



The Vector MZ system was displayed by A J & J W Dicker.




Computerland displayed the popular Apple II and Appledisk.



Strand Electronics displayed a range of 6800 gear.

SEMCON MICROCOMPUTERS PTY. LTD.

VIDEO INTERFACE CRT-01

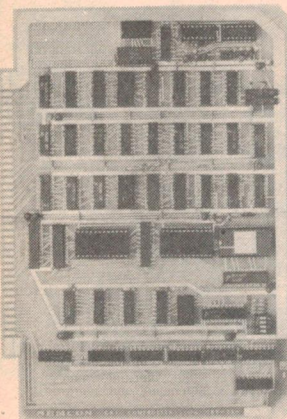

PRICE
\$285
PLUS TAX

This powerful unit has been designed to efficiently interface the memory of Motorola compatible systems directly to a CRT display. It is software driven and with appropriate program can be made to emulate the majority of functions of currently available intelligent terminals.

- No page buffer — the card has a line buffer that is continuously refreshed from processor memory on a DMA basis; a) Phase 2 when CPU VMA is low, or, b) Phase one. This is completely transparent to the processor resulting in a flicker free display without halting or slowing processor.
- Displays up to 32x2k pages simply by changing contents of 8 bit page register.
- Hardware scrolling controlled by scroll register.
- Displays full 128 ASCII character set. (Control characters optional).
- Inverse video (may be mixed with normal video).
- Coarse graphics.
- Link programmable character/line (48, 64, 80).
- Link programmable lines/page (20, 22, 24).
- Additional line at bottom of page for status information — unaffected by scrolling.
- Dot rate controlled by phase locked loop — automatically adjusts to different formats.

32K STATIC RAM CARD features:

Low price!

\$569 kit

	KIT	BUILT
8K	\$249	\$275
16K	\$359	\$389
24K	\$469	\$499
32K	\$569	\$599

- 4 x 8K Blocks, each DIP switch selectable, each block can be write protected.
- Low power 2114 (1K x 4).
- 300 nS access.
- Motorola Bus compatible.
- Fully buffered.
- Ground & +5 Rails in grid network for improved performance.

RAMS: Texas 4K x 1 300nS \$7.50
2114L 1K x 4 300nS \$7.50
Quantity pricing on request.

CARD CAGE/BACKPLANE:

- Designed for Motorola Cards
- Anodised Aluminium chassis
- Sturdy Construction
- Tin Plated Backplane
- Accommodates 8 cards

\$74.00

EDGE CONNECTORS —

43 x 2 x 0.156" \$8.50 each
Eight for \$59.00

S100 Connectors \$8.50



8K/16K EPROM MODULE **\$135**

2708's
1-8 \$13.50, 9-16 \$12.50.

8K STATIC RAM 350 n.s. Kit now only **\$199**
Built \$250.

Please add 15 percent S/T to all prices

SHOWROOM: 1 Chilvers Rd, Thornleigh, NSW. 2120.

MAIL ORDER: PO Box 61, Pennant Hills, NSW. 2120.

PHONE: 848-0800. Add 15 percent S/T. P&P \$1.50. Goods valued over \$100 will be sent by courier, standard charges for freight and insurance, Syd. metro — \$2.50, NSW country and interstate — \$7.00

MEMOREX SPECIAL OFFER

90-Minute
Chromium Dioxide
Cassette

Regular Price **\$12.00***

Special Price **\$7.99**

You Save **\$4.01**



MEMOREX Recording Tape
"Is it live or is it Memorex?"

WHILE STOCKS LAST
*Recommended retail price



tracker RECORD CARE SPECIAL OFFER

RC-1 Starter record
care kit — **\$3.60**

PRC-1 Professional record
care kit — **\$4.25**

WHILE STOCKS LAST

Please send to

DEBCHAP PTY. LIMITED
PO Box 328, Artarmon, NSW. 2064.

NAME.....

ADDRESS.....

..... P/code.....

..... Memorex Special Offer at \$7.99 for 2 CR02 C90's.

..... RC-1 at \$3.60 ea.

..... PRC-1 at \$4.25 ea.

I enclose cheque for \$.....

MAD MAL'S

MAD SALE!

FEB ONLY

OR WHILE STOCKS LAST!



LOOK AT THIS!
MAD MAL'S END 'O '78 BULK STORE CLEANOUT
 Space needed for '79 stocks
SEND SAE FOR LISTS
 OF.....resistors from 1c, 5w,
 10W from 10c, capacitors from 2c,
 transistors from 10c, diodes from
 4c, transformers from \$1, PCBs
 from 20c, plugs & jacks from 5c,
 electros from 3c, speakers from
 50c, yokes, eht transies from \$1,
 pots from 5c, knobs from 5c,
 relays from 50c, also hardware,
 electrical & professional parts
 to clear regardless of cost.
Too MANY ITEMS TO LIST HERE!
 You'll save a bundle—must send SAE!

BARGAIN BUYS

- PHILIPS RF/IF AM TUNER** Complete 3 trans module & info. \$2.50
TELESCOPIC AERIALS 2 for \$1
 Top quality chrome 8' 6" LONG
PERMEABILITY TUNERS Manual, 4 coils, with knobs. \$1
PUSH-BUTTON TUNERS 4 coils suit Synchrodyne tuner \$2
50 PLASTIC POT-WASHERS Saves desolting precious front panels \$1
PCB ETCH RESIST PENS Dale 35 top quality pens \$1.50
CAR RADIO SUPPRESSORS 15K Ω for interference 3 for \$1
30 PVC MAINS TERM. BLOCKS Insulated terminal blocks \$1
5x TO3 Mounting Kits Includes mica, insulators, screws, nuts \$1
12 POT NUTS & WASHERS Standard brass auto, etc. \$1
VALVE OUTPUT TRANS. General Purpose replacement \$1
5K 25W CERAMIC POTS IRN heavy duty, brand new \$2
NT-3102 EMT TRANS. New type Philips EMT Transformer \$6.50
100 PCB PINS Tinned terminals for PCB mounting \$1
TO-18 TRANSISTOR HEATSINKS Space saving circular design for \$1
2x FLAT-PACK HEATSINKS Compact finned heatsinks for TO-220 trans. \$1
2x 3/8" FERRITE RODS Handy 8" long, replacements \$1
NEON BEZEL 240V New, std 3/8" mounting 40c

FERRITE ROD AERIALS
 200mm long x 9mm diam
 132mm x 9mm diam
 142mm x 16mm x 3mm
 126mm x 13mm x 5mm
 55mm x 13mm x 5mm
COMPLETE WITH COILS
\$1.25 or 10 for \$10

WANTED TO BUY
 LARGE OR SMALL QTY'S OF
JAPANESE SEMICONDUCTORS
 especially 2SA....., 2SB....., 2SC.....
 2SD....., transistors. **CASH PAID!**
 Due to huge demand, we
URGENTLY need stock!

TELESCOPIC AERIALS
 Photos & swivels
 Suit portable to 100m
 TV's etc. to 100m
1.75 or 10 for \$10

240V LIGHT FLASHERS
 Complete, wired with
 lampholder (no glass)
5.95 or 10 for \$10

BEST FUSE Value
 2AG 20mm x 5mm
 3AG 32mm x 6mm
 100mA, 125mA, 160mA, 200mA, 250mA, 500mA, 1A, 1.5A, 2A, 3A, 5A, 10A, 15A, 20A, 25A, 30A
5 for \$1
 All New **SLOW BLOW FUSES**
 500mA, 600mA, 1A, 500mA, 750mA, 1A, 1.5A, 2A, 3A, 5A
45c or 10 for \$10

HIGH OUTPUT BUZZERS
 BZZZZZ
 12V
5.15 NOW
4.50 ONLY
VERY HIGH OUTPUT
5

220V AC RELAYS
 4% Plug-in
 10 Amp Contacts
\$2.65
 SOCKET \$1 ea

SEMICONDUCTORS
 *Originals or equivalents supplied.
 *All new, top grade, no rejects.

AY6108	95c	7441	\$1
AY6109	95c	7473	70c
BC107	15c	7490	70c
BF180	30c	7400	20c
BC109	15c	7401	20c
BC337	25c	VA709	50c
BC338	25c	2N3053	35c
BC179	20c	2N3643	30c
BFX88	50c	2N4250	40c
IN5059	200 PIV	2.5A rect	20c
IN5404	400 PIV	4A rect	5c
IR 60	600 PIV	2.5A rect	75c
ITT or STC	TA108	10Watt	\$6.50
2SB337	TO3 Germanium		\$1
71C44	40V 600mA SCR		20c

SOCKET SPECIAL
 14 PIN 16 PIN
5 for \$1 4 for \$1
PLUGS 14 or 16 PIN Suit above 10c

KEYBOARDS
 German Ruff
 Keyboard kits
 0-9 and CLR keys
 Were \$5.90 now \$4
\$19
CB/AM/FM RADIOS!
 Sensitive a powerfull
 Monitor all CB chans
 Tunes Broadcast & FM

2SD200 2SD350
 TO3 Horizontal Output Transistors
 1-9c 10c 1-9c 10c
NEW BONANZA PAKS

ASSORTED PARTS
 A mixed bag of high quality
 parts, samples, end-of-line
 components, specials,
 manufacturers surplus,
 supply etc. including
 semiconductors etc.
MINIMUM 500Gms Wt.
\$5

BSR CHANGERS-NEW,
COMPLETE, WITH STEREO CART,
Huge Purchase—full size
 3 speed, 11" platter **ONLY \$25**

13.6V 2.5A POWER SUPPLY KIT assembled
\$21 Scoop purchase
 from overstocked
 manufacturer!
 Fully built, rigidly
 protected, assemble in 1/2 hr.

MAD MAL'S ONE-EYED SPECIALS

- 3.5mm to 3.5mm PLUG LEAD** 75c
 1 metre long general purpose lead
5 PIN DIN to 4x RCA LEAD \$2
 Ideal for tape to amp etc. 1 metre
2 WAY INTERCOM \$12
 Master/Slave, complete, wire, etc
CASSETTE HEAD CLEANER \$130
 Special cassette & fluid, was \$1.99
DE-LUXE STEREO H'PHONES \$15
 With Vol, Tone controls, curly-cord
INDOOR FM AERIAL \$1.50
 Dipole aerial was \$1.85
1000UF 63VW ELECTROS 75c
 New, Elna Pals, for \$6.50
3AG FUSEHOLDERS 15c
 Std 1 1/2", Chassis mounting
10 ASST. CERM. TRANSISTORS \$1
 All new, 3 lead, suit replacement for
5 PIN DIN to 5 PIN DIN LEAD \$2.25
 1.5 metre long, Record/Playback
FM OUTDOOR AERIAL \$8
 Gives up to 6 dB gain, was \$15.50
3 CORE MAINS LEAD/FUG etc. \$1
 New, approved, approx 2.5m long
DE-LUXE CASSETTE HOLDERS \$1
 Holds 10 cases, hor or vert mfg.
2 TRANSISTOR RADIO KIT \$2
 Beginners kit, last few, was \$4.50
TRANSISTOR RADIO REPAIR KIT \$2
 All new, 3 lead, 1 amp
30M REELS SPEAKER CABLE \$3
 2 core fln, 8 brown cable
PUSH BUTTON SWITCH 5 for \$1
 Top grade, reduced from \$3.95
HEAVY DUTY 10A TOGGLE SWITCH \$1
 250V AC, SPDT, ceramic off, 10A
UMS X-4 BATTERY HOLDER 30c
 Holds 4 night cells, few only
TV TUNER by SHARP \$5.95
 12 Channels, small size, transistor

TRANIMATE
 by Ferris
 2 TRANSISTOR
 TUNABLE RF
 PRE-AMPLIFIER
 Sale
 price **\$2.50**
 pulls in weak and
 distant stations
 Simple connection to radio—Tunes BC band

7"x5" CAR SPEAKERS
\$3.50 4a
OVAL SPEAKERS
 5"x4" or 6"x4"
 Both \$2.50
ELECTROLYTIC CANS
 3,300 uF 50VW
1.50
 BRAND NEW!
SCOOP PURCHASE
BE QUICK FOR THESE!

EVERY MAIL ORDER OVER
\$25 receives FREE \$2.00
NSW JACKPOT LOTTERY TICKET
SENT TO YOU WITH YOUR ORDER
2 3/4" 40 Ω SPEAKERS \$1.50
5"x3" 27 Ω SPEAKERS \$2.50

MAD LUCKY MAL'S DIP OFFER

- 10 ASST. SWITCHES** D.P.D.T.,
 Toggle, Rotary, Slide, etc. \$2
20 ASST. NEW POTS \$2
 Incl. ganged, switch, single etc.
40 VARIOUS KNOBS good \$2
 Assortment, Ideal for Servicemen
50 ASST. TAGSTRIPS \$2
 Handy for Project Builders
100 ASST. CAPACITORS \$2
 Ceramic, Poly, Mica, All NEW
200 HARDWARE PACK \$2
 Nuts, Bolts, Spacers, Clamps etc.
500 1W RESISTORS \$2
 Mixed-up for experimenters
200 1W RESISTORS \$2
 We don't have time to sort out
100 CERAMIC CAPS \$2
 Asst. Values and Voltages etc.
50 HI-STAB RESISTORS \$2
 0.5, 1, 2 per cent high grade
40 POWER RESISTORS \$2
 3W, 5W, 7W, 10W Asst. Values
25 PRE-SET POTS \$2
 Mini. Horiz. and Vert. Mtg.
12 SLIDER POTS New, good \$2
 Quality, Various types
45 ELECTROLYTICS \$2
 Good variety, PCB & inrail
20 RF, OSC COILS \$2
20 ASST DIAL LIGHTS \$2

NEW: METAL SOLDER SUCKER
 Soldering Iron
 Solder Mitten

HEAVY DUTY, LONG LASTING WITH TIP CLEANING TOOL
\$4.50

DC-DC CONVERTOR
 Input: 12 Volts
 Output: 6V at 100mA
 6V at 200mA
 6V at 300mA
\$2.50 or 3 for \$6

LIGHT DIMMER KITS
 or motor speed control
 Great Value!
700 WATT \$4.95
 Capability, with RFI OR
 Suppression 2 for \$9

10 WAY COMPARATOR SWITCH—Switches \$4.50
 10 DPDT contacts, new
 Instant push-buttons
 Suit Intercom, Hi-Fi, P.A. etc

MINI H.D. RELAY
 700 Ω COIL, 10 AMP
 CHANGE OVER CONTACTS
\$1 ea or 10 for \$8

DE-SOLDERING WICK 1.5m
\$2
 EXTRA LONG!

STEREO CASSETTE TAPE HEADS
 Suit Vortex etc,
 most cassettes \$9.95
 Limited Quantity

IC TEST CLIP
 INDISPENSABLE FOR ALL
 SERVICEMEN, HOBBYISTS
 Allows easy pin
 checking of all
 14-16 Pin IC's
 Special at
\$3.95

PL-259 PLUGS
 with in-built reducer etc
 NEW, TOP QUALITY
60c or 10 for \$5
 Importer sacrifices stock!

Orders To MAD MAL
electronics
43. CROYDON NSW 2132
P.O. Box 718 Parramatta Rd. Croydon NSW
OPEN 7 DAYS
PH: 797-6144
ADD 10%

APPLIED TECHNOLOGY - MICROPROCESSORS

Getting into microprocessors need not cost you an arm and a leg! At Applied Technology we have adopted the approach of using self contained kits as fundamental building blocks. Using this approach, complete with an extensive warranty and technical support we have introduced many beginners and professionals to the exciting world of microprocessors.

KB04 KEYBOARD

COMPLETE KIT INCLUDING KEY TOPS, MECHANISMS, SUPPORT BRACKET, PCB \$59.50
MATCHING NUMBER PAD, CURSOR CONTROL & SPARE MECHANISMS AVAILABLE.

KEYBOARD ENCODER/UART (EA 78UT4)

IDEAL FOR THE EA VDU THIS KIT INCLUDES ENCODER CHIP AND UART WITH FULL ASSEMBLY DETAILS \$32.50

DG640 SOFTWARE CONTROLLED VDU

AS DESCRIBED IN ETI THE 640 IS IDEAL FOR ADVANCED SYSTEMS FEATURES 64 CHAR X 16 LINES, UPPER/LOWER CASE & GRAPHICS. \$100 COMPATIBLE A MOST PROFESSIONAL UNIT COMPLETE WITH 54 PAGE MANUAL AND SOFTWARE \$149.50

HEAVY DUTY POWER SUPPLY

THE EPS 100 IS A MODULAR POWER SUPPLY IDEAL FOR ALL MICROPROCESSORS. OUTPUT IS: +5V 10A, ±12V 1A REGULATED AND +8V, +16V UNREGULATED. KIT INCLUDES "C" CORE TRANSFORMER, HEATSINK, PCB, ALL COMPONENTS AND INSTRUCTIONS \$55.00
Post Only—Post & Pack \$ 5.00

EA 2650 STARTERS KIT

COMPLETE PCB KIT, 1 K RAM INCLUDING ALL DOCUMENTATION AND SAMPLE PROGRAMS TO RUN \$59.50

KT 9500 SIGNETICS 2650 KIT

FULLY BUFFERED 2650 WITH 2 1/0 PORTS AND 512 BYTES RAM ON A TOP QUALITY PLATED THROUGH PCB \$115.00

CAN BE READILY EXPANDED
(ASK FOR DETAILS)

LOW COST EA VDU

AS DESCRIBED IN EA—FEBRUARY, 1978 \$97.50

VIDEO MODULATOR

CONNECTS TO ANY T.V. AERIAL SOCKET \$4.50

CASSETTE INTERFACE (SECI)

THE S.E.C.I. IS AN IDEAL INTERFACE TO ENABLE A MICROPROCESSOR TO USE BULK MEMORY ON A CASSETTE. S.E.C.I. IS PART ASSEMBLED WITH A TEST TAPE AND FULL INSTRUCTIONS. NO CRO NEEDED FOR ALIGNMENT . \$24.50

SERVICE

NO NEED TO FEEL SORRY IF A KIT DOESN'T WORK, WE SERVICE ALL OUR MICROPROCESSOR AND ASSOCIATED KITS. APPLIED TECHNOLOGY IS WELL KNOWN FOR THE HELP IT GIVES TO THOSE IN THE EXCITING WORLD OF COMPUTERS WITH ITS SERVICE AND SUPPORT PROGRAM COURSES AND FREE SEMINARS. DETAILS WITH ALL KITS...

SOFTWARE

GAMES TAPES 1 & 2: MANY GAMES ON EACH TAPE INCLUDING ASTROTREK—THE SPACE WAR GAME \$12.75 each

UTILITY TAPE: CONTAINING DISASSEMBLERS, ASSEMBLERS, BLOCK MOVE ETC. \$12.75

PILOT: A TEXT ORIENTED LANGUAGE, VERY SIMPLE TO USE AND IDEAL FOR TEACHING CHILDREN.

BASIC: FITS IN 4K FULL FLOATING POINT ARITHMETIC, ADVANCED STRING HANDLING. ON TAPE WITH MANUAL \$29.50

USER GROUP: A MANUAL CONTAINING SOFTWARE WRITTEN BY USERS AND SIGNETICS APPLICATION NOTES \$40.00

PROGRAMMING COURSE: LEARN TO WRITE YOUR OWN PROGRAMS AFTER ONLY A WEEKS STUDY, WRITTEN IN EASY TO UNDERSTAND LANGUAGE. IDEAL FOR THE BEGINNERS \$12.50


BINBUG: A MONITOR PROGRAM TO REPLACE PIPBUG FOR USE WITH THE DG640 VDU IN EPROM \$25.00



POST & PACKING \$2.50

ALL KITS EXCEPTED WHERE STATED

OVERNIGHT AIR DELIVERY \$6.50



POSTAL ADDRESS: P.O. BOX 355, HORNSBY, N.S.W. 2077
HEAD OFFICE/SHOWROOM—1A PATTISON AVE., WAITARA
(9.00—5.00 MON. TO SAT.)

PHONE: (02) 487 2711



The Yaesu FRG 7000

General coverage receiver features digital readout and Wadley loop front end.

THE FRG-7000 is Yaesu Musen's successor to their popular FRG-7 general coverage receiver.

Marketed as a high performance receiver, the FRG-7000 features the popular 'Wadley-loop' method of band selection covering the frequency range 250 kHz to 29.9 MHz and incorporates a LED digital frequency readout giving a 1 kHz resolution. It features selectable sideband reception (USB/LSB) and separate IF filters are used for AM and SSB reception. Also featured is a digital clock which can be set to display local or 'universal' (GMT) time. The clock also incorporates a facility for switching the receiver on and off at preselected times.

The Wadley-loop

As many readers may not be familiar with the Wadley-loop method of band selection, it would be instructive to examine the technique and its application in the FRG-7000 receiver.

The basic block diagram is shown in figure 1, along with the frequency relationships.

The 1 MHz crystal oscillator sets the basic tuning range or the 'base-band' — a 1 MHz baseband is almost universally used.

The Wadley-loop front end selects 1 MHz bands depending on the combination of the "MHz" oscillator and one output of the harmonic generator. The band selected will be converted to the range 2-3 MHz which is tuned by a conventional superhet incorporated in the complete receiver. This, the IF receiver, is tuned from 3 MHz down to 2 MHz to tune up the band selected; that is, reverse tuning. We shall see why shortly.

The "MHz" oscillator is a free-running VHF oscillator generally covering the range 50-80 MHz. The 'transfer' filter is usually around 40-50 MHz and has a bandpass of 1 MHz. The 're-mix' filter is below the transfer filter frequency (2 MHz below the lower frequency cutoff of the transfer filter). The re-mix filter provides the second injection frequency, f_2 , to the 2nd signal mixer, attenuating all the other products produced by the pre-mixer.

To get a clear idea of how the Wadley-loop works, and the advantages it provides in practice let's substitute some numbers in figure 1 and see what happens.

In the FRG-7000, the MHz oscillator covers 55.5 to 84.5 MHz. The harmonic generator puts out 'spikes' every 1 MHz between 3 and 32 MHz

and the second injection frequency, f_2 , is 52.5 MHz. The transfer filter is centred on 55 MHz and extends from 54.5 MHz to 55.5 MHz.

Now, suppose we wish to tune in a signal on 7.900 MHz. First, the receiver's preselector would be set to the appropriate range (4-10 MHz in this case) and the MHz dial set to select the 7-8 MHz range. This sets the MHz oscillator (and thus the first injection frequency to the 1st signal mixer, f_1) to 62.500 MHz.

This will then heterodyne with the harmonic at 10 MHz, from the 1 MHz crystal, to produce an output at 52.5 MHz from the re-mix filter which is then applied to the 2nd signal mixer.

The signal on 7.9 MHz is heterodyned to 54.6 MHz (f_T) and passes through the transfer filter. When heterodyned with the second injection frequency (f_2) of 52.5 MHz the desired signal appears at 2.1 MHz. Tuning the IF receiver to this frequency will resolve the desired signal present on 7.9 MHz!

A signal on 7.100 MHz would be 'transferred' to 55.4 MHz and would appear on 2.9 MHz at the output of the 2nd signal mixer. Thus, it can be seen that the IF receiver tunes 'backwards' to tune the 1 MHz band selected.

The Yaesu FRG 7000

Problems

That's all very fine, but how is the MHz oscillator accurately set to the required frequency, and what happens if it drifts, assuming it can be set accurately?

Problem. What the Wadley-loop does is *cancel* the drift and setting errors in the MHz oscillator, obviating the necessity for a highly stable oscillator or series of oscillators. What happens here?

For the sake of argument, say we set the band oscillator 20 kHz high in frequency. That is, 62.520 MHz in the example detailed above.

The second injection frequency would then appear at 52.520 MHz and the signal on 7.900 MHz would be transferred up to 54.620 MHz. When this is heterodyned with the second injection frequency in the 2nd signal mixer, the output will be on . . . 2.1 MHz still!

The same story goes if the MHz oscillator drifts.

Obviously, there are limitations to the amount of error that can be tolerated in the MHz oscillator. In practice a figure of 60-80 kHz is settled upon.

Here comes the second problem. How to provide a re-mix filter at 50 MHz with that sort of bandwidth!

The solution . . . put the re-mix filter on 10.7 MHz, use a readily-available ceramic filter designed for FM receivers (+/-75 kHz), heterodyne the output of the pre-mixer down to 10.7 MHz and then reheterodyne it back up again! Cunning stunt, what?

At this stage, cast your eyes upon figure 2. This is what Yaesu have done in the FRG-7000 front end. A crystal oscillator on 62.5 MHz mixes the output of the pre-mixer down to 10.7 MHz where it is passed through a ceramic filter. The output of the filter is then mixed back up to 52.5 MHz, using the same 62.5 MHz crystal oscillator output.

The FRG-7000

The general block diagram is shown in figure 3. Note that the 'UNLOCK' detector comes off the input to the second mixer. When the MHz oscillator is set within about 70 kHz of the required frequency there will be an output from the reheterodyne re-mix filter and a high output from the following buffer amplifier. This output is detected and used to extinguish the 'UNLOCK' indicator lamp. If the MHz oscillator drifts outside the bandpass of the re-mix filter the output from the buffer amplifier will decrease rapidly, causing the UNLOCK indicator to light.

General commentary

The front panel of the receiver is generally well laid out, not cramped, and all markings and indicators are easily read when the receiver is in use. Accessibility of the controls is very good with the exception of the 'fine' tune knob which, to this reviewer, seems to be located too close to and on the wrong side of the main tuning knob.

The preselector tuning control operates very smoothly over the whole range. It is band switched in four ranges, each range being indicated by a colour-coded indicator related to the pre-selector dial. This is an excellent idea, enabling one to see what one's doing at a glance.

The main tuning control is a little fast for comfort for SSB tuning and a little more reduction ratio would improve matters greatly. This was a problem with the FRG-7 too. Band-scanning ability would not be compromised greatly if the reduction ratio were improved. The fine tune control has too great a range, it was felt, further exacerbating the problem of tuning SSB signals. However, the necessary 'skill' is easily acquired.

An attenuator may be switched in to reduce possible overload problems from strong signals and is a very handy addition — more general coverage receivers available could do with one. It provides 20 dB of attenuation, which is just about right in our experience. We only found occasion to use it when listening on the most popular amateur bands and the CB band; the receiver's performance handling strong signals certainly seems better than average.

The S-meter is easily seen and well lit and the digital display has good visibility. The latter is a decided advantage in a general coverage receiver, although the addition of an analogue dial of some sort would improve 'seeing at a glance' where you're tuned and gives a better 'feel' to a receiver's operation. However, that's probably a matter of personal preference.

It entirely escapes us why Yaesu put an on/off switch on the digital display. Can anyone enlighten us?

Separate Filters

The incorporation of separate filters for SSB and AM is a great improvement over the FRG-7. Selectivity of the FRG-7 (and its counterparts) was not all that could be desired and the FRG-7000 has excellent selectivity characteristics, particularly for SSB reception. It may prove a little 'sharp' for some tastes, particularly SWling on the AM mode where you may wish to listen to station programs including music, but we found it not unpleasant. Adjacent channel

'monkey chatter' is greatly reduced so what you lose on the swings you pick up on the roundabout.

We note that a crystal-locked BFO is employed, with separate crystals for upper and lower sideband. This certainly aids SSB reception and stability is excellent, allowing an SSB signal to remain resolved for very long periods without requiring the operator to adjust the fine tune control.

Audio quality is quite good, particularly considering the small speaker used. The balance is 'even' with enough 'lows' to provide a smooth sound. However, an external speaker of good quality will markedly improve matters.

The tone control operates smoothly and proves useful on occasion. The volume control is smooth in operation without sudden increases in volume apparent across its range.

The FRG-7000 could well do with the addition of a noise blanker, especially at its price. This inclusion would top off an otherwise high performance receiver. We find the omission baffling as Yaesu's 'standard' noise blanker, as used in their amateur transceivers, performs well in our experience and would be a significant fillip to the receiver's overall performance and operation.

Technical report

Sensitivity of the FRG-7000 is very good, exceeding the manufacturer's specification except for the SSB mode at 950 kHz where our measurement indicated it was marginally worse. Curiously, the sensitivity improved at the higher frequencies. Evidently the noise figure degrades across the lower frequency range.

Overall, the sensitivity is more than adequate for the majority of situations in which the receiver will be used.

Selectivity is considered excellent, particularly on SSB, and generally is better than the specification.

The stability was measured from a cold start over a one hour, forty-two minute period. Initial drift was 700 Hz over the first 72 minutes and only 340 Hz in the final 30 minutes. Digital dial accuracy was good, any error being less than the final digit (1 kHz).

Crossmodulation and overload performance, while naturally not up to 'top shelf' standards, was nonetheless good and we found few difficulties in practice — nothing that the attenuator couldn't cope with in any case.

We thought AGC performance could be better, but in any case it seems superior to many general coverage receivers around in our experience. The S-meter could only be described as generous! Yaesu equipment usually

Fig. 2. The front end of the FRG-7000.

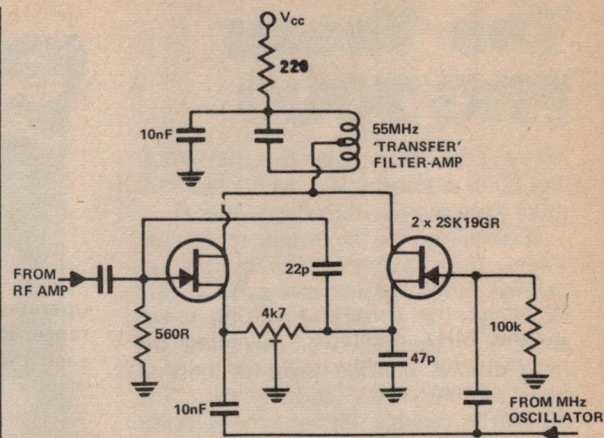
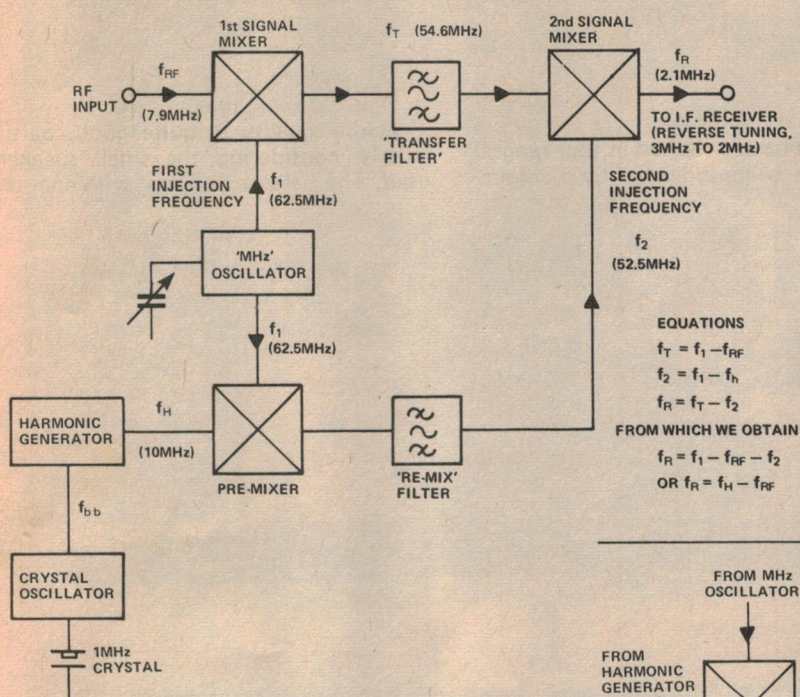


Fig. 4. The first signal mixer uses an unusual configuration of two JFETs.

Fig. 1. Basic Wadley-loop circuit.

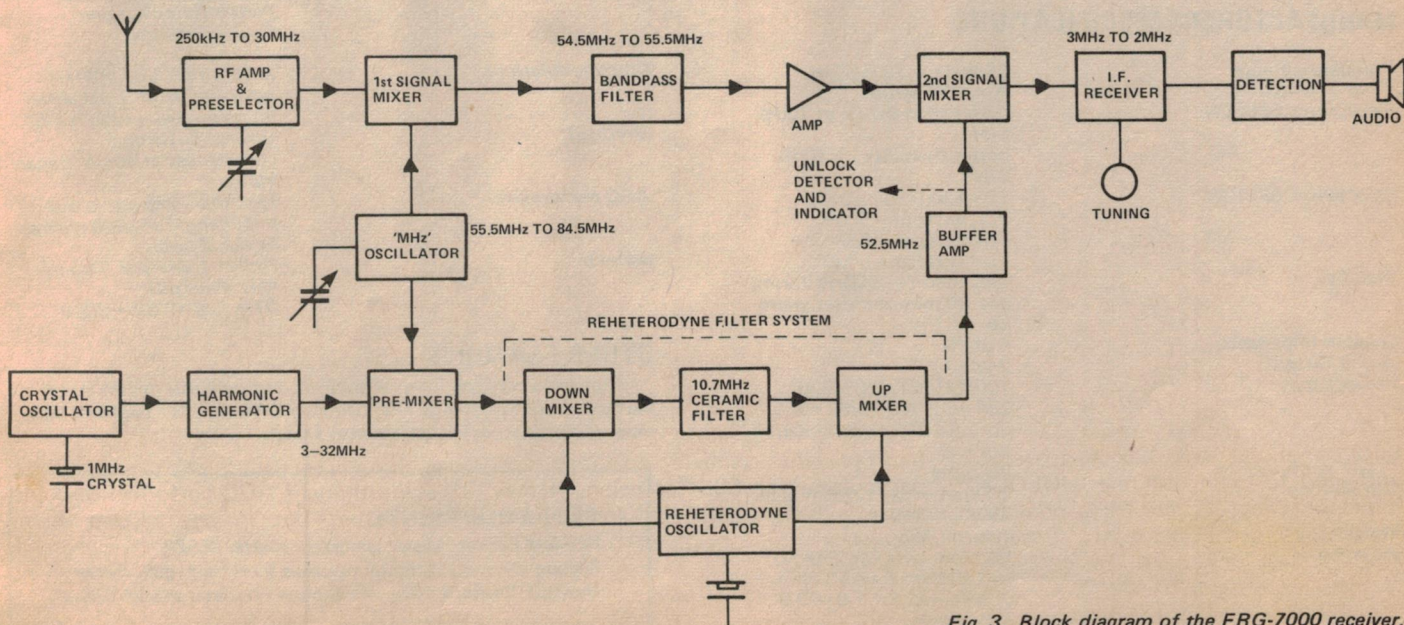
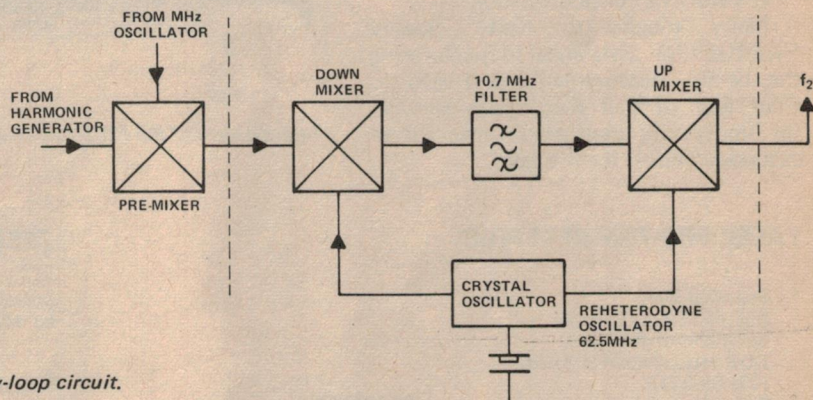


Fig. 3. Block diagram of the FRG-7000 receiver.

The Yaesu FRG 7000

has 'scotch' meters and the FRG-7000 was quite a surprise. We wondered why there were so many S9 signals about!

Examining the circuitry, it appears Yaesu have taken some trouble to provide good performance. Dual-gate FETs are employed in critical RF amplifier stages and two JFETs are used in an unusual configuration for the first signal mixer (see figure 4). The 3-2 MHz tunable IF receiver is fairly conventional.


General construction is up to the usual Yaesu standard.

Summary

Overall, we'd consider the Yaesu FRG-7000 a top performer in its general class. It's a pleasure to operate (with the minor exceptions mentioned), whether used for general listening or serious DXing.

It's worth a considered look.

Many thanks to Keith Gooley VK2BGZ for assistance in performing the bench measurements and also to Fred Bail of Bail Electronics Services for kindly supplying the receiver for an extended period for the test.

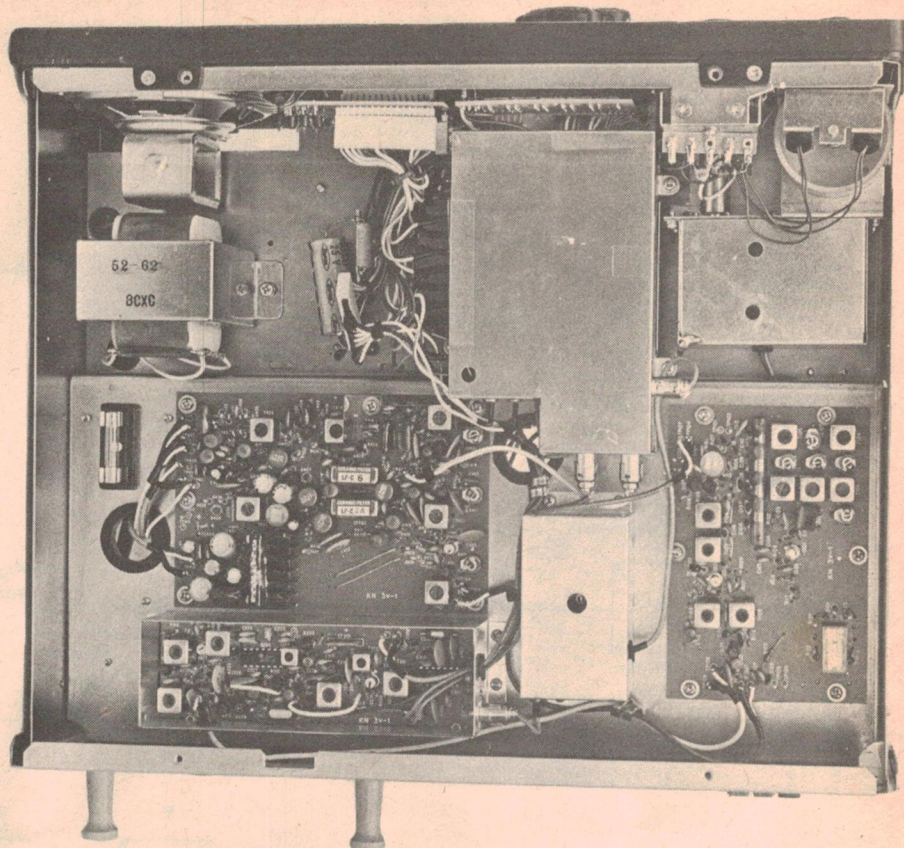

Internal view of the FRG-7000 receiver. Construction is up to Yaesu's usual high standard.

YAESU FRG-7000 RECEIVER

- * Supplied by:
Bail Electronic Services
60 Shannon St.,
BOX HILL NORTH 3129
(03) 89-2213
- * Serial No.: 8G020005
- * Recommended Price: \$695.00

MANUFACTURERS SPECIFICATIONS

Frequency Range	250kHz — 29.9 MHz
Type of emissions	AM, SSB (USB), CW
Sensitivity: SSB/CW	better than 0.7µV at 10dB S/N
AM	better than 2µV at 10dB S/N
Selectivity: SSB/CW	+/- 1.5kHz at -6dB; +/- 4kHz at -50dB
AM	+/- 3kHz at -6dB; +/- 7kHz at -50dB
Stability	Less than +/- 500Hz during any 30 minutes after warm up
Speaker impedance	4 ohms
Audio Output	2 watts
Power supply	100/110/117/200/220/234 volts AC 50/60 Hz optional 12Vdc external/ internal
Power consumption	25 watts
Dimensions	360mm wide, 125mm high 295mm deep.
Weight	Approx 7kg
Antenna	Random wire for 250kHz to 1.6MHz range 50 ohm unbalanced for 1.6—29.9 MHz range.

TEST REPORT

Sensitivity:	950kHz (at 10dB SINAD) 14.95MHz 29.95MHz	AM: 1.8µV SSB: 0.8µV AM: 1.2µV SSB: 0.22µV AM: 0.54µV SSB: 0.16µV
Selectivity:	at -6dB at -50dB	AM: +/- 3.5kHz SSB: +/- 1.1kHz AM: +/- 5.9kHz SSB: +/- 2kHz
Stability:		340 Hz over 30 minute period following one hour's warmup.
Crossmodulation:		A 200mV signal 50kHz separated from 1µV signal increases audio output 6dB. Output distortion commences at 45mV signal input.
Overload:		Less than 6dB audio output change for 70dB change in signal level.
AGC performance:		About 1.3dB per S-point; very generous!
S-meter		S1 = 2.5µV; S9 = 30µV

OTHER FEATURES

Fine tune control, internal speaker, optional internal/external battery operation, digital clock/time with local/GMT readout, tape recorder output socket, attenuator switch.

TEST EQUIPMENT:

Hewlett Packard signal generator model 8558B
Frequency meter: digital counter in HP sig. gen. above.
Hewlett Packard noise and distortion meter model 334A.

ADVANCED COMPUTER PRODUCTS

\$100 PRODUCTS

LOGOS I 8K STATIC RAM

- ★ Low Power
- ★ Selectable Memory Protect
- ★ Totally Buffered
- ★ Battery Back-up
- ★ Address on 1K boundary
- ★ Requires no front panel
- ★ No wait states

ASSEMBLED & TESTED

250ns. 199.95
450ns. 179.95

KIT

250ns. 149.95
450ns. 125.95

Bare PC Board w/Data

\$21.95

Now over 1 year successful field experience
"Special Offer" Buy (4) 8K 450ns. Kits \$117.00 ea.

IMS 16K STATIC RAM

- ★ Memory mapping
- ★ Phantom
- ★ Address 16K Bound
- ★ Use with or w/o front panel
- ★ Power 2.1 amps typ.
- ★ Uses 2114

ASSEMBLED & TESTED ONLY
450ns. \$439.95 250ns. \$495.95

S-100 32K STATIC RAM

- ★ Address 32K Boundary
- ★ Power 450ns. 2.8 amps typ.
- ★ No wait states on 2MHz
- ★ Fully Buffered
- ★ Phantom can be added
- ★ 2114/TMS4045 or 9135

ASSEMBLED & TESTED KIT
250ns. \$849.00 250ns. \$790.00
450ns. \$769.95 450ns. \$625.00

Bare PC Board w/Data \$59.95
SPECIAL OFFER:
Kit without Memory only \$99.95.
Add 2114 Memory for 8 @ \$7.50 ea.

PARATRONICS LOGIC ANALYZER KIT

MODEL 100A \$219.95
(analyzes any type of digital system)

Trigger Expander Model 10... \$229.00
Baseplate... 9.95

Model 10 Manual... 4.95
Model 150 Bus Grabber Kit... 369.00

DC HAYES DATA COMMUNICATIONS ADAPTER

- ★ Telephone/TWX ★ S-100 compatible
- ★ Bell 103 freq. ★ Originate & answer mode

Assembled & Tested \$279.95
Bare PC Board w/data \$49.95

DATABOOKS & MANUALS

NSC TTL Data... 3.95
NSC Linear Data... 3.95
NSC Linear APP/Note I... 3.95
NSC CMOS Data... 3.95
NSC Audio Data... 3.95
NSC Vorr Reg. Data... 3.95
NSC Memory Data... 3.95
NSC MOS/LSI Data... 3.95
Intel Power Transistors... 2.95
Intel Databook... 3.95
Intel MCS85 Manual... 7.50
Intel MCS80 Manual... 7.50
Intel MCS40 Manual... 4.95
AMD 6800 Handbook... 5.95
AMD Linear Data... 4.95
AMD Schottky Data... 4.95

6800 DESIGNER BOARDS

MODULES PROTO BOARDS

★ Motorola Compatible Modules*
MEK 6800 D2 Kit \$235.00
9600 6800 MPU Module 495.00
9601 16 slot Mother Bd. 175.00
9602 16 slot Card Cage 75.00
9603 8 slot Mother Bd. 99.00
9604 System Power Supply 250.00
9610 Prototype Board 36.00
9615 4KEPROM Module 250.00
9620 16 port parallel I/O 375.00
9626 8K Static RAM 295.00
9626K 8K Static RAM Kit 225.00
9630 Extender Card 60.00
9640 Multiple Tuner Prog. 395.00
9650 8 port Duplex Asyn. I/O 395.00
Mot 43/86 Connectors w/w or s/t 5.95
AMI EVK 99 6800 sub Kit 99.00
AMI EVK 200 Kit 249.95
AMI EVK 300 Assembled 275.00

Z-80/Z-80A CPU BOARD

- ★ On board 2708
- ★ Power on jump
- ★ 2708 included (450ns.)
- ★ completely socketed
- Assembled and tested \$185.00
Kit \$129.95
Bare PC Board \$34.95

★ For 4MHz Speed Add \$15.00

MICRODESIGN MR-16 2716 EPROM BOARD (MR-8 Also Available at same price)

- ★ Individual Prom Address
- ★ Uses Low cost 16K TI EPROMS
- ★ Optional 1K RAM ★ Phantom-control
- Assembled and Tested 174.95
Kit 99.50

SPECIAL SPECIAL SPECIAL

2708-6 Eprom... 8 @ \$ 5.50 ea.
416 16K Ram... 32 @ \$16.95 ea.
1771-01 Floppy... 5 @ \$25.95 ea.
Pet Connector Set... 5 @ \$ 7.95 ea.

BYTE USER 8K EPROM BOARD

- ★ Power on Jump ★ Reset Jump
- Assembled & Tested 94.95
Kit 64.95
Bare PC Board 21.95

Special Offer: Buy 4 kits only \$59.95 each
NOTE: 2708-6 only \$5.95

TARBELL FLOPPY INTERFACE

- ★ S100 Compatible ★ Uses CPM
- ★ Jumper Selectable ★ Persci, Shugart, etc
- Assembled and tested \$269.95
Kit \$179.95
Bare PC Board \$39.95

NOTE: For CPM Add \$70.00
Documentation Add \$20.00

TRS 80 UPGRADE KIT

- 16K Memory with Jumpers and Instructions \$159.95
(Specify Level I or Level II)
- APPLE II 16K UPGRADE KIT \$149.95

PET to S-100 ADAPTER

- Allows Pet to be interfaced to popular S-100 Bus.
- Kit \$189.95
Assembled \$269.95

For Low Cost 8 Slot Bus to expand your Pet only... \$149.95 Kit

DISKETTES

5" MINI
1" 5/8" Mini Sector
★ 10 Sector
★ 16 Sector
\$4.50 each \$3.90/10
NORTH STAR MINI
\$4.95 each \$4.50/10
8" STANDARD
★ Hard
★ Soft
\$4.50 each \$4.10/10

EVK Kube Board

EVK 16K Byte Ram Board 75.00
EVK 6 Slot Motherboard 35.00
EVK Extender Board 45.00
EVK Solid Frame Chassis 129.00
EVK Connectors 6.50
AMI 6800 Proto Rom 30.00
AMI 6800 Micro Assembler Rom 30.00
6800 Tiny Basic Paper Tape 20.00
6800 Tiny Basic Eprom 125.00

Hi PLOT LOW COST DIGITAL PLOTTER

- ★ RS 232
- ★ Plot Size 7" x 10" NEW List: \$1085.00
- ★ Digitizer Avail. Soon
- ★ High Resolution
- ★ 2.4"/sec Plot Speed OUR PRICE \$999.00

SPECIAL KEYBOARD BUY WHILE THEY LAST

"Clare Pender 62 Key ASCII" w/26 Pin & 34 Pin Out Conn... \$54.95

THE FIRST TO OFFER PRIME PRODUCTS TO THE HOBBYIST AT FAIR PRICES NOW LOWERS PRICES EVEN FURTHER!

- 1. Proven Quality** Factory tested products only, no re-tests or fallouts. Guaranteed money back. We stand behind our products.
- 2. Same Day Shipment** All prepaid orders with cashiers check, money order or charge card will be shipped same day as received.

SUPPORT DEVICES

AM9511 Arith. Processor... \$195.00
AM9517 DMA Controller... 71.95
AM9519 Universal Interrupt... 34.95
3881 (Z80 PIO)... 10.45
3881-4 (4MHz)... 14.95
3882 (Z80 CTO)... 10.45
3882-4 (4MHz)... 14.95
8212 8 bit IO... 2.50
8214 Priority Int... 6.95
8216 Bus Driver... 2.50
8224 Clock Gen... 2.95
8224-4 (4MHz)... 9.75
8226 Bus Driver... 2.50
8228 Sys. Driver... 2.50
8228 Sys. Control... 6.95
8238 Sys. Control... 1.95
8251 Prog. IO... 11.50
8253 Int. Timer... 19.50
8255 Prog. IO... 11.50
8257 Prog. DMA... 19.50
8259 Prog. Int... 19.50
8275 CRT Controller... 74.95
8279 Prog. Keyboard... 19.50
6810-1 128 x 8 RAM... 4.75
6800 PIA... 1.95
6821 PIA... 7.25
6826 Priority Int... 11.95
6834-1 512 x 8 EProm... 12.95
6850 ACIA... 7.20
6852 Serial Adapter... 14.50
6845/HD4650S CRT Contr... 39.95
6860 Memory... 14.50
6144 Dual In-Line... 2.95
6871 1.0MHz OSC... 25.95
6875... 6.25
20/100 I/O W/W... 4.75
6880 Bus Driver... 2.39
1821 SCD 1K RAM... 25.00
1828 CD 10... 16.95
1824 CD 32 x 8 RAM... 9.95
1852 CD 10... 9.95
1857 CD IO... 8.95
6520 PIA... 7.50
6522 Mult... 9.95
6530-002... 15.50
6530-003... 15.50
6530-004... 15.50
6530-005... 15.50
3851 14 Pin Prog. Store... 14.95
3853 14 Pin Prog. Store... 14.95

PROMS

2708... 9.95
2708-6... 5.95
1702A... 3.95
2718-5V... 44.95
2718-5V, 12V... 24.95
2718-5V... 25.95
5203AQ... 11.95
5204AQ... 9.95
5206... 12.95
IM 5610... 2.95
825123... 2.95
825126... 4.50
825129... 1.95

RAMS DYN.

4116 16K x 1... 17.95
4116 8K x 1... 10.95
4050 4K x 1... 4.45
4060 4K x 1... 4.45
4096 4K x 1... 4.45
2104 4K x 1... 4.95
2107B 4K x 1... 4.25
5261... 1.95
5262... 1.95
5270... 4.95
5276... 4.95
1103... 1.95
8K Static Logic... 21.95
8K EPROM Bytestore... 21.95
32 State S-100... 25.95
TARTELL FLOPPY I/O... 39.95
TARTELL Cassette... 29.95
TARTELL 8000 PIA... 19.95
ACP Proto Bd... 27.95
ACP Extender w/conn... 15.95
Realtime Clock... 34.95
WMC 13 Slot Mother Bd... 33.00
S-100 8 Slot Mother Bd... 34.95
Vector 8803 11 Slot M. Bd... 29.95
SSM Video I/O... 27.95
SSM I/O Parallel I/O... 27.95

FLOPPY DISK I/O

1771-01 8" & 5 1/4" Floppy... 27.95
UPD8172 Nec Floppy... 49.95
1781 Dual Floppy... 39.95

CHARACTER GENERATORS

RO3251-001 (SV) Upper... 9.50
RO3251-002 (SV) Lower... 10.95
RO3251-003 (SV) Lower... 10.95
MCM6571... 10.75
MCM6571A... 10.75
MCM6571... 14.50
MCM6575... 14.50

KEYBOARD ENCODERS

AT5-2376... 13.75
AT5-3800... 13.75

UARTS/USRTS

TR1602B (SV, 12V)... 3.95
AT5101 (SV, 12V)... 5.50
AT5101A/1612 (5-14V)... 6.95
AT5101A/1612 (SV)... 6.95
TMS 6011 (SV, 12V)... 5.50
IM6403... 1.95
IM6403... 9.95
2500 USRT... 9.95
1871B Astrom... 24.95

SALE TR1472B... 9.95

BAUD RATE GENERATORS

MC1441... 11.25
4702... 14.95
WD1941... 9.95

TV CHIPS

MM5369 TV Synch... 7.95
MM5369 Prescaler... 3.95
LM1589 Modulator... 1.50
CW2021 Saw Function... 1.50
MM5170 Color TV Game... 6.95
MM5170 Color TV Game... 6.95
AT3850-1 TV Game... 5.95
AT3860 Color TV Game... 24.95
AT3861 Color TV Game... 8.95
AT3870-1 Tank Chip... 29.95
RF Modulator with Audio... 8.95

A/D CONVERTERS

8701 8 bit Binary... 13.50
8701 10 bit Binary... 22.00
8702 12 bit Binary... 36.95
8703 12 bit TS... 42.95
9400 Volt to Freq. Conv... 7.25
8750 3-1/2 Digit BCD... 13.95
8750 Multifunction... 3.95
1408L6 6 bit... 3.95
1408L8 8 bit... 3.95
DAC01 A/D Converter... 8.95

TV INTERFACES

Pix-Video Interface... 8.50
Tri-Video Interface... 8.95
Pikes to Triout TV Mod. Kit... 35.00
Multiverter... 35.00
M8R Modulator... 35.00

MICROPROCESSORS

Z-80... \$19.95
2801... 26.95
Z-80A... 26.95
2650... 24.95
CD1802... 9.95
8028A... 9.95
SALE 8085... 18.95
8008-1... 21.95
2801... 26.95
2901A... 26.95
TMS 9900UL... 69.95
CP1600... 39.95
8502... 13.95
8502... 29.95
6800... 19.95
6802... 32.95
8085... 17.50

SOCKETS

8 Pin WW... 32
8 Pin S/T... 17
16 Pin WW... 37
16 Pin S/T... 22
18 Pin WW... 30
20 Pin S/T... 34
22 Pin WW... 35
24 Pin WW... 85
24 Pin S/T... 41
40 Pin WW... 145
40 Pin S/T... 63

CONNECTORS

6 Pin Single S/E... 1.49
10 Pin D Subminiature... 3.25
DB25... 3.75
Hood... 1.25
Set w/Hood... 6.50

NEW CTS DIPSWITCHES

CTS206-4 \$1.75 CTS206-8 \$1.95
CTS209-4 \$1.75 CTS209-8 \$1.95
CTS207-7 \$1.75

8080 USER'S IT'S HERE

LIVERMORE BASIC

ON 65K ROM THAT'S RIGHT ON ROM!

OUR PRICE only \$95.00

PCB PROGRAMMABLE CHARACTER GENERATOR

The hottest version of STARWARS available
16K Compatible 2MHz Kit with coded code on tarbell or cuts... \$169.95

NAKED PC BOARD SALE S-100

Z-80 CPU (ITHACA)... 34.95
Z-80 CPU (TLC comp.)... 34.95
8080A CPU... 34.95
8K Static Logic... 21.95
8K EPROM Bytestore... 21.95
32 State S-100... 25.95
TARTELL FLOPPY I/O... 39.95
TARTELL Cassette... 29.95
TARTELL 8000 PIA... 19.95
ACP Proto Bd... 27.95
ACP Extender w/conn... 15.95
Realtime Clock... 34.95
WMC 13 Slot Mother Bd... 33.00
S-100 8 Slot Mother Bd... 34.95
Vector 8803 11 Slot M. Bd... 29.95
SSM Video I/O... 27.95
SSM I/O Parallel I/O... 27.95

UV "Eprom" Eraser

Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95
Model Uvo-11E... \$64.95

ATTENTION KIM USERS

KIM-1 Expansion to S-100... 125.00
KIM-1 to S-100 Converter... 5.50
KIM-1 1600 Single Board Computer... 445.00
KIM-1 Power Supply... 29.95
KIM-1 Memory Exp. - consists of 8K Ram, 8K EPROM, Program. (C02L)... 245.00
KIM-1 512K RAM... 16.95
KIM-1 1M RAM... 16.95
KIM-1 2M RAM... 16.95
KIM-1 4M RAM... 16.95
KIM-1 8M RAM... 16.95
KIM-1 16M RAM... 16.95
KIM-1 32M RAM... 16.95
KIM-1 64M RAM... 16.95
KIM-1 128M RAM... 16.95
KIM-1 256M RAM... 16.95
KIM-1 512M RAM... 16.95
KIM-1 1024M RAM... 16.95
KIM-1 2048M RAM... 16.95
KIM-1 4096M RAM... 16.95
KIM-1 8192M RAM... 16.95
KIM-1 16384M RAM... 16.95
KIM-1 32768M RAM... 16.95
KIM-1 65536M RAM... 16.95
KIM-1 131072M RAM... 16.95
KIM-1 262144M RAM... 16.95
KIM-1 524288M RAM... 16.95
KIM-1 1048576M RAM... 16.95
KIM-1 2097152M RAM... 16.95
KIM-1 4194304M RAM... 16.95
KIM-1 8388608M RAM... 16.95
KIM-1 16777216M RAM... 16.95
KIM-1 33554432M RAM... 16.95
KIM-1 67108864M RAM... 16.95
KIM-1 134217728M RAM... 16.95
KIM-1 268435456M RAM... 16.95
KIM-1 536870912M RAM... 16.95
KIM-1 1073741824M RAM... 16.95
KIM-1 2147483648M RAM... 16.95
KIM-1 4294967296M RAM... 16.95
KIM-1 8589934592M RAM... 16.95
KIM-1 17179869184M RAM... 16.95
KIM-1 34359738368M RAM... 16.95
KIM-1 68719476736M RAM... 16.95
KIM-1 137438953472M RAM... 16.95
KIM-1 274877906944M RAM... 16.95
KIM-1 549755813888M RAM... 16.95
KIM-1 1099511627776M RAM... 16.95
KIM-1 2199023255552M RAM... 16.95
KIM-1 4398046511104M RAM... 16.95
KIM-1 8796093022208M RAM... 16.95
KIM-1 17592186044416M RAM... 16.95
KIM-1 35184372088832M RAM... 16.95
KIM-1 70368744177664M RAM... 16.95
KIM-1 140737488355328M RAM... 16.95
KIM-1 281474976710656M RAM... 16.95
KIM-1 562949953421312M RAM... 16.95
KIM-1 1125899906842624M RAM... 16.95
KIM-1 2251799813685248M RAM... 16.95
KIM-1 4503599627370496M RAM... 16.95
KIM-1 9007199254740992M RAM... 16.95
KIM-1 18014398509481984M RAM... 16.95
KIM-1 36028797018963968M RAM... 16.95
KIM-1 72057594037927936M RAM... 16.95
KIM-1 144115188075855872M RAM... 16.95
KIM-1 288230376151711744M RAM... 16.95
KIM-1 576460752303423488M RAM... 16.95
KIM-1 1152921504606846976M RAM... 16.95
KIM-1 2305843009213693952M RAM... 16.95
KIM-1 4611686018427387904M RAM... 16.95
KIM-1 9223372036854775808M RAM... 16.95
KIM-1 18446744073709551616M RAM... 16.95
KIM-1 36893488147419103232M RAM... 16.95
KIM-1 73786976294838206464M RAM... 16.95
KIM-1 147573952589676412928M RAM... 16.95
KIM-1 295147905179352825856M RAM... 16.95
KIM-1 590295810358705651712M RAM... 16.95
KIM-1 1180591620717411303424M RAM... 16.95
KIM-1 2361183241434822606848M RAM... 16.95
KIM-1 4722366482869645213696M RAM... 16.95
KIM-1 9444732965739290427392M RAM... 16.95
KIM-1 18889465931478580854784M RAM... 16.95
KIM-1 37778931862957161709568M RAM... 16.95
KIM-1 75557863725914323419136M RAM... 16.95
KIM-1 151115727451828646838272M RAM... 16.95
KIM-1 302231454903657293676544M RAM... 16.95
KIM-1 604462909807314587353088M RAM... 16.95
KIM-1 1208925819614629174706176M RAM... 16.95
KIM-1 2417851639229258349412352M RAM... 16.95
KIM-1 4835703278458516698824704M RAM... 16.95
KIM-1 9671406556917033397649408M RAM... 16.95
KIM-1 19342813113834066795298816M RAM... 16.95
KIM-1 38685626227668133590597632M RAM... 16.95
KIM-1 77371252455336267181195264M RAM... 16.95
KIM-1 15474250491067253436239552M RAM... 16.95
KIM-1 3094850098213450687247910



SUPERB KITS from DENMARK

Additional high quality kits coming soon!

JOSTYKIT is Europe's leading manufacturer of electronic kits featuring attractively styled boxes of Scandinavian design and high quality electronic components which will satisfy the most demanding kit builder.

JOSTYKIT's staff of qualified electronic engineers and educationalists supply up-to-the-minute, reliable electronic kits, designed around space-age solid state technology, but capable of construction without any great technical know-how or practical experience.

The JOSTYKIT instruction booklets supplied with each kit give clear, precise directions for assembly and testing. For those with special technical interests, each instruction booklet ends up by describing how the kit works. You'll always learn something when you construct a kit from JOSTYKIT.

Audio

AF300 AUDIO AMPLIFIER - 3 WATTS

A real work-horse, this universal power amp has a wide range of applications such as car radio, record players and small receivers. Due to its well designed electronic circuit, the AF300 can be used over wide voltage ranges without deterioration of the specification parameters.

Kit AF300. \$25.00

AF340 40 WATT AUDIO AMPLIFIER MODULE

High quality 20-20,000 Hz, 37w RMS with low distortion.

Kit AF340. \$35.00

FM Tuners

HF325-2 QUALITY FM TUNER MODULE

The HF325 is a complete high quality FM tuner of professional standing. The tuner unit is ready-made and pretrimmed, making it child's play to assemble. Tuning range 88-108 MHz, operating voltage 12-55v ac.

Kit HF325. \$79.00

Stereo decoder HF310. \$24.00

HF310 FM RECEIVER

The HF310 is a very reasonably priced HF FM tuner. Fully trimmed, the sensitivity according to IHF standards is better than 10uV. Features 60 dB S/N ratio and low harmonic distortion.

Kit HF310. \$49.00

HF330 STEREO DECODER

Gives 40-45 dB channel separation, just add to a good quality FM receiver.

Kit HF330. \$24.00

Pre-amps (RF)

HF395 RF PREAMPLIFIER

Gain 30 dB to 20 MHz, 10 dB to 100 MHz and 5 dB to 225 MHz. Ideal to boost reception on short-wave receivers.

Kit HF395. \$6.00

HF385 VHF/UHF ANTENNA PREAMP

Superb quality with two aerial inputs and one down lead which simultaneously supplies current from the power supply. Frequency range 40-250 MHz and 400-820 MHz. Gain 9-18 dB, depending on frequency.

Kit 385. \$30.00

Box B850. \$6.00

Optional Power Supply NT410. \$20.00

Quick assembly kits

JK01 GENERAL PURPOSE AMP 0.5w. \$18.00

JK02 MICROPHONE AMPLIFIER \$19.00

JK03 SINE WAVE GENERATOR 20-20,000 Hz \$30.00

JK04 FM TUNER 88-108 MHz \$30.00

JK05 27 MHz RECEIVER \$33.00

JK06 27 MHz TRANSMITTER \$29.00

JK07 DUAL TONE DECODER FOR R/C MODELS \$43.00

JK08 240 Vac LIGHT OPERATED RELAY \$20.00

JK09 SIREN KIT inc. SPEAKER \$19.00

JK10 PHOTOGRAPHIC TIMBER 240 Vac. \$23.00

JK101 BURGLAR ALARM KIT \$55.00

Light Shows

AT465 LIGHT SHOW

Turn your music into light. Simply connect this 3 channel light show to the audio terminals of your amplifier and this quality kit does the rest for you!

Kit AT465. \$64.00

Attractive box and knobs B6065 \$25.00

AT468 4 CHANNEL LIGHT SHOW

This superb kit drives 4 lights (400w per channel) from the audio amplifier output.

Kit AT468. \$75.00

Attractive box and knobs B3265 \$48.00

AT365 LIGHT SHOW

This quality kit uses microphone input instead of connection to the audio output. 1500w max.

Kit AT365. \$69.00

Box and knobs B3265 \$48.00

FM Transmitter

HF65 FM TRANSMITTER 60-148 MHz

Will run 5w output with heat sink. Ideal for signal testing or for a miniature transmitter which could be received on a standard FM receiver.

Kit HF65. \$9.00

Ham Converter

HF305 AMATEUR BAND 2m CONVERTER

Converts 2m FM down to the FM band 88-108 MHz.

Kit HF305. \$28.00

AM Receiver

HF61 MEDIUM WAVE RECEIVER

540-1600 KHz receiver complete with ferrite coil antenna.

Kit HF61. \$19.00

Power Supplies

NT415 LAB POWER SUPPLY 0-30V

1 amp well-regulated supply for professional use. Complete with box and transformer.

Kit NT415. \$128.00

NT300 LABORATORY POWER SUPPLY 2-30V

High quality supply, regulated 2-30V dc at 2 amps with overload protection. Complete with box and transformer.

Kit NT300. \$110.00

AT320 ALL ROUND AC/DC REGULATOR

This kit is a control unit with almost incredible possibilities. Use it as a touch control, burglar alarm, timer, heat/cold regulator. Power supply is built-in.

Kit 320 \$54.00

high quality

N.S.W.: Custom Communications, Orchardleigh Street, Yennora.
S.A.: International Communications Systems, 77 Dale Street, Port Adelaide.
Vic.: Eastern Communications, 898 Riversale Road, Camberwell.

NEW KITS

MAIL ORDERS
enclose \$1
for P & P

to

Dealers being appointed in all areas

Distributed by:

VICOM

68 EASTERN RD,
SOUTH MELBOURNE, VIC. 3205.
PH (03) 699.6700



Amateur News

New Atlas Dealer

G.F.S. Electronic Imports, Greg Whiter Esq. proprietor, informs us that he is now an Atlas distributor.

If you're after some of that you-beaut Atlas gear — compact, high performance (210x/215x etc), then he's the man to see. Give him a bell on the six hundred some time: G.F.S. Electronic Imports, 15 McKeon Road, Mitcham 3132 (03) 873 3939.

Russian Satellites

The Russian satellites showed their face for about a week around early November last — but we've heard nothing of them since.

There are two of them, RS1 and RS2, and both travel in polar orbits, similar to the Oscar series — but in the opposite direction. Evening passes run from North to South, RS2 running roughly 20 minutes ahead of RS1.

The 29.4 MHz (29.4012) is very strong — has anyone copied the 435.105 MHz beacon?

Maximum input to the transponder is requested to be limited to 10 watts ERP.

Channels 0 & 5A — a win!

Senator David Jull, Liberal member for Bowman (QLD), presented good news to the gathering throng at the Queensland WIA Division's convention last October.

He said, "The decision for channel 5A to be used in metropolitan areas has been completely shelved and won't happen.

"Furthermore, an investigation is now under way by the Department to eliminate those areas that are using channel 5A for translator facilities in some sountry areas".

He gave the WIA considerable encouragement when he acknowledged their important role in the battle to curtail channel 5A allocations.

"I believe that if it had not been for pressure of members of your association throughout Australia the decision to go ahead which channel 5A would have gone ahead and we would have been in all sorts of troubles and got ourselves into a ridiculous situation, certainly internationally.

"The power of the people is something that is often debated . . . in Parliament House. It is very easy to get yourself cut off from the outside world.

"Consequently, we found out from the Institute's members of the very real concern that you were having about the possibility of channel 5A being used.

"... (members) formed themselves

into a very satisfactory and hard hitting lobby group".

Further on his speech, Mr Jull, commenting on the channel 0 allocation said that the original idea was to transfer channel 0 stations in Melbourne and Brisbane to channel 10. However, this was likely to cause problems in areas like Traralgon in eastern Victoria and Toowoomba, west of Brisbane, in Queensland. Channel 5A was then seen as a very real alternative.

On October 11 it was (quietly) announced that Channel 0 Melbourne was moving to channel 10 as soon as possible (Hurray — VK3s again proliferate on 6m!).

Mr Jull, ironically a one-time employee of Channel 0 Brisbane we are told, said, "I should think a similar announcement will be made in Brisbane about the fate of Universal Telecasters" (holders of the channel 0 Brisbane licence).

During question time following his address, Mr Jull said that the moving of channel 0 indicated to him that Australian amateurs may be able to return to the 50 MHz portion of the international six metre band allocation.

He further indicated that the Special Broadcasting Service would not take up the channel 0 allocations, either.

Well, it seems like a reasonably satisfying 90% win for amateurs, and the others affected by the 'strange' 0 and 5A allocations.

Next move is to get channels 5A and 0 deleted altogether . . . followed by moving all the TV channels to UHF, releasing the most useful (and presently most wasted) part of the spectrum to those services who can make good use of it.

Dxpediton to Mellish Reef

Prime mover of last year's Mellish Reef DXpediton, Harry VK2BJL, has put it around the grapevine that another trip is in the offing — set for around September.

Learning from recent experience (!), this one should run a lot more efficiently and VK6ZR should once again bring dogpiles (and we mean that metaphorically) to the bands.

More long distance TEP

This time the Pacific has been spanned Japan-Argentina. Another first in 20 years or so. Late October, JA8 to LU3 and LU7, followed by LU9 to JA8 and JA7, JA1 as well as KG6!

Interestingly, Japan-Australia signals were worked as late as December 10 which is a pretty healthy seasonal

'spread'. If this sort of propagation follows the patterns experienced in past cycles then this year looks like being quite good with conditions improving over the next few years.

Articles of Note

It seems that the US Ham Radio magazine has an almost inexhaustable front of good, solid technical articles (I'm going to be accused of venality, partisanship, plagurism, payola-taking, graft and corruption — I can see it coming . . . courtesy of the marginal finking department). Their October 78 issue is worth a good look if you've missed it or passed it by (. . . how you can do that, I don't know).

The article on "A high frequency communications receiver" contains some quite ingenious circuitry — best bit being the digital switching of the RF oscillator and mixed tuned circuits.

Close on its heels is a "Low Noise 432 MHz preamplifier". Circuit and construction simplicity are the high points here, as well as the 0.8 dB noise figure! The NE64535 device used may be obtained in Australia by those with sufficient knowledge of contacts in the trade — a minor drawback. Usually, with such quasi-exotic devices, it's a case of 'if you want it, you can get it'.

For the UHF/SHF buffs there's an excellent article of practical bent on a "1296 MHz local oscillator" by the well-known Paul Wade, WA2ZZF. Readily-duplicated stripline pc board is employed with readily available active devices. Spectrum analyser 'pictures' of the output illustrating the oscillator chain's "cleanliness" are given in the article along with a discussion of the techniques used.

The reciprocating detector created a lot of interest back in the early '70s but work on this technique seems to have been at a low ebb in recent times. It surfaces again in the October Ham Radio in an article by Stirling Olberg, WISNN, titled "Second generation reciprocating detector". The article describes a detector that may be used with solid-state receivers with HF IF strips. Modern ICs are used and a pc board layout is given. A good one for the inveterate 'fiddlers'.

For the microwave enthusiasts an article on a new mixer technique, "Twin diode mixer" will be of interest. The technique described has a number of advantages: simplicity, very low local oscillator power requirements (−3 dBm) 6 dB noise figure, local oscillator frequency half that normally used, not

continued page 79




KENWOOD

PACESETTER IN
AMATEUR RADIO

TS-820 TS-520

**"The complete
amateur package"**

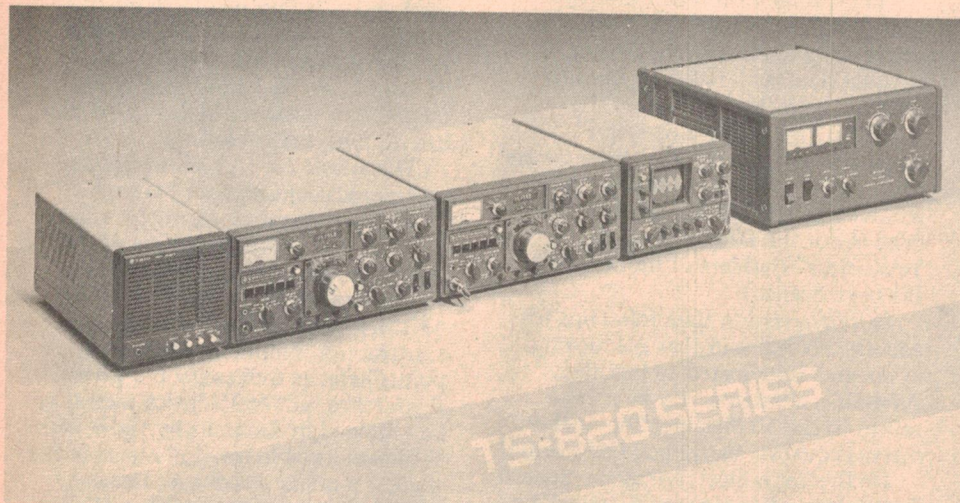

RECEIVER, R-820

\$1210

TRANSCEIVERS, TS-820S

\$1392

1.8 to 30 MHz. SSB-CW-FSK. Digital display

TS-820 \$1175

As above, less display

SPEAKER, SP-820 \$69

STATION MONITOR,

SM-220. \$430

LINEAR AMPLIFIER,

TL-922. \$1389

TRANSCEIVER, TS-520S,

\$885

1.8 to 30 MHz. SSB-CW

SPEAKER, SP-520. \$33

REMOTE VFO-520S. \$163

DIGITAL DISPLAY, DG-5,

\$259.

6M TRANSVERTOR,


TV-506. \$180

2M TRANSVERTOR,

TV-502S. \$213

ANTENNA TUNER,

AT-200. \$185.

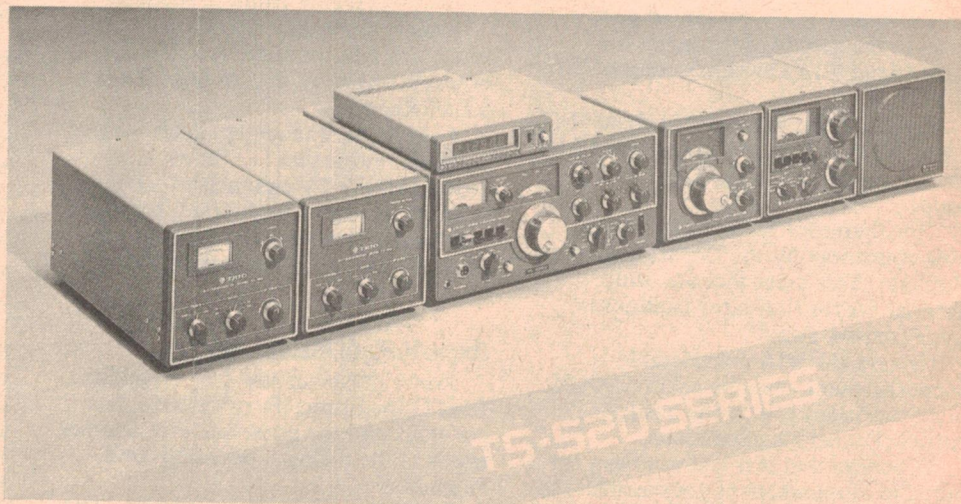

The Kenwood TS-520S is the most popular HF amateur transceiver on the market. What other brands offer such a line-up? Contact your local dealer now, as future shipments will be dearer

Distributed by:

TRIO-KENWOOD (AUSTRALIA) PTY. LTD.

31 Whiting Street, Artarmon, NSW. 2064. Tel: (02) 438-1277

Interstate Distributors:

VIC: Vicom Imports P/L, (03) 699-6700

QLD: Mitchell Radio Co, (07) 57-6830

SA/NT: International Communications Systems
(08) 47-3688

Plus regional retailers in all States

WA: Willis Trading Co, (09) 321-7600

TAS: Advance Electronics, (003) 31-5688

Amateur News

tuning, no dc return required and high isolation between all ports. As it can be used as an up-converter or a down-converter it would be of interest to those attempting to generate SSB on the SHF bands.

Whet your appetite? There's more.

VHF Auroral Propagation

THE AURORAL SCATTER excitement last August and September has generated an enormous amount of interest in the characteristics of this propagation mode and it would seem timely to detail a few of the known parameters.

Auroras are the visible result of charged particles entering the ionosphere and causing the rarified gasses to 'fluoresce' giving characteristic blue, green or red displays. The green colour is emitted by molecular oxygen while the blue and red colours are emitted by molecular nitrogen.

Auroras occur at heights ranging from around 100 km (95%) up to 800 + kilometres (rarely), measured to the well-defined lower edge of a display. This places the majority of auroras in the E-region of the ionosphere and propagation distances via auroral scatter will depend on the geometry involved according to the location of the display.

As auroras are a manifestation of heavy ionisation in the ionosphere it follows that radio wave reflections (or refractions (or refraction resulting in reflection or scattering) may occur without there being visible aurorae.

In fact, studies of auroral phenomena are carried out using 'auroral radar' which indicate many more auroral returns than visible aurorae.

Aurorae are most often seen (95% of the time) between the geomagnetic latitudes of 20° and 25° removed from the geomagnetic pole, although they may be seen as far south (geomagnetically speaking) as 85° and as far north as 45°. An auroral display was seen at a high angle over Sydney in 1957 — roughly 43° geomagnetic latitude.

Auroral displays appear to be seasonal, peaking roughly at the equinoxes (March 21, September 21) with a 'spread' through midwinter and a minimum during summer, although they can occur at any time. They are associated with strong magnetic storms that follow a solar flare. Auroral effects on propagation are generally observed most often during the afternoon through the evening.

During any single auroral event, the auroral displays are generally located near an 'auroral oval' (see fig. 1.) and

most generally occur on the night side of the oval that is farthest removed from the geomagnetic pole. When a large number of these displays are averaged the most common area of occurrence is in the 'auroral zone' which is roughly circular around the geomagnetic pole.

The frequency, geographical extension and intensity of the aurorae follow the sunspot cycle fairly closely — although this is measured in a statistical fashion; the 'peak' of the auroral activity is somewhat 'spread' and may lag the sunspot peak by up to two years.

To take advantage of auroral propagation, keep a watch on the magnetic storm warnings — the IPS warnings and current activity are broadcast by at least the VK2 WIA Divisional broadcast each Sunday morning. Monitor the HF bands. Weak 'watery' signals between 5 MHz and 10 MHz in the early afternoon are good indicators — the effect becomes increasingly noticeable at higher frequencies as time progresses — particularly on paths with a great circle route that passes through the high



latitudes south of Australia (from South Africa for example).

When distortion and flutter become apparent on signals at the upper end of the HF range it is time to start looking on VHF. Aim south, swinging your beam through a wide range of angles, calling at intervals, listening carefully.

The most likely area in which stations may communicate via auroral reflection is south of 40° geomagnetic latitude (see fig. 2.).

Distances may range up to 2000 km, but 500 — 1000 km is more usual according to observations from the USA and Europe. It should be possible to work New Zealand and Macquarie Island from S.E. Australia.

The rapidly varying nature of the auroral display gives rise to extreme multi-path propagation effects resulting in severe distortion of modulated signals. Obviously, and from much prior experience, the best mode for communications is CW, followed by SSB; although, at times auroral propagation may show characteristics distinctly similar to Sporadic-E.

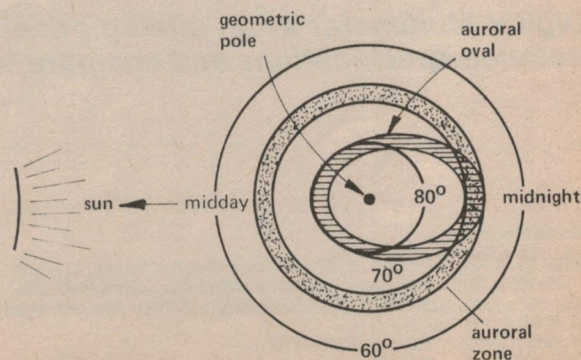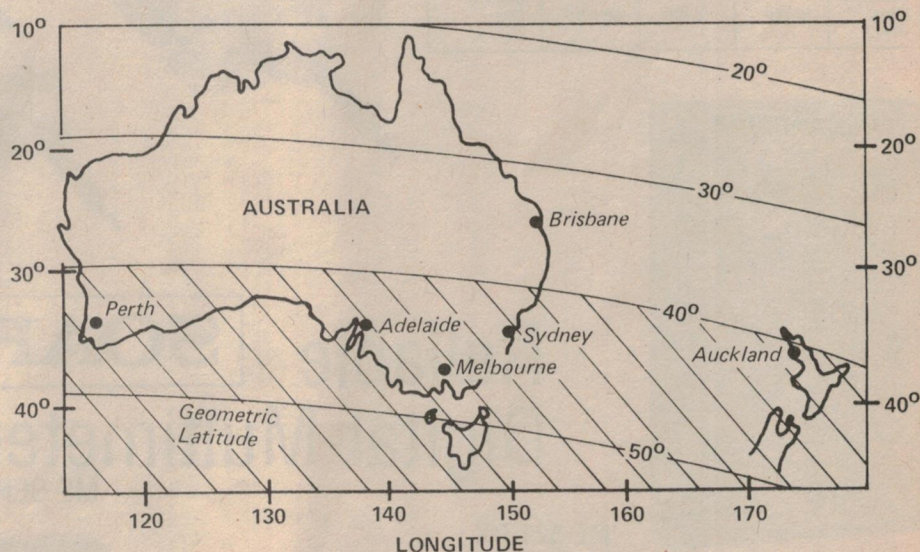


LOGIC PROBES & DIGITAL PULSER

LP-1. Hand-held, instant reading of logic levels for TTL, DTL, HTL or CMOS




LP-2. The economy version of LP-1. Safer than voltmeter. More accurate than scope

LP-3. High-speed logic probe captures pulses as short as 10ns

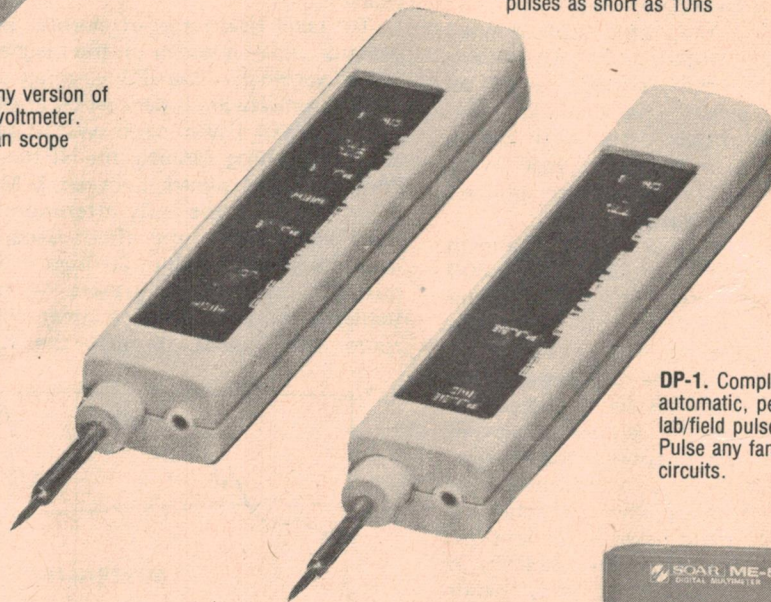

DP-1. Completely automatic, pencil-size lab/field pulse generator. Pulse any family of digital circuits.

	LP-1	LP-2	LP-3	DP-1
Input Impedance	100,000 ohms	300,000 ohms	500,000 ohms	Output Tri State
Minimum Detectable Pulse	50ns	300ns	10ns	Autopolarity Pulse Sensing
Max. Input Signal (Freq.)	10 MHz	1.5 MHz	50 MHz	Sink and Source 100 ma

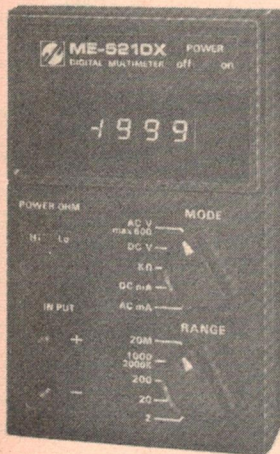


Reliable **SOAR** Digital Multimeters ME SERIES

ME-521 DX
3 1/2 digit LED display


Digital Multimeter at an analog price! Send for detailed specifications and compare before buying.

Available from:

NSW: David Reid Electronics, 516-3544. Radio Despatch Service, 211-0191. Electronics (Distributors), 636-6052. Martin De Launay, 29-5834. Standard Components, 660-6066.
VIC: Radio Parts, 329-7888. Stewart Electronics, 543-3733. Arlin Instruments, 569-6984.
S. AUST: Protronics, 212-3111.
W. AUST: Reserve Electronics, 328-3116.
QLD: Wilber Sales, 391-5136.

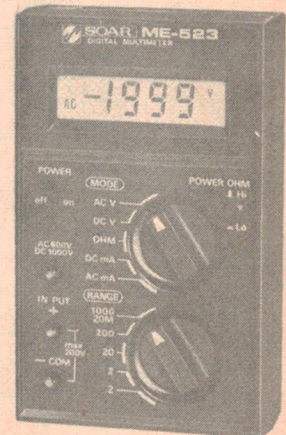

ME-523
3 1/2 digit 3/4" high LCD with mode display

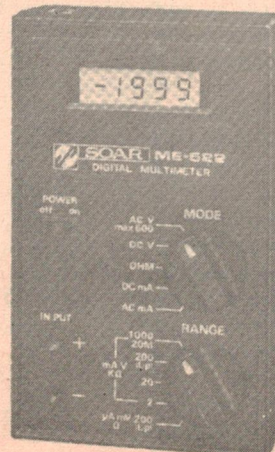

ME-522
3 1/2 digit LCD display

SWL News

Compiled by Peter Bunn, on behalf of the Australian Radio DX Club (ARDXC).

All times are in Greenwich Mean Time (GMT), add 11 hours for Australian Eastern Summer Time. All frequencies are given in kiloHertz (kHz).

Turkey

The Voice of Turkey at Ankara is noted on two new outlets for the relay of the Home Service for Turks abroad. Both 11955 and 11965 kHz are noted between 0400 and sign-off at 0600 daily, with programmes of Turkish music. The English service is on air daily 2130-2300 on 11955, 6185, 7170 and 9515 kHz.

Indonesia

Two regional centres have introduced new frequencies for shortwave transmissions. Radio Republik Indonesia at Kupang in West Timor is now using 3260 kHz which is heard in addition to the usual Kupang frequency of 3385 kHz. Reception is possible in Australia between 1300 and 1430. RRI at Padang has recently switched from 3961 kHz to the new outlet of 4002 kHz for programmes in Indonesian in our late evenings here in Australia.

Yemen

Radio Sanaa in North Yemen is now using two transmitters simultaneously in the 60 metre tropical broadcast band. Both 4853 and 4975 kHz are currently being used for relays of the General Service in Arabic. Both frequencies are audible from about 1430 when signals from West Asia and East Africa begin to fade-in on the tropical bands as darkness slowly edges across these areas, thus providing an all-darkness path between these locations and Australia, with signals passing over the Indian Ocean.

Azad Kashmir

Summer in Australia means that signals from Asia tend to fade in earlier in our local evenings, as centres north of the equator experience earlier sunset times. One station which is audible as a result of this pattern is Azad Kashmir Radio in the Pakistani part of this disputed territory to the North of the subcontinent. Azad Kashmir Radio is audible at present on 6010 kHz, with signals fading in at about 1145. In winter, this station would not normally be heard in Australia, as far too much daylight would exist on the path across south Asia and the Indian Ocean, causing absorption of the signal.

Sri Lanka

The DX programme of the Sri Lanka Broadcasting Corporation (SLBC) known as "Radio Monitors International" has now been expanded to a

30 minute programme. Programme time has now been doubled due to the introduction of a new segment in the last 15 minutes of "RMI" which is known as "Window on the World".

"Window on the World" will consist of presentations by a number of co-operating international broadcasters and DX clubs.

The first Sunday of each month will feature "DX Digest" hosted by Ian McFarland of Radio Canada International.

The second Sunday of the month will see Clive Jenkins of the England based World DX Club presenting a European DX report.

The Australian Radio DX Club will produce the "Window on the World" segment on the third Sunday each month, with hosts Robert Chester and Bob Padula. The ARDXC segment will concentrate on DX tips and news of interest to Pacific and South East Asian DX listeners.

Both Radio Monitors International and the organisations presenting the special segments in "Window on the World" will issue special QSL cards for correct reception reports of the programme they produce. But remember that *all* reports should be sent to Radio Monitors International at Box 15 Poona 411 001, INDIA. "RMI" host Adrian Peterson will then forward the reports to the other programme producers who will issue their respective QSLs for correct reports.

The new, expanded "Radio Monitors International" may now be heard at these times and on these frequencies: Sundays 1100-1130, on 11835kHz, 15120kHz and 17850kHz. Sundays 1400-1430, on 6075kHz, 9720kHz and 15425kHz.

Overseas Club News

Two major associations of DXing clubs will be held during June. The ANARC, the Association of North American Radio Clubs, will be held in Minneapolis from June 22-24. The annual EDXC, European DX Council conference will be held in Vienna June 1-4. These conferences are important for inter-club contact within these regions, and often play major roles in setting hobby aims and maintaining high standards in the DX hobby. The ARDXC is an observer-member of the EDXC, with the right to be represented at the annual conference.

South Korea

Radio Korea, Seoul, is an international broadcaster which currently uses several out-of-band channels. English prog-

rammes may be heard on 7550 kHz 2000-2030, and again from 2300-2330. Also used currently is 9870 kHz, on air with English 0530-0600, and 1330-1400 daily.

Monaco

Trans World Radio Monte Carlo has a special DX programme in English on Saturdays between 0945-0955, using 9610 kHz. There is also a daily English service from Monte Carlo 0725-0900 on 7105 kHz. TWR also transmits via Bonaire in the Netherlands Antilles, with English daily on 11925 kHz 0030-0130.

Austria

The Austrian Radio (ORF) schedule effective until March, shows English programmes beamed to Australia 0430-0500 on 17770 kHz; 0830-0900 on 17720 kHz, 21555 and 15410 kHz; and also between 1230-1300 on 21715 kHz. The Saturday programmes include "The Week in Austria". DXers and SWLs will be interested in the special Sunday programme "Austrian Shortwave Panorama" heard in English 0915-0930 on 21715 kHz.

United Nations

United Nations Radio programmes are broadcast to Asia Tuesdays to Saturdays, with English and Japanese on 15250 kHz, 9565 kHz and 5955 kHz. These transmissions emanate from the Philippines relay (1525 kHz), from Delano (9565) and from Dixon, California (5955).

Zimbabwe

The Voice of Zimbabwe currently broadcasts via the facilities of Radio Mozambique in Maputo, and is audible from sign-on at 1800 until past 1845 on 4855 kHz. This programme is produced by the Zimbabwe African National Union, and is in English. At other times, 4855 kHz carries the normal Radio Mozambique programme in Portuguese.

Yemen

Aden radio is now observed on the new outlet of 6005 kHz from evening sign-on at 1500 daily. This transmitter carries the General Service in Arabic, and provides excellent signals in Australia currently.

Compiled by the Australian Radio DX Club (ARDXC). For further information regarding shortwave radio and ARDXC's activities, write to either PO Box 67 Highett, Vic. 3190, or to PO Box 79, Narrabeen, NSW 2101, with a 30c stamp.

SPEAKERS ! SPEAKERS ! SPEAKERS !

Bill Edge of Electronic Agencies has a speaker for YOU - no matter what your requirements we have the one for that special job - from repairing a transistor radio, a replacement car speaker to an elaborate Hi Fi set up.

HI FI SPEAKERS, SPEAKER BOXES & ACCESSORIES. TOP QUALITY HI FI SPEAKERS AT VERY ATTRACTIVE PRICES.

12" WOOFER
roll surround res. freq 28 Hz
frequency range Fo- 3KHz
sensitivity ---- 100dB
max power ----- 30 watts
impedance ----- 8 ohms
CAT. 1200 ----- \$34.50



10" WOOFER
roll surround res. freq 34Hz
frequency range Fo- 6KHz
sensitivity ---- 95 dB
max power ----- 25 watts
impedance ----- 8 ohms
CAT 1205 ----- \$23.50



8" WOOFER
roll surround res. freq 40 Hz
frequency range Fo- 6KHz
sensitivity ---- 95dB
max power ----- 20 watts
impedance ----- 8 ohms
CAT 1210 ----- \$13.90



8" FULL RANGE TWIN CONE.
roll surround res. freq 40Hz., frequency range
Fo- 16KHz., sensitivity 95dB., max power 20
watts., impedance 8 ohms ---CAT1215 \$15.90



5 1/4" MID RANGE
res freq 600Hz., freq range 800-
9KHz., sensitivity 97dB., max power
10 watts., impedance 8 ohms. CAT 1220 \$5.80




3" TWEETER.
freq range 1000- 20KHz., sensitivity 94dB.,
max power 20 watts., impedance 8 ohms.
CAT 1225 - \$5.95




1" DOME TWEETER
freq range 2000- 20KHz., sensitivity
102dB., max power 50 watts.,
impedance 8 ohms. CAT 1230 - \$8.90



CELLULAR HORN SPEAKER
freq range 2KHz- 20KHz., max power 30 watts
impedance 8 ohms. CAT 1235 \$9.75




2 WAY CROSSOVER NETWORK
suitable for above speakers or similar. cross
over 5000Hz., max input 30 watts RMS., rolloff
6dB/oct., dim 68x50x13mm. CAT 1250 \$4.55
3 WAY CROSSOVER NETWORK
crossover 1000,5000Hz., max input 40 watts RMS
rolloff 6dB/oct., dim 137x100x25mm. CAT 1255
\$7.25



ATTENUATORS
Midrange CAT 1270 \$5.45
Highrange CAT 1271 \$5.45
for 3 way systems. impedance 8-10 ohms.,
atten. range 5- 30dB. 18w RMS




MINIATURE SPEAKERS
All 8 ohm impedance - all sorts of uses-
small projects replacements etc. 2" (51mm)
CAT 1236. 2 1/2" (57mm) CAT 1237. 2 1/4" (64mm)
CAT 1238. 2 1/2" (70mm) CAT 1239. All \$1.30 ea
10 up \$1.10 ea.



100 WATT/8ohm BASS GUITAR SPEAKER.
SPECIAL!!! CAT 1203 \$75.00

7 WAY STEREO SPEAKER CONTROL.
3 pairs of speakers can be
selected in 7 different
combinations. Full instructions
CAT 1275 \$11.90



STEREO AUDIO LEVEL CONTROL (L PAD)
Ganged wirewound volume control to adjust out
put of two speakers. 5 watts RMS. -30dB to
0.5dB. CAT 1277 \$7.80


MONO AUDIO LEVEL CONTROL.
same as above, but to control one
speaker only. 15 watts. CAT 1278 \$6.90



SPEAKER ENCLOSURE.
new sculptured foam front. speaker
8" twin cone., power 10 watts.,
impedance 8 ohms, response 50-15
KHz., dim 360x240x145mm. CAT 1290
\$26.95



PHILIPS FAMOUS SPEAKERS & ENCLOSURES.
AD0160T8 1" high fidelity dome tweeter CAT
1232 \$13.00. AD5060/SQ8 5" mid range (sqawker)
CAT 1222 \$18.00. AD8066/W8 8" high fidelity
woofer 40W. RMS CAT1212 \$22.00. AD12100 12"
high fidelity woofer 40W RMS. CAT 1202 \$59.00
AD12K12 12" 3 way speaker & enclosure kit. CAT
1287 \$289.00 pair. AD8K30 8" 3 way speaker
enclosure kit CAT 1282 \$205.00 pair.



We have a complete set of pamphlets giving
specifications & enclosure designs for the
above Philips speakers- FREE on request.

CAR SPEAKERS.
Most common replacement speakers- all with
heavy duty magnet.
5" round (130mm) 4ohm/8ohm CAT 1240 \$6.25.
6"x4" oval (150mm x 100mm) 4ohm/8ohm CAT 1241
\$5.75. 8"x4" oval (200mm x 100mm) 4/8ohm CAT
1242 \$8.75. 7"x5" oval (180mm x 130mm) 4/8 ohm
CAT 1243 \$7.25. 9"x6" oval (230mm x 150mm) 4/8
ohm CAT 1244 \$9.50.


ENCLOSED CAR SPEAKERS.
Convertible wedge or
flush mounting speakers
for rear shelf or door
mount. 5" speaker 5oz
mag 10watts, 4/8 ohms
CAT1245 \$16.00 pair.



Flush mounting for rear shelf or
door with red trim 5 1/4" speaker 3oz
magnet 8watts max, 4/8 ohms. CAT
1246 \$18.00 pair.
Dual cone flush mount- real sound
quality freq response 85- 18KHz, 20
watts max, 10oz magnet, 6 1/4" speaker
4/8ohm. CAT 1247 \$29.50 pair
Co Axial flush mounting speakers
for really superb sound quality. 85
to 18KHz. black trim, 5 1/4" speaker
10oz magnet 20 watts max. CAT1248
\$39.50 pair.




MONO FADER CONTROL
Fade between front & rear speakers
on your car radio- full volume front
or rear or both speakers on at the
same time. CAT 1261 \$4.50.
STEREO FADER CONTROL
For four speakers. Sound can be faded
between front pair & rear pair or all
four at once. CAT 1260 \$5.90



POWER BOOSTER
Just connect between car radio/ cassette player
and your speakers- whacko 20 watts RMS of
power. CAT 1265 \$35.00

Dek

Model 250

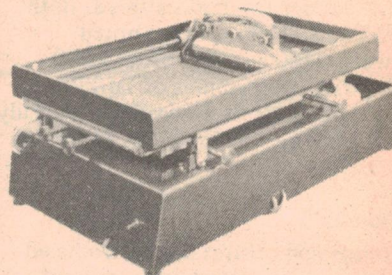

TWICE AS MANY OR TWICE AS FAST OR TWICE THE SIZE

That's roughly the promise of
the new Dek 250 precision sc-
reen printer. Double benefits
all round. Whether you are re-
sisting P.C.B.'s, printing front
panels or producing foil or
plastic labels.

The Dek 250 prints an area of
18" x 10" (450 x 250mm) More
than twice the size of the well
established Model 240.

Of course the model 240 is still
available. So is the Dek 1200
specifically designed for thick
film work. So too is the Dek 65
for R & D applications.

See the Dekmatic 65 and the
240 at the Australian Interna-
tional Engineering Exhibition,
Sydney Showgrounds Sept.
11-16. We are in the British
Pavillion, Stand No.6.

Dek

PRECISION PRINTING SYSTEMS

Represented in Australia by
Findon Machinery Co. Pty. Ltd.

31 Metropolitan Ave.,
Nunawading, Vic. 3131.
Phone (03) 878-0883.

ELECTRONIC AGENCIES

115-117 PARRAMATTA ROAD, CONCORD, 2137. TELEPHONE 7476472.

BUSSINESS HOURS 9AM-5.30PM MON. FRI. 9AM-NOON SAT.

MAIL ORDER: \$1 MIN PACK/POST + 5% OF PURCHASE

ALL LARGE ITEMS SENT FREIGHT ON BY ROAD T/PORT.

MAIL ORDER.

P.O. Box. 1005.

BURWOOD NORTH, 2134.

SUPER SPECIALS

BD 139 — 50c ea. MJ2955 — 80c
 BD 140 — 50c ea. 2N3055 — 75c
 BC 547/8/9 — 15c ea. BC 557/8/9 — 20c ea.
 10 555 Timers for \$2.80 10 741's for \$2.80.

CANNON CONNECTORS

XLP-3-11 \$2.30
 XLP-3-12c \$3.25
 XLP-3-31 \$3.25
 XLP-3-32 \$3.00
 XLR-LNE-11c \$3.05
 XLR-LNE-32 \$4.30

Weller cordless soldering iron kit, model WC100DKW — includes batteries, solder, 4 interchangeable tips, battery charger and instructions for only \$29.50.

TTL

7400.....20
 7401.....25
 7402.....28
 7403.....28
 7404.....37
 7405.....37
 7406.....50
 7407.....50
 7408.....34
 7409.....34
 7410.....20
 7411.....37
 7413.....54
 7414.....90
 7416.....60
 7417.....60
 7420.....30
 7422.....30
 7426.....45
 7427.....45
 7430.....30
 7432.....43
 7437.....50
 7438.....50
 7440.....30
 7441.....1.50
 7442.....70
 7447.....60
 7448.....60
 7450.....35
 7451.....35
 7453.....35
 7454.....30
 7460.....35
 7470.....65
 7472.....45
 7473.....60
 7474.....65
 7475.....65
 7476.....45
 7480.....1.25
 7483.....1.25
 7485.....1.45
 7486.....65
 7490.....35
 7491.....1.00
 7492.....75
 7493.....35
 7494.....1.10
 7495.....95
 74100.....2.45
 74107.....65
 74121.....60
 74123.....60
 74132.....1.25
 74150.....1.80
 74151.....1.10

74153.....1.10
 74154.....1.70
 74157.....1.10
 74160.....1.55
 74164.....1.55
 74165.....1.55
 74173.....2.75
 74175.....1.65
 74180.....1.35
 74192.....1.40
 74193.....1.40
 74221.....1.50
 74367.....1.40

74LS

74LS00.....30
 74LS01.....30
 74LS02.....30
 74LS03.....30
 74LS04.....35
 74LS05.....35
 74LS08.....30
 74LS09.....30
 74LS10.....30
 74LS11.....30
 74LS12.....30
 74LS14.....1.20
 74LS20.....30
 74LS21.....30
 74LS27.....30
 74LS28.....40
 74LS30.....30
 74LS32.....33
 74LS37.....45
 74LS38.....45
 74LS40.....30
 74LS42.....1.20
 74LS73.....1.20
 74LS74.....50
 74LS75.....70
 74LS78.....50
 74LS85.....1.50
 74LS86.....50
 74LS90.....1.20
 74LS92.....1.20
 74LS93.....1.20
 74LS95.....1.50
 74LS109.....50
 74LS113.....55
 74LS114.....55
 74LS138.....1.20
 74LS151.....1.20
 74LS154.....1.60
 74LS157.....90
 74LS163.....1.20
 74LS164.....1.30
 74LS174.....1.00
 74LS175.....1.00

74LS191.....1.20
 74LS192.....1.20
 74LS193.....1.20
 74LS194.....1.20
 74LS195.....1.20
 74LS196.....1.20
 74LS221.....1.20
 74LS253.....1.85
 74LS279.....65
 74LS365.....80
 74LS367.....80
 74LS368.....80

CMOS

4000.....40
 4001.....25
 4002.....25
 4006.....1.40
 4007.....25
 4008.....1.25
 4011.....25
 4012.....25
 4013.....55
 4014.....1.35
 4015.....1.20
 4016.....50
 4017.....1.40
 4018.....1.40
 4019.....75
 4020.....1.60
 4021.....1.40
 4022.....1.60
 4023.....25
 4024.....90
 4025.....40
 4027.....80
 4028.....1.25
 4029.....1.90
 4030.....40
 4040.....1.30
 4041.....1.25
 4042.....1.25
 4043.....1.50
 4044.....1.50
 4046.....1.95
 4049.....60
 4050.....60
 4051.....1.20
 4052.....1.20
 4053.....1.20
 4060.....2.65
 4066.....1.00
 4068.....40
 4069.....35
 4070.....40
 4071.....40

4072.....40
 4073.....40
 4074.....40
 4076.....1.85
 4077.....40
 4078.....40
 4081.....40
 4082.....40
 4510.....1.30
 4511.....1.30
 4518.....1.30
 4520.....1.30
 4528.....1.20
 4555.....1.20
 14553.....7.50
 14584.....1.25
 74C00.....40
 74C02.....40
 74C04.....40
 74C08.....40
 74C10.....40
 74C14.....1.90
 74C48.....2.55
 74C73.....1.20
 74C75.....1.20
 74C76.....1.35
 74C90.....2.25
 74C93.....2.25
 74C175.....1.85
 74C192.....2.25
 74C193.....2.25

LINEAR

301.....35
 307.....65
 308.....1.35
 311.....85
 324.....1.35
 339.....90
 349.....2.25
 356.....1.65
 380.....1.20
 381.....2.00
 382.....2.00
 386.....1.95
 555.....35
 556.....85
 565.....1.95
 566.....2.50
 567.....2.65
 709.....75
 723(VR).....55
 741.....35
 747.....1.25
 3900.....90
 3909.....1.25
 CA3130.....1.95

VOLTAGE REGS.

309.....1.50
 317.....2.90
 323.....8.25
 325.....2.60
 723.....55
 7805.....90
 7806.....1.30
 7808.....1.30
 7812.....90
 7815.....1.30
 7818.....1.30
 7824.....1.30
 7905.....1.50
 7912.....1.50
 7915.....1.50
 78L05.....50
 78L12.....50
 78L15.....50
 79L05.....85
 79L12.....85
 79L15.....85

OPTO

FND507 C/A.....1.70
 FND 357C/C.....1.40
 FND 500C/C.....1.40
 Red LED.....22
 Green LED.....35
 Yellow LED.....35

DIODES

IN4148.....6c — 5c/100
 IN4004.....9c
 IN5625 5A 400V.....45c

I.C. SOCKETS

8 PIN DIL.....25
 14 PIN DIL.....33
 16 PIN DIL.....35
 18 PIN DIL.....55
 24 PIN DIL.....70
 28 PIN DIL.....1.20
 40 PIN DIL.....1.40

Also in stock Multimeters, relays, veroboard, solder, solderwick, soldering irons, transformers.
 All components brand new by top companies. Prices current till end of March.

ROD IRVING ELECTRONICS

Shop 499, High Street, Northcote. Vic. 3070. Ph (03) 489-8131. Open Mon-Thurs 8 am — 5.30 pm, Fri 8am — 7 pm. Sat 8.30am-12.30pm Mail Orders: PO Box 135, Northcote. Vic.3070. Minimum 75c post and pack. Send 30c stamp for free condensed catalogue.

KITS FOR ETI PROJECTS

WE GET MANY enquiries from readers wanting to know where they can get kits for the projects we publish.

We have only listed the projects published in the last two years, with their dates of publication, so this page can also be used as an index, even though kits are not available for some of them (as far as we know). We will repeat a complete list every 6-12 months depending on space limitations. Any companies not included in this list should phone Jan Collins on 33 4282.

Key To Companies

- A Applied Technology Pty Ltd, 1A Paterson Avenue, Waitara, NSW 2077.
- C J R Components, PO Box 128, Eastwood NSW 2122
- D Dick Smith Electronics P/L, PO Box 747, Crows Nest NSW 2065
- E All Electronic Components, 118 Lonsdale Street, Melbourne Vic 3000
- J Jaycar Pty Ltd, PO Box K39, Haymarket, NSW 2000
- K S M Electronics, 10 Stafford Court, Doncaster East, Vic 3109
- M Mode Electronics, PO Box 365, Mascot NSW 2020
- N Nebula Electronics Pty Ltd, 15 Boundary Street, Rushcutters Bay NSW 2011
- O Orbit Electronics, PO Box 7176, Auckland, New Zealand
- P Pre-Pac Electronics, 718 Parramatta Road, Croydon NSW 2132
- R Rod Irving, PO Box 135, Northcote Vic 3070
- T Townsville Electronic Centre, 281E Charters Towers Road, Rising Sun Arcade, Townsville Qld 4812
- V Silicon Valley, 23 Chandos Street, St Leonards NSW 2065

Project Electronics

- 041.Continuity TesterT, D
- 042.Soil Moisture IndicatorT, D
- 043.Heads or Tails CircuitOct 76 . . .T, D, E, A
- 044.Two Tone Door BellOct 76 . . .T, D, E, O, A
- 045.500 Second TimerT, D, O, A
- 047.Morse Practice SetT, D, O, A
- 048.Buzz BoardT, D, A
- 061.Simple AmplifierOct 76 . . .T, D, O, A
- 062.Simple AM TunerMar 77 . . .D, E
- 063.Electronic BongosD, A
- 064.Simple IntercomNov 76 . . .T, O, A
- 065.Electronic SirenD, O, A
- 066.Temperature AlarmDec 76 . . .T, D, E, A
- 067.Singing Moisture MeterD
- 068.LED Dice CircuitOct 76 . . .T, D, E, A
- 070.Electronic Tie BreakerJan 77
- 071.Tape Noise LimiterJan 78 . . .E
- 072.Two-Octave OrganJun 78 . . .D
- 081.TachometerMar 77 . . .T, E, O
- 082/528Intruder AlarmT, E, A
- 083.Train ControllerD, A
- 084.Carl ArmD, A
- 085.Over-rev AlarmD, A
- 086.FM AntennaJan 78
- 087.Over-LEDJun 78 . . .O, D
- 088.Hi-Fi SpeakerOct 78 . . .O, E, D

Test Equipment

- 132.Experimenter's Power SupplyFeb 77 . . .E

- 133.Phase MeterApr 77 . . .E
- 134.True RMS VoltmeterAug 77 . . .E
- 135.Digital Panel MeterOct 77 . . .E
- 136.Linear Scale Capacitance MeterMar 78 . . .E
- 137.Audio OscillatorMay 78 . . .E
- 138.Audio WattmeterNov 78
- 139.SWR/Power MeterMay 78
- 140.1 GHz Frequency Meter-TimerMar 78 . . .C

Simple Projects

- 243.Bip BeaconApr 77
- 244.Alarm AlarmFeb 77
- 245.White Line FollowerNov 77
- 246.Rain AlarmApr 78
- 248.Simple 12V to 22V ConverterJul 78

Motorists' Projects

- 316.Transistor Assisted IgnitionMay 77 . . .K, O, E
- 317.Rev Monitor CounterJul 77 . . .E
- 318.Digital Car TachoJul 78 . . .K, E
- 319.Variwiper MK IISep 78 . . .E

Audio Projects

- 448.Disco MixerNov 76
- 449.Balanced Microphone AmpNov 76 . . .J, E
- 450.Bucket Brigade Audio Delay LineDec 77 . . .E
- 480.50-100 Watt Amp ModulesDec 76 . . .J, E, D, O, R, A
- 481.12 V 100 Watt Audio AmpMay 77 . . .E
- 481.High Power PA/Guitar AmpJun 77 . . .O
- 482.Stereo AmpJan 77 . . .O, E
- 482.Stereo Amp Part 2Feb 77 . . .O, E
- 483.Sound Level MeterFeb 78 . . .E
- 484.Simple Compressor ExpanderJul 77 . . .E, A
- 485.Graphic EqualizerJun 77 . . .J, E
- 486.Howl-round StabilizerNov 77 . . .J
- 487.Audio Spectrum AnalyserFeb 78 . . .E
- 489.Audio Spectrum Analyser 2Apr 78 . . .J, E
- 495.Transmission Line SpeakersAug 77

Miscellaneous

- 546.GSR MonitorMar 77 . . .E
- 547.Telephone Bell ExtenderJun 77 . . .E
- 548.Photographic StrobeMay 77 . . .E
- 549.Induction Balance Metal DetectorMay 77 . . .E
- 550.Digital DialAug 78 . . .E
- 551.Light ChaserSep 78 . . .A
- 552.LED PendantSep 78 . . .A
- 553.Tape/Slide SynchroniserOct 78 . . .E
- 581.Dual Power SupplyJan 77 . . .E
- 582.House AlarmJul 77 . . .T, O, E, A
- House Alarm - Installation InstructionsAug 77

- 583.Marine Gas AlarmAug 77 . . .M, E
- 585.Ultrasonic SwitchSep 77 . . .R, O, E, T
- 586.Shutter Speed TimerOct 77 . . .E
- 587.UFO DetectorMay 78
- 588.Theatrical Lighting ControllerNov & Dec 77 . . .N
- Jan & Mar 78

- 589.Digital Temperature Meter (PCB135)Dec 77 . . .E
- 590.LCD StopwatchOct 78 . . .N
- 591.Up/Down Presettable CounterJul 78 . . .E
- 592.Light Show ControllerAug 78 . . .E

Electronic Music

- 602.Mini OrganAug 76 . . .O, E, D, A
- 603.SequencerAug 77
- 604.Accentuated Beat MetronomeSep 77 . . .E
- 605.Temp Stabilized Log-exponential ConverterSep 78

Computer Projects

- 630.Hex DisplayDec 76 . . .E, A
- 631.ASCII KeyboardDec 76 . . .O, E, A
- 631.Keyboard EncoderApr 77 . . .O, E, A
- 632.Video Display UnitJan . . .O, A
- Mar 77
- 633.TV Sync GeneratorJan 77 . . .E, A
- 634.8080 Educational/Prototyping InterfaceJul, Aug 78
- 635.Microcomputer Power SupplySep 77
- 637.Cuts Cassette InterfaceJan 78 . . .V, O, E, A
- 638.Eprom ProgrammerJul 78 . . .E, A
- 639.Computerised Musical DoorbellMar 78 . . .A
- 640.S100 VDUApr . . .V, O, A
- Jun 78
- 641.S100 PrinterSep 78
- 650.STAC TimerNov 78 . . .A


Radio Projects

- 712.CB Power SupplyJun 77 . . .O, E
- 713.Add-on FM TunerSep 77
- 714.VHF-Log-Periodic AntennaFeb 78
- Mar 78
- 715.VHF Power AmplifiersNov 77
- 716.VHF Power AmplifiersJan 78
- Feb 78
- 717.Crosshatch GeneratorMay 78 . . .E, A
- 718.RF RadioOct 78 . . .E
- 719.RF Field Strength IndicatorNov 78

Electronic Games

- 804.SelectagameNov 76 . . .O
- 804.Selectagame (Rifle Project)Mar 77 . . .O
- 805.Puzzle for the Drunken SailorOct 77
- Jan 78
- 806.SkeetJan 78
- 810.Stunt Cycle TV GameJun 78 . . .O, D
- 811.TV Tank GameOct 78 . . .O, E, D

MXR Professional Products

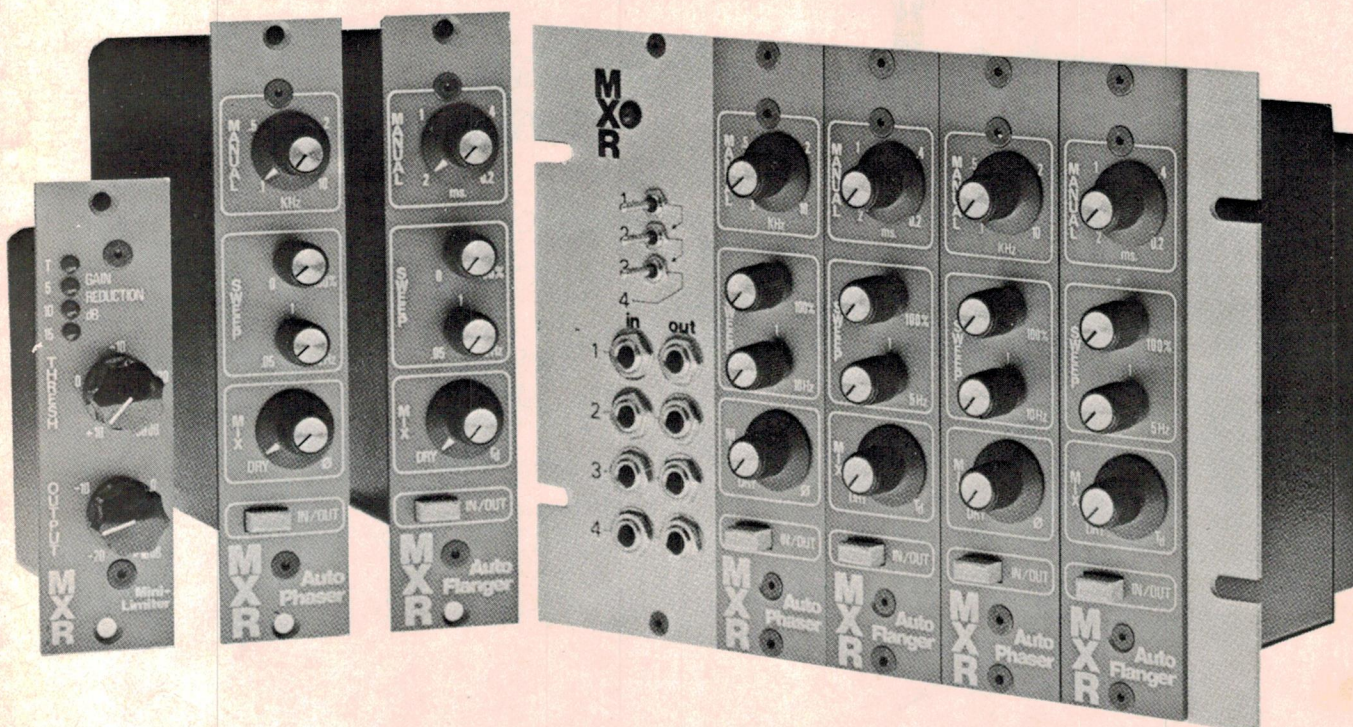

The MXR Auto Phaser is designed to be the finest phasing unit available for professional applications. The Auto Phaser's low distortion, low noise, and wide range of effects enables it to fill every studio phasing need.

Ease of operation, low power consumption, and wide supply range makes it ideal in any portable mixing or P.A. application.

Packaged in a compact and durable case, its controls are set up in a user-oriented fashion.

The subjective audible effect of phasing is a product of a phase-shift created response characteristic resulting in a series of "notches" in the audio spectrum similar to reel flanging, but differing from flanging in the sense that these notches are not harmonically related.

The MXR Mini Limiter is designed as a cost-effective answer to meeting the wide variety of audio limiter applications.

Its wide supply range, low power consumption, and input-output characteristics enable it to interface with a diversity of equipment, from portable high impedance mixers to custom low impedance consoles.

Low noise, low distortion and quick response enable it to effectively control signal peaks. Attack time is fast (approx. 1ms.), and release time is both variable via rear trim pot and dependent upon the amount of gain reduction. Four instantly responsive L.E.D.'s continuously indicate gain reduction. The Mini Limiter has quick recovery from heavy gain reduction, but approaches maximum gain slowly, a most useful recovery characteristic in application.

The Mini Limiter is supplied in a sturdy and compact case which can easily be incorporated into any console or rack.

The MXR Auto Flanger is the first professional audio delay line capable of producing true flanging—repeatably and economically, designed for both portable use and custom installations, the Auto Flanger reliably meets the most demanding of professional audio needs.

The front panel layout and control functions are designed to be as versatile as possible while maintaining ease of operation.

Due to the precise mathematical relationship between the time delay and the resulting comb filter response, the Auto Flanger causes random program material (i.e. drums, cymbals, and other percussion) to take on musical tonality, a characteristic not found with phasing.

The MXR Professional Products Rack is a compact, self-contained enclosure for mounting, powering, and interfacing up to four Auto Flangers or Auto Phasers in any combination. Its unique power supply design allows operation over a wide range of line voltages.

Packaged in a rugged and attractive case, the Professional Products Rack is designed for standard half-rack mounting. It may also be used in a freestanding configuration for studio effects on location. A versatile control arrangement permits independent operation of each unit or synchronous operation in a wide variety of master-slave combinations. Conveniently grouped phone jacks make it possible for units to be patched individually or in series. This complete flexibility allows a wide spectrum of creative effects.

For more information see your MXR dealer.
The Music Distillery, 503 Pittwater Road,
Brookvale NSW 2100. 938-2372

MXR Professional Products Group



Internationally acknowledged to be the finest cigarette in the world



The most distinguished tobacco house in the world

PA 5228
CC 1578

Mini-Mart

send your ad to —
ETI MiniMart,
Modern Magazines,
15 Boundary Street,
Rushcutters Bay,
NSW 2011.

WE'LL PRINT your 24 words (maximum) totally free of charge. Copy must be with us by the 1st of the month preceding the month of issue. Please, please write or preferably type your adverts clearly.

CONDITIONS

Name and address plus phone number (if required) must be included within the 24 words allowed. Reasonable abbreviations, such as 25 Wrms, count as one word.

Private adverts only will be accepted. Please let us know if you find a commercial enterprise using this service.

Every effort will be made to publish all adverts received — however, no responsibility for so doing is accepted or implied.

Adverts must relate to electronics or audio — general adverts cannot be accepted.

MELBOURNE hi-fi and tape fans. The Recording Society of Australia meets monthly. You are invited to come along. For information or syllabus - ring or write to Don Patrick, 36 Argyle St, Macleod, Vic 3085 (03) 459.1717.

SELL: CB Radio Super Panther 23 ch SSB/AM synthesised with licence and 2 whips, coax, etc. Also CD1 capable of 1000 SPM. Ring AH (03) 465.7553.

HALL effect computer keyboard, encoder, metal escutcheon, data sheets, socket-wiring, original box \$45 uses +5v supply. B Lind, 11 Tracey Avenue, Flinders Park, SA 5025.

WANTED: Old paper tape punching and reading machines, working, 8 column. C B Munchow, 13 Parsons St, Toowoomba, Qld 4350. Phone (076) 35.1148.

BRAND new TI59 programmable calculator. Excellent value at \$260. Software enquiries welcome. Contact Serge Petelin, 95 Gerler St, Bardon, Qld (07) 36.4197.

TI58/59, HP25/25C programs. Roulette, golf, sniper, wumpus. Also biorhythms, mastermind, hilo (HP only); nim, lunar-landing, blackjack (TI only). \$3 each. Or 7 for \$15. I Webber, 92 Royal Pde, Qld 4060.

SELL Leader LSG 532 TV-FM sweep-marker generator. AWA volt-ohmmyst 2A56074 VTVM. \$75 each. Both new. VTVM case incl. 102 Commercial Road, Pt Augusta, SA 5700.

SALE: 2650 micro computer complete with ASCII keyboard, VDU, video modulator cassette interface, recorder and software package \$450. (02) 960.3116.

WANTED old 78 record lists and catalogues HMV, Regal, Zonophone-Capitol, London, MGM, Decca, Columbia, etc. Allen Goodwin, Bagdad Sth, Tas 7407.

FOR sale: Videotape, Sanyo, 1/2" High Energy 2400 ft reels \$10 each. R Beckett, PO Box 510, Penrith, NSW 2760. Tel (02) 230.5169 BH.

TRS-80 computer programs available, mainly exchange but will sell. Also 4k-16k upgrade kits. Write for more info C/- PO Box 122, Bondi Beach, NSW 2026.

74 ETI and 51 EA, some back to 1971. Also 30+ Practical Wireless, PE & EE. Whole lot \$160.00. Phone Dean on (03) 850.9107.

SHORTWAVE listeners and DXers: Southern Cross DX Club inc, GPO Box 336, Adelaide, SA 5001 can assist you: Sample monthly bulletin & details for 20 cent stamp.

TELETYPE for sale, ASR 33 recently overhauled and in good condition. \$650 ONO. Ring (02) 637.8189 or (02) 44.4418 AH.

WANTED desperately Phillips 506 C443 5 pin pentode valve suit old Phillips wireless type 2510. Garry Holmes, 7A Joseph St, Sale, Vic 3850, phone: (051) 44.4639.

SELL: Back issues of EA and ETI from '74 to '78 and also 5 folders suitable for above magazines. Ring AH (03) 465.7553.

FOR sale: Motorola MEK D2 kit with extra RAMs fully wired, free power supply, documents, perfect condition hardly used, \$200, bargain 337.2317, AH 337.2317.

INVALID pensioner would like regular assembly work. Has DMM and CRO. Could pick up in Sydney. R Zweers, 1 Cudgee Crescent, Mt Kembla, Tel (042) 71.3882.

TECHNICS RP3210E stereo microphone, brand new in original packing. New price \$47.50 - sell \$25.00. Tel (02) 89.4645.

S-100 16k EPROM board, 0-3 waits, 16k boundry, 1k disables 2k blank 2708 installed assembled. Tested. \$110 ONO. Steve Dart (03) 92.1765.

24 channel Markland concert mixer. 3 way eq, 3 aux sends, 600 ohms inputs, 75 ohms outputs, balanced, XLR, roadcase. \$3,500 PO Box 47-301, Auckland 764-545.

K W Viceroy transmitter, SSB/AM/CW, 80 to 10 metres. Plus old radio parts \$180. P Cole, phone (03) 848.4970.

WANTED: Circuit diagram for Phillips TCA 1676 6M transceiver, buy or copy. Contact Tony, 5/6 Lantaie Ave, Croydon, 3136.

SSTV Robot monitor wanted in perfect order. Details to G Palmer, PO Box 366, Surfers Paradise, Qld 4217, or phone (075) 39.9111.

SELL two vintage receivers (1) STCTRF 5 valve types 235/224 etc. (2) Kreisler 6 valve types 6A7/6D6/6E5, etc. Speakers no cabinets. Stewart, 1/309 Windsor Road, Baulkham Hills 2153 (02) 639.1927.

FOR sale: Unimetrics Stingray II SSB AM 23 channel CB radio. Very good condition, \$100 ONO, 8 Macintosh Street, Mount Gambier, SA 5290.

FOR sale: Apeco CCTV camera RF or video output, works with any TV, with new b'cast quality vidicon and F1.4 lens. \$200 (02) 960.3116.

MOTOROLA MEK6800 D2 evaluation kit. Assembled, tested and working including memory expansion, BUS buffers, 5 position mother board. \$285, phone (02) 440.8343 AH.

WANTED: Wharfedale Super 12 FS/AL's, Goodmans 301's and Wharfedale Super 3's. Also Harley-Turner 315's, or others. G Squires, 7 Elman Road, Cheltenham, Vic. 93.4470.

SIX aluminium knobs three sizes; eight DPDT rocker switches; two sheets fibreglass board 360 mm x 330 mm; \$5.50 total price five lots available (08) 353.1278.

COMPUTER 2650 4k RAM EA-VDU cassette interface, keyboard, etc. All housed. Stacks of software \$400 or separate \$200 each. Howard 59.3667, Bardwell Park. Urgent.

COSSOR CROs, 1 single beam \$70 working, 1 double beam \$30 not working. Phone (02) 637.4741, K Stanberg, 35 Malvern Avenue, Merrylands, NSW 2160.

AUSTRALIAN Radio DX Club, for short-wave and medium wave DXers. Monthly magazine published. Write for details with 30 cent stamp to PO Box 67, Highett, Vic 3190 or PO Box 79, Narrabeen, NSW 2101.

REGULATED power supplies (ex computer) -90v to +30v at 1A \$20; -14v +10v and +20v at 5A \$30; and +/-5v at 50A \$40; or the lot for \$65. Kris McLean, Granville 682.4015.

ADELAIDE readers who lack time, experience to build a kit. I will assemble it cheaply with 1 yr written guarantee. Paul Hampton-Smith, Prospect (08) 44.1627.

HEY LOOK AT THIS!

Mail Order Specials from

silicon valley

ALL PRICES INCLUDE TAX

LINEAR	
SN76018 10W. AMP	\$1.50
LM301A 2 PACK	\$0.70
555 TIMER	\$0.32
741-CAN METAL CAN	\$0.55
741 8 PIN	\$0.34
LM3900	\$0.87
LM3909	\$1.20
SN76477 COMPLEX SOUND CEN	\$4.80

MEMORY IC'S	
2102A-4 1K STATIC	\$1.35
2114/4045 4K STATIC	\$9.50
5101-8 256 x 4, CMOS STATIC	\$3.00
4116 16K DYNAMIC	\$20.50

REGULATORS	
LM309K. 5 VOLT	\$1.25
LM340-12. 12 VOLT	\$0.90
7805P	\$0.90
7812P	\$0.90
7815P	\$0.90

CRYSTALS (t 0.005% @ 25°C)	
XTAL — 1 Mhz	\$7.70
— 1.8 Mhz	\$7.70
— 2 Mhz	\$7.70
— 4 Mhz	\$6.60
— 5 Mhz	\$6.60
— 6 Mhz	\$6.60
— 10 Mhz	\$6.38
— 12 Mhz	\$6.38

OPTO	
TIL 209 TI RED	\$0.55 FOR 3
TIL 220 TI ¼ RED	\$0.55 FOR 2
TIL 222 TI ¼ GREEN	\$0.75 FOR 2
TIL 222 TI ¼ AMBER	\$0.82 FOR 2
TIL 305 5 x 7 ALPHA DISP	\$3.32
TIL 312 .3" 7 SEG C/A	\$1.75
TIL 313 .3" 7 SEG C/C	\$1.75

TTL	
7400 3 pack	\$0.66
7401 3 pack	\$0.66
7403 3 pack	\$0.66
7404 3 pack	\$0.66
7410 3 pack	\$0.66
7430 3 pack	\$0.66
7438 3 pack	\$0.66
7439 3 pack	\$0.85
7448 ea.	\$1.10
7472 3 pack	\$0.66
7486 3 pack	\$0.66
7490 ea.	\$0.55
74145 ea.	\$0.50
74172 ea.	\$0.78
74174 ea.	\$1.25

MAIL ORDER

P.O. BOX 898 CROWS NEST. N.S.W. 2065 AUSTRALIA



Silicon Valley
23 Chandos Street,
St. Leonards,
Sydney, N.S.W.
Tel: (02) 439 2965

Silicon Valley
380 Bridge Road,
Richmond, Melbourne,
VIC.
Tel: (03) 429 4780

Silicon Valley
170 Sturt Street,
Adelaide, S.A.
Tel: (08) 51 4080

Silicon Valley
22 Ross Street,
Newstead, Brisbane,
QLD.
Tel: (07) 52 1339

Silicon Valley
7-9 Kirk Street,
Grey Lynn, Auckland,
N.Z. Tel: 76 1169

EXCESS STOCK CLEARANCE

silicon valley MAIL ORDER

Offer valid until
stocks cleared

PART NO.	QNTY.	PRICE			
DIODES					
IN962B	1000	0.18	TTL		
IN966B	3300	0.18	7401	2368	0.18
IN4751B	200	0.25	7405	1015	0.19
IN4752B	800	0.25	7430	1568	0.18
IN4756B	650	0.25	7439	255	0.21
IN4758B	550	0.25	7448	997	0.99
IN5367B	100	0.90	7472	5600	0.22
IN6005B	350	0.18	74145	2863	0.40
IN6012B	350	0.09	74172	534	0.90
IN6027B	850	0.18	74174	208	0.97
IN6030B	350	0.18	LINEAR		
A14M.	9300	0.32	LM 339N	600	0.50
TRANSISTORS					
2N267	730	0.20	UA 709 CA	295	0.40
2N2368	500	0.22	UA 741 CP	1000	0.27
2N4141	340	0.11	UA 741 CL	905	0.40
MPS 3564	8700	0.18	TL 497	1032	2.30
MPS 3565	3200	0.15	TIS 156	1064	0.38
MPS 3638	3100	0.17	75489	1144	0.40
MJE 1103	427	1.90	75491	740	0.08
C'MOS					
4000	2628	0.20	75492	870	0.40
4014	791	1.00	76018	626	1.50
4015	430	1.10	I.C. SOCKETS		
4018	234	1.10	20 PIN GOLD	618	0.70
4030	440	0.40	22 PIN TIN	718	0.60
4050	538	0.55	28 PIN TIN	736	0.64
4412	591	0.28	28 PIN GOLD	713	0.70
4441	1863	0.86	THYRISTORS		
4502	1216	0.90	C106B1	5933	0.40
4506	209	0.62	MAC11-8	185	2.25
4516	988	0.80			
4518	779	1.30			
4556	1153	0.80			
4581	78	1.94			
4582	115	0.80			

ALL PRICES INCLUDE TAX

THIS OFFER VALID ONLY THROUGH OUR MAIL ORDER
DIVISION

P.O. BOX 898 CROWS NEST. N.S.W. 2065 AUSTRALIA

PLEASE ADD \$2.00 FOR POST AND PACKAGING. GOODS WILL
BE DESPATCHED WITHIN 24 HOURS OF RECEIPT OF YOUR
CHEQUE OR MONEY ORDER.

predictions

The Ionospheric Prediction Service have kindly developed propagation predictions for us, in the form of a computer printout, which we can reproduce directly. These predictions are known as GRAFEX and contain a lot more information than those we published previously.

The left hand vertical column of each printout lists the frequency, in MHz, for each horizontal row of characters. Each vertical column of characters represents one hour, commencing at 00 UT on the left-most column going to 23 UT on the extreme right column.

Each printout is for a particular path, named at the bottom. The month to which the predictions apply, the mean path distance and the great circle bearing

are also listed beneath each printout.

A variety of up to ten characters may appear on the printout and their meanings are listed in the table reproduced here.

The form of the GRAFEX predictions allows the indication of several 'modes' of propagation. The *first* mode is that requiring the least number of 'hops'. This will mean *two* hops on paths of length 4000 to 6000 km or so, *three* hops on paths around 7000 to 10,000 km in length, and so on. The *second* mode for a path will be the next integral number of hops that may be required to propagate a signal over the path.

Thus, the second mode for paths

A blank means no propagation is possible by a normal first or second mode.

A dot indicates that propagation is possible but probably on less than 50% of the days of the month. This normally applies for the first F mode but under some circumstances the first mode may not be propagated because the layer is too low (usually for hops greater than 3000 kilometres) in which case the symbol applies to the second mode.

Propagation is possible between 50% and 90% of the days of the month. It should be noted that the median F MUF for each hour lies between the lowest ' ' and the highest ' % ' for that hour.

Propagation is possible by the first F mode on at least 90% of the days of the month unless there is a severe ionospheric disturbance. For frequencies on the highest 'F' for the hour the probability is 90% but this will increase slightly on lower frequencies.

Propagation is possible by the first E mode and on less than 50% of days by the first F mode. This symbol overrides ' ' if present.

Propagation is possible by the first E mode and between 50% and 90% of days by the first F modes. This symbol overrides ' % '.

Propagation is possible by the first E mode and by the first F mode on more than 90% of the days. This symbol overrides 'F'.

Propagation is possible by both the first and second F modes. The strongest mode is normally the first mode but the vertical aerial pattern may influence the mode received. It should be noted that the second F mode MUF is just about the highest frequency showing 'M'.

Propagation is not possible by the first mode but it is possible by the second mode. It should be remembered that propagation may be possible by other modes, e.g.: the third F or mixed E and F modes at these frequencies. This symbol does not occur very often.

High absorption i.e.: above the ALF but probably too close to it for good communication.

Complex mixture of modes including the second E mode (the vertical angles of the first F and the second E modes are often very close).

around 4000 to 6000 km in length will involve *three* hops and for paths 7000 to 10,000 km long will involve *four* hops, and so forth.

Mixed modes may also be indicated (symbols M, S and X). That is, a combination of hops involving both first and second modes perhaps (this indicates that considerable fading may be experienced on signals); a mixture of hops involving both the E and F layers of the ionosphere, etc. (See "Propagation, a Closer Look", the July 1978 issue of ETI, pages 112 to 114.).

For ultra-reliable predictions follow the times and frequencies indicated by the F characters on the printouts. For a bit of adrenalin in your operating, use the % symbols area of the printouts. But, for a real 'buzz' look to the dot symbols area and hang around during the month of the predictions for those magic days when the higher frequency DX starts pouring through!

Six metre band amateur enthusiasts should scan the printouts for those that have characters extending into the 40 MHz region and operate accordingly.

Co-ordinated Universal Time (UT) is used on all predictions. For most people's purposes that's equivalent to the well-known GMT. Thus, times for Eastern Australia will be 10 hours ahead (Eastern Australian Standard Time or E.A.S.T.); for central Australia, 9½ hours ahead and for Western Australia, 8 hours ahead. Don't forget to take into account Daylight Saving Time where and when it applies. Oh, heck, save yourself all the hassle and run a clock in the shack set to Universal Time!

For information on the areas served by the prediction charts, see ETI July 1978, page 113.

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

MARCH 1979
1033 KMS.
132.2

East Coast — South
Africa (also serves South
Central)

90

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

MARCH 1979
DISTANCE 14793 KMS.
BEARING 027.6

East Coast — North
Africa (also serves South
Central)

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

MARCH 1979
13180 KMS.
140.0

East Coast — South
America (also serves
South Central)

40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3

MARCH 1979
13433 KMS.
59.2


East Coast — North
America (also NE and
South Central)

Blob — Board for Digital Electronics by Experiment

YOUR NEAREST
BLOB DEALER?
THAT'S EASY.
WRITE TO:

**BLOB BOARD
ASSOCIATES**

P.O. Box 23, SURREY HILLS,
VIC. 3127. or RING (03) 89-1019.



MR. BLOB SAYS: Come to see me at MacGrath . . .

We will be demonstrating our fabulous range of Blob Boards and Decs at MacGrath, 208 Little Lonsdale St. Melbourne, on Friday February 16th, Saturday February 17th, Friday February 23rd and Saturday February 24th. See my exciting range of projects that are so easy to construct on my versatile decs and can be transferred to my printed boards with a few quick blobs from my Scope TC60 AUTOMATIC TEMPERATURE CONTROLLED IRON.

RAVE


PROFESSIONAL
**SOUND & LIGHT
SOUND & LIGHT
SOUND & LIGHT
SOUND & LIGHT**

*Importers of
Quality Electronic Equipment*

Complete HIRE • SALES • DESIGN
service to the entertainment industry.

OFFICE and SHOWROOMS
2388 Gold Coast Highway,
Mermaid Beach. Qld. 4218.
Phone (075) 38-3331.

DJ S77 STEREO DISCOMIXER




**SUPERIOR DESIGN
CLEAN, CRISP SOUND
REPRODUCTION.**

Automatic voice override • tape-in, tape-out • 2 microphone in • 2 x turntables in • T.T. start buttons • slave out • 2 year guarantee.
Available separate or in console C/W turntables and 200 watt power amp built-in. Mono or stereo. Size (mixer only) 17cm x 86.5cm x 9cm. Weight 4.5kg.

LITO 250 PROFESSIONAL EFFECTS PROJECTOR

• New 250W Quartz Iodine Effects projector for use with effects from spectacular Lightomat range • Lens system totally enclosed to eliminate light spill • Cool, quiet operation, high efficiency tangential air blower • Used free-standing or suspended with adjustable handle • Supplied as "Main-Frame Unit" with 50mm lens, 60, 85 & 100mm avail. • 14 attachments available — changed by slide-in rotator system — wide selection of cassettes & 6" Effect Wheels • Mains voltage selector gives range of 6 input voltages.



• STROBES • SOUND TO LIGHT UNITS • DRY ICE FOG MACHINES • ROPELITES • LIGHTING STANDS • BEACONS
• JBL SPEAKERS & CABINETS • Brochures available on request.

EPROM ERASERS



*Complete with
20-minute timer*

ERASES UP TO 30 EPROMS IN 10 MINUTES
\$120 incl. sales tax and P&P.
10 EPROM VERSION \$95 incl.

**CALCULATORS AND WATCHES
AVAILABLE ex stock**

CALCULATORS

TEXAS

TI55: \$59.76
TI58: \$125.53
TI59: \$290.72
TI-PG: \$53.83
TI-MBA: \$82.60
TI-25: \$35.45

SHARP

ELSIMATE: \$37.50
(Credit card calculator)
Calculator prices tax exempt

CASIO

FX3100: \$55.20

WATCHES

12 function LCD
CHRONOGRAPH \$42.50

EAROM ELECTRONICS

PO Box 90, East Kew, 3102.

Also available from:

MACKAY ELECTRONIC DISTRIBUTORS PTY. LTD.

Regd. Office: 32 Woodhouse Rd, Doncaster East, Victoria. 3109. Ph: 842-4885

SALES AND SERVICE **Allen** DIGITAL COMPUTER ORGANS

DIODES/ZENERS				
QTY.				
1N914	100v	10mA	.05	
1N4005	600v	1A	.08	
1N4007	1000v	1A	.15	
1N4148	75v	10mA	.05	
1N4733	5.1v	1 W Zener	.25	
1N753A	6.2v	500 mW Zener	.25	
1N758A	10v	"	.25	
1N759A	12v	"	.25	
1N5243	13v	"	.25	
1N5244B	14v	"	.25	
1N5245B	15v	"	.25	

SOCKETS/BRIDGES				
QTY.				
8-pin	pcb	.20	ww	.35
14-pin	pcb	.20	ww	.40
16-pin	pcb	.20	ww	.40
18-pin	pcb	.25	ww	.95
20-pin	pcb	.35	ww	.95
22-pin	pcb	.35	ww	.95
24-pin	pcb	.35	ww	.95
28-pin	pcb	.45	ww	1.25
40-pin	pcb	.50	ww	1.25
Molex pins	.01	To-3 Sockets		.25
2 Amp Bridge		100-prv		.95
25 Amp Bridge		200-prv		1.50

TRANSISTORS, LEDS, etc.				
QTY.				
2N2222	(2N2222 Plastic .10)			.15
2N2222A				.19
2N2907A	PNP			.19
2N3906	PNP (Plastic Unmarked)			.10
2N3904	NPN (Plastic Unmarked)			.10
2N3054	NPN			.45
2N3055	NPN 15A 60v			.60
T1P125	PNP Darlington			1.95
LED Green,	Red, Clear, Yellow			.15
D.L.747	7 seg 5/8" High com-anode			1.95
MAN72	7 seg com-anode (Red)			1.25
MAN3610	7 seg com-anode (Orange)			1.25
MAN82A	7 seg com-anode (Yellow)			1.25
MAN74	7 seg com-cathode (Red)			1.50
FND359	7 seg com-cathode (Red)			1.25

9000 SERIES				
QTY.		QTY.		
9301	.85	9322		.65
9309	.35	9601		.20
9316	1.10	9602		.45

MICRO'S, RAMS, CPU'S, E-PROMS				
QTY.		QTY.		
8T13	1.50	2107B-4		4.95
8T23	1.50	2114		9.50
8T24	2.00	2513		6.25
8T97	1.00	2708		10.50
74S188	3.00	2716 D.S.		34.00
1488	1.25	2716 (5v)		59.00
1489	1.25	2758 (5v)		23.95
1702A	4.50	3242		10.50
AM 9050	4.00	4116		11.50
		6800		13.95
MM 5314	3.00	6850		7.95
MM 5316	3.50	8080		7.50
MM 5387	3.50	8212		2.75
MM 5369	2.95	8214		4.95
TR 1602B	3.95	8216		3.50
UPD 414	4.95	8224		3.25
Z 80 A	22.50	8228		6.00
Z 80	17.50	8251		7.50
Z 80 PIO	10.50	8253		18.50
2102	1.45	8255		8.50
2102L	1.75	TMS 4044		9.95

C MOS		
QTY.		
4000		.15
4001		.15
4002		.20
4004		3.95
4006		.95
4007		.20
4008		.75
4009		.35
4010		.35
4011		.20
4012		.20
4013		.40
4014		.75
4015		.75
4016		.35
4017		.75
4018		.75
4019		.35
4020		.85
4021		.75
4022		.75
4023		.20
4024		.75
4025		.20
4026		1.95
4027		.35
4028		.75
4029		1.15
4030		.30
4033		1.50
4034		2.45
4035		.75
4037		1.80
4040		.75
4041		.69
4042		.65
4043		.50
4044		.65
4046		1.25
4048		.95
4049		.45
4050		.45
4052		.75
4053		.75
4066		.55
4069/74C04		.35
4071		.25
4081		.30
4082		.30
4507		.95
4511		.95
4512		1.10
4515		2.95
4519		.85
4522		1.10
4526		.95
4528		1.10
4529		.95
MC14409		14.50
MC14419		4.85
74C151		1.50

LINEARS, REGULATORS, etc.					
QTY.		QTY.		QTY.	
MCT2	.95	LM323K	5.95	LM380 (8-14 Pin)	1.19
8038	3.95	LM324	1.25	LM709 (8-14 Pin)	.35
LM201	.75	LM339	.75	LM711	.45
LM301	.45	7805 (340T5)	.95	LM723	.40
LM308	.65	LM340T12	.95	LM725	2.50
LM309H	.65	LM340T15	.95	LM739	1.50
LM309K (340K-5)	1.50	LM340T18	.95	LM741 (8-14)	.35
LM310	.85	LM340T24	.95	LM747	1.10
LM311D	.75	LM340K12	1.25	LM1307	1.25
LM318	1.75	LM340K15	1.25	LM1458	.65
LM320H6	.79	LM340K18	1.25	LM3900	.50
LM320H15	.79	LM340K24	1.25	LM75451	.65
LM320H24	.79	LM373	2.95	NE555	.45
7905 (LM320K5)	1.65	LM377	3.95	NE556	.85
LM320K12	1.65	78L05	.75	NE565	.95
LM320K24	1.65	78L12	.75	NE566	1.25
LM320T5	1.65	78L15	.75	NE567	.95
LM320T12	1.65	78M05	.75		
LM320T15	1.65				

- T T L -					
QTY.		QTY.		QTY.	
7400	.10	7482	.75	74221	1.00
7401	.15	7483	.75	74367	.95
7402	.15	7485	.55	75108A	.35
7403	.15	7486	.25	75491	.50
7404	.10	7489	1.05	75492	.50
7405	.25	7490	.45	74H00	.15
7406	.25	7491	.70	74H01	.20
7407	.55	7492	.45	74H04	.20
7408	.15	7493	.35	74H05	.20
7409	.15	7494	.75	74H08	.35
7410	.15	7495	.60	74H10	.35
7411	.25	7496	.80	74H11	.25
7412	.25	74100	1.15	74H15	.45
7413	.25	74107	.25	74H20	.25
7414	.75	74121	.35	74H21	.25
7416	.25	74122	.55	74H22	.40
7417	.40	74123	.35	74H30	.20
7420	.15	74125	.45	74H40	.25
7426	.25	74126	.35	74H50	.25
7427	.25	74132	.75	74H51	.25
7430	.15	74141	.90	74H52	.15
7432	.20	74150	.85	74H53	.25
7437	.20	74151	.65	74H55	.20
7438	.20	74153	.75	74H72	.35
7440	.20	74154	.95	74H74	.35
7441	1.15	74156	.70	74H101	.75
7442	.45	74157	.65	74H103	.55
7443	.45	74161	.55	74H106	.95
7444	.45	74163	.85	74L00	.25
7445	.65	74164	.60	74L02	.20
7446	.70	74165	1.10	74L03	.25
7447	.70	74166	1.25	74L04	.30
7448	.50	74175	.80	74L10	.20
7450	.25	74176	.85	74L20	.35
7451	.25	74180	.55	74L30	.45
7453	.20	74181	2.25	74L47	1.95
7454	.25	74182	.75	74L51	.45
7460	.40	74190	1.25	74L55	.65
7470	.45	74191	1.25	74L72	.45
7472	.40	74192	.75	74L73	.40
7473	.25	74193	.85	74L74	.45
7474	.30	74194	.95	74L75	.85
7475	.35	74195	.95	74L93	.55
7476	.40	74196	.95	74L123	.85
7480	.55	74197	.95	74LS00	.30
7481	.75	74198	1.45	74LS01	.30

74LS02	.30
74LS04	.30
74LS05	.35
74LS08	.35
74LS09	.35
74LS10	.35
74LS11	.35
74LS20	.30
74LS21	.35
74LS22	.35
74LS32	.35
74LS37	.35
74LS38	.45
74LS40	.40
74LS42	.75
74LS51	.45
74LS74	.45
74LS76	.50
74LS86	.45
74LS90	.65
74LS93	.65
74LS107	.50
74LS123	1.20
74LS151	.85
74LS153	.85
74LS157	.85
74LS160	.95
74LS164	1.20
74LS193	1.05
74LS195	.95
74LS244	1.70
74LS367	.95
74LS368	.95
74S00	.35
74S02	.35
74S03	.25
74S04	.25
74S05	.35
74S08	.35
74S10	.35
74S11	.35
74S20	.25
74S40	.20
74S50	.20
74S51	.25
74S64	.15
74S74	.35
74S112	.60
74S114	.65
74S133	.40
74S140	.55
74S151	.30
74S153	.35
74S157	.75
74S158	.30
74S194	1.05
74S257 (8123)	1.05
8131	2.75

CABLE ADDRESS: ICUSD

TELEX #

HOURS: 9 A.M. - 6 P.M. MON. thru SUN.

INTEGRATED CIRCUITS UNLIMITED
7889 Clairemont Mesa Blvd. • San Diego, California 92111 U.S.A.
NO MINIMUM

COMMERCIAL AND MANUFACTURING ACCOUNTS INVITED
ALL PRICES IN U.S. DOLLARS. PLEASE ADD POSTAGE TO COVER METHOD OF SHIPPING.
ORDERS OVER \$100 (U.S.) WILL BE SHIPPED AIR NO CHARGE.

PAYMENT SUBMITTED WITH ORDER SHOULD BE IN U.S. DOLLARS.
ALL IC'S PRIME/GUARANTEED ALL ORDERS SHIPPED SAME DAY RECEIVED.

CREDIT CARDS ACCEPTED:

Phone (714) 278-4394 BarclayCard / Access / American Express / BankAmericard / Visa / MasterCard

SPECIAL DISCOUNTS

Total Order	Deduct
\$35-\$99	10%
\$100-\$300	15%
\$301-\$1000	20%

NOW IN STOCK!

ETI 650 STAC TIMER KIT
Including Cabinet

\$89.50 ea. P&P \$4

2114 1K 4-Bit RAM

\$7.95 ea. P&P 30c.

ALPHA Connectors and Ribbon Cable,
14 to 50 way.

Use of Bench Press available no charge
to our customers.

NOW AVAILABLE EX STOCK:

The new SINCLAIR DM 235 Digital Multimeter.

Large 3½ digit display reading to plus/minus 1999. Six functions in 26 ranges. DC volts, 1mV to 1000V, AC volts, 1mV to 750V. DC current, 1uA to 1A. AC current, 1uA to 1A. Resistance, 1 ohm to 20M ohms. Diode test, 0.1uA to 1mA. Impedance, 10M ohms. 12 month guarantee. P&P \$2.

ONLY \$145 incl tax. (\$132 tax exempt)

Also available; The ideal pocket size digital multimeter, the SINCLAIR PDM 35, for only **\$61.50** incl. tax. (\$56 tax exempt) P&P \$2.

We also stock Soar, Sanwa and Arlec multimeters and Trio oscilloscopes, signal generators, etc.

- Philips AD12 K 12 TK 3 way 12" 40 watt speaker kits, complete, \$279.50 pr inc tax.
- Philips AD 8K 40 3 way 8" 40 watt speaker kits, complete, \$195 pr inc tax.
- Philips AD 8K 30 2 way 8" 30 watt speaker kits, complete, \$137.50 pr inc tax.
- Philips AD0 160 T8 stereo tweeter kits incl crossover caps, \$26.75 pr inc tax.
- Large range of Philips, Plessey-Foster and CTS speakers in stock.
- Philips EUY-10E 023LE Tape Printers, \$75 ea inc tax.
- South West Tech Keyboard kits, \$85 ea inc tax.
- Micro Honeywell Hall Effect Keyboards, \$120 ea inc tax.
- Daneva Keyboards (63 keys) \$45 ea inc tax.

WE NOW STOCK a huge range of semiconductors (incl micro chips) by all leading manufacturers at most competitive prices. Also a full range of capacitors, resistors, plugs, sockets, cables, connectors, instrument cases, transformers, Vero and Blob board, Continental breadboard, ETI and EA project boards, Chart Pak, potentiometers, in fact, just about everything electronic at Melbourne's leading electronic centre.

Make sure you visit our 'BARGAIN BAR' where you'll find:

- Transformers from 20c ea.
- Resistors from 1c ea.
- Capacitors from 2c ea.
- Pots from 5c ea.
- Diodes from 3c ea.
- Transistors from 5c ea.


Plus lots of other goodies at similar low, low prices.

Send 30c stamp for catalogue. All components can be supplied tax exempt through our new wholesale division, Ellistronics Wholesale P/L.

ELLISTRONICS

289 LATROBE ST, MELBOURNE 3000

Phone (03) 602-3282

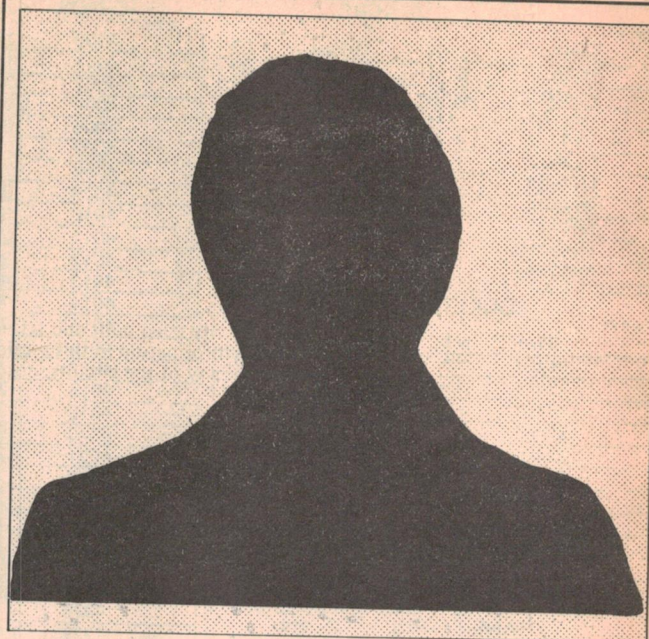

HELP!
ETI NEEDS
YOU!

WE ARE LOOKING for someone to work on ETI's project development staff. Applicants must be capable of, firstly, designing and breadboarding prototype circuits, and secondly, converting the proven circuits into well-built finished projects of the high standard necessary for publication.

Skills required include a good standard of workmanship, both electronically and mechanically. Ability to design pc boards would be an advantage, though limited experience in this area should not deter candidates from applying. A strong background in digital electronics is essential.

The majority of work is design and construction, but it will be necessary to liaise with other editorial staff in the presentation of the magazine project article.

The job is in our project development lab at Rushcutters Bay. Salary will depend upon experience and ability, but will be in the region of \$12 000.

For further information phone Phil Wait on (02) 33 4282, or write, enclosing a complete resume, to *Staff Vacancy, Electronics Today International, 15 Boundary Street, Rushcutters Bay, NSW 2011.*

Ideas for experimenters

These pages are intended primarily as a source of ideas. As far as reasonably possible all material has been checked for feasibility, component availability etc, but the circuits have not necessarily been built and tested in our laboratory. Because of the nature of the information in this section we cannot enter into any correspondence about any of the circuits, nor can we produce constructional details.



Electronics Today is always seeking material for these pages. All published material is paid for — generally at a rate of \$5 to \$7 per item.

'Cold-start' For CD Units

Many cars are fitted with cold-start coils, which operate at full current only on starting, then are fed via a ballast discarded when CD ignition is fitted, and the coil is run at 'full power' all the time. It's a simple matter to arrange for the cold-start circuit to operate a relay inside the CD unit which switches in a second capacitor C2 across the main

one, thus increasing the energy of the spark when the engine is starting. After starting, C2 is no longer in circuit and the main capacitor C1 alone supplies current to the coil, thus alleviating any charging problems with attendant loss of power at high revs.

RLA is any 12 volt relay, and C2 can have the same value as the existing capacitor C1, usually 470n or 1μ0.

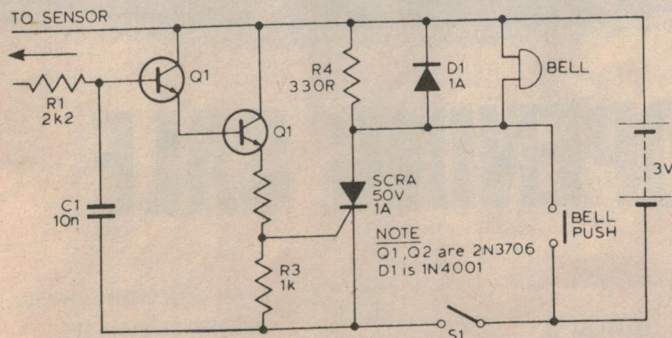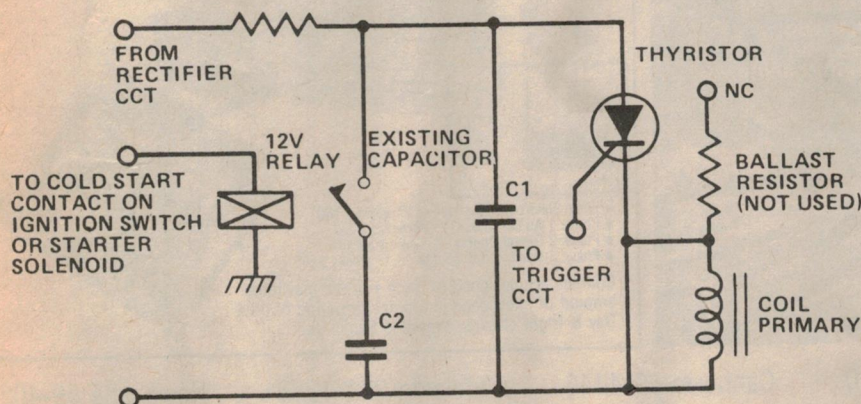

Rain Alarm/Door Bell

With S1 open the circuit functions as a doorbell. With S1 closed, rain falling on the sensor will turn on Q1, Q2 and the thyristor will trigger activating the bell. R4 provides the holding current for the

thyristor while D1 prevents any damage to the thyristor from back EMF in the bell coil. The sensor is made from 3 square inches of copper clad board with a razor cut down the centre. C1 prevents any pickup in the sensor leads.

FRG -7 RECEIVER



for amateurs,
novices
and
short-wave
listeners

Latest model includes fine-tune adjustment

MANUFACTURER'S TECHNICAL DATA

- Electronic band changing.
- 0.5-29.9 MHz continuous coverage.
- Uses Wadley loop (drift cancellation circuit) to derive synthesized heterodyne oscillator signal.
- LSB, USB, AM and CW.
- Frequency readout better than 10 KHz (readable to 5 KHz).
- Stability within 500 Hz during any 30-minute period after warm-up.
- Better than 0.7 V for 10 dB S/N/SSB and CW. Better than 2 V for 10 dB S/N/N AM.
- Selectivity 3 KHz at -6 dB, 7 KHz at -50 dB.
- Input Impedance high 0.5-1.6 MHz. 50-75 ohm 1.6-29.9 MHz.
- 234V AC 50-60 Hz or 12V DC external.
- Internal dry cell operation optional.
- Size 340 mm x 153 mm x 285 mm.
- Price **\$389.00**
- YAESU FRG 7 internal battery holder for 8 size 'D' cells, \$10.
- Prices include S/tax, freight extra. Prices and Specs subject to change.

Explore the wonderful world of short-wave listening. Hear broadcast stations, amateurs, ships, aircraft and morse code from stations all over the globe. Provides an introduction into many aspects of electronics and communications, CB's upgrade and widen your scope of operation. The FRG-7 will provide the means of listening to the amateur bands so that you can get the "feel" of amateur "ham" radio. You can tune into the morse practice transmissions and broadcasts conducted by the Wireless Institute of Australia; the Radio Amateurs representative Society in Australia. Write for a descriptive brochure.

Remember, BAIL has been the authorised agent for the YAESU MUSEN CO LTD since 1963. Our experience gathered over these years, and a lifelong participation in electronics, places us in a superior position to handle warranty, after sales service and advice on the wide range of Yaesu amateur radio equipment.




Avoid unauthorised handlers of equipment as it generally results in the supply of non-export 110V sets with 2-core AC power cables, instruction manuals printed in Japanese, lack of service etc. Consult us for advice on your requirements in the field of short-wave listening and amateur radio.

For further information call or write to the Amateur radio specialists.

Australian YAESU Agents since 1963.

bail 60 Shannon St., Box Hill North
ELECTRONIC SERVICES Vic. 3129
Ph 89 2213

COLOUR TV Games



teleplay

AUSTRALIA

PO Box 40, North Balwyn, 3104, Victoria.

KITS

Colour tank battles, \$48.50
B&W road race, \$28.00
Colour wipeout/breakout, \$42.50

CHIPS

AY-3-8610 (10 games), \$15.50L AY-3-8603 (road race), \$15.80
AY-3-8605 (warfare), \$16.50
AY-3-8606 (wipeout/breakout), \$16.50
AY-3-8607 (shooting gallery), \$16.80
Colour encoder module, \$9.80
With 4.43MHz crystal, \$13.00

CRYSTALS

1MHz, \$6.50
3.579 MHz, \$2.60
4.43MHz, \$4.10


Kits include all parts, just add controls and case.

WATCHES

12 function chronograph LCD, \$42.50.

Prices include postage within Australia.

AUDIO ENGINEERING & PRODUCTION

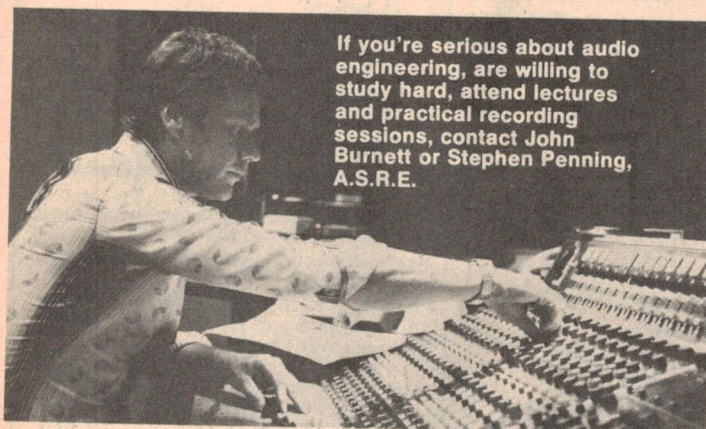

If you're serious about audio engineering, are willing to study hard, attend lectures and practical recording sessions, contact John Burnett or Stephen Penning, A.S.R.E.

SCHOOL OF ELECTRONICS



- Basic Electronics Course — 12 weeks \$180
- Phase 1 Audio Course — 12 weeks \$180
- Phase 2 Digital Course — 12 weeks \$180
- Phase 3 Radio & CB Course — 12 weeks \$180

Courses are designed to teach you the maximum amount of knowledge in a practical period of time. Day & Night classes, Weekend Seminars.

Sydney 922-6301 . . . Melbourne 95-9510 . . . Canberra 80-4446 . . . Adelaide 261-1383 . . . Newcastle 69-4021

ECONOMIC DIGITAL
CONTROL
announce their

PRE-OPENING SALE

Send us a shopping list. Orders and enquiries (including Phone No.) to

**ECONOMIC
DIGITAL
CONTROL**

PTY. LTD.

PO Box 817, Crows Nest
NSW, 2065

2102 RAMS.....	\$1.50
2144 RAMS.....	\$13.00
2513 U/CASE DUAL SUPPLY.....	\$10.00
2708 EPROMS.....	\$13.00
6502 MICRO P.....	\$13.25
63 KEY KEYBOARD, UNENCODED.....	\$45.00
19 KEY KEYPAD, 0-9 plus ABCDEF.....	\$15.00

Prices don't include sales tax.


ORDERS: Minimum \$25
— Money with order.

 ACCEPTED

**DISCOUNTS AVAILABLE
ON QUANTITY ORDERS**

Prices subject to change without notice


Ideas for experimenters

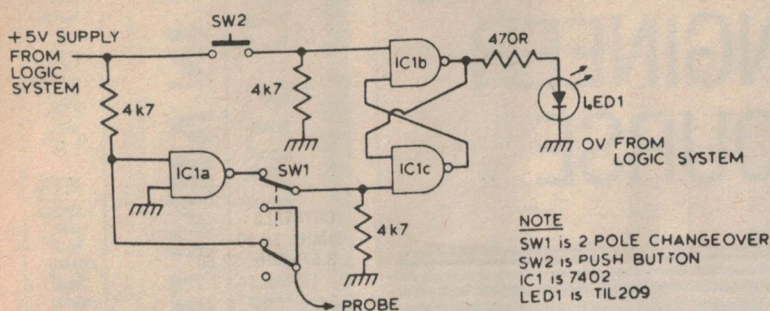

Logic Noise Detector

Ever since the advent of binary logic, spurious noise spikes and pulses have been the curse of the designers of even elementary systems. This circuit will help detect 'noisy' logic levels. With SW1 in position 1, any logic zero spikes

occurring on a steady logic '1' will set the R-S latch and the LED will be illuminated. With SW1 in position 2, an extra inverter is brought in, and the circuit will be triggered by any logic '1' spikes.

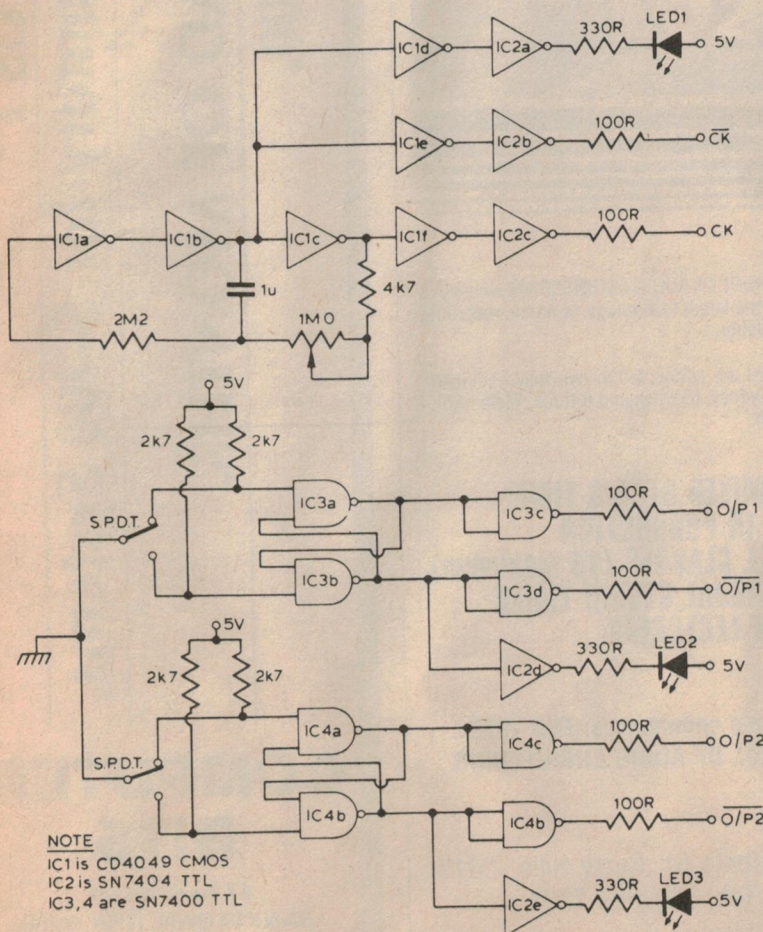

Test Unit for Sequential Logic

Any one testing a sequential logic circuit requires input pulses free of contact bounce. This unit does this, providing two switched, jitter-free outputs and a 'slow' variable speed clock. The complements of these signals are also provided.

The components shown give the clock a frequency range of 1-200 Hz. The clock's buffered output will drive up to two TTL inputs.

The 100R resistors on all outputs provide some measure of accidental short circuit protection.

ELECTROCRAFT

PTY. LTD.

68 Whiting Street, Artarmon, 2064
Telephone 438-4308. 438-3266


Far out TV reception for caravan owners.

ELECTROCRAFT antenna kits are the simplest method of providing your RV with excellent TV and radio reception. The modern space age design and compact construction give these antennas an attractive appearance to go with today's handsome RV's. The unique circuitry of these antennas will give you the best possible color and black and white reception on all 82 VHF/UHF TV channels and AM/FM radio.

All four models raise lower and rotate from inside the vehicle. When in travel position, all exposed parts are snug against roof of vehicle protected from damage by tree limbs and wires.

For years of trouble free service all exposed parts are either stainless steel, aluminium or tough ABS plastic and will never stain or corrode finish of vehicle. Easy to install on most RVs with only simple hand tools. Cranks up to a maximum height of 44" above roof and extends only 4" above roof while in travel position.

RVH-3 DELUXE MODEL WITH BUILT-IN SPLITTER & 12VDC RECEPTACLE.

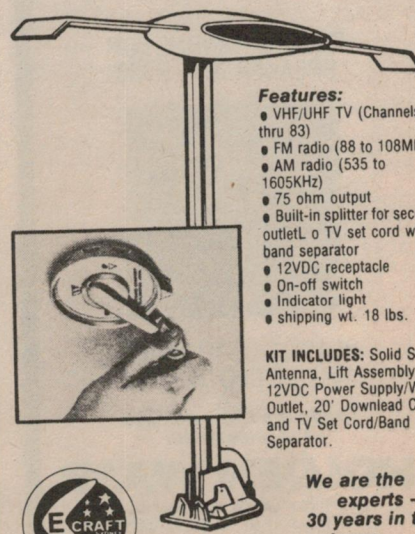

- Features:**
- VHF/UHF TV (Channels 2 thru 83)
 - FM radio (88 to 108MHz)
 - AM radio (535 to 1605KHz)
 - 75 ohm output
 - Built-in splitter for second outlet L or TV set cord with band separator
 - 12VDC receptacle
 - On-off switch
 - Indicator light
 - shipping wt. 18 lbs.



KIT INCLUDES: Solid State Antenna, Lift Assembly, 12VDC Power Supply/Wall Outlet, 20' Downlead Cable and TV Set Cord/Band Separator.

We are the experts - 30 years in the antenna business.





Open Mon. to Fri. 8-5. Sat. 8.30-12.


Re-an cabinet fittings




CABINET FEET R332




SOCKET RECESS PLATE R303



CASTOR CUP R370



RECESS HANDLE FOR
SPEAKER BOX R338




BLACK SEE-THROUGH
GRILLE CLOTH G111

Send for a free catalogue
and price list to:

HOLDEN WASP
INTERNATIONAL

PO Box 532, Marrickville, 2204.
39 Chalder St., Marrickville,
or Phone (02) -60-3488.

RECORDING ENGINEER COURSE

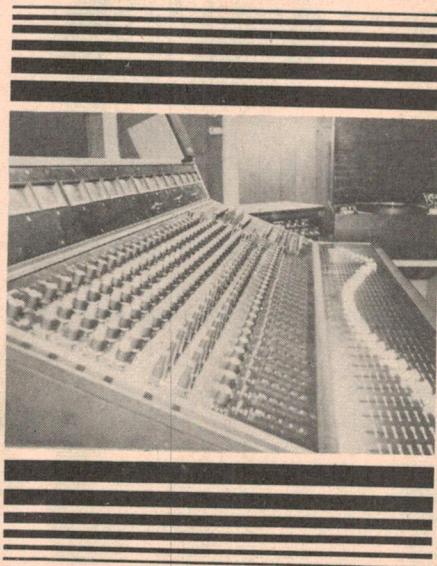

At the SCHOOL OF AUDIO ENGINEERING where you
can learn the latest technology of music recording
and production.

The classes are conducted in two fully equipped
studios (Sydney 16 track and 8 track; Melbourne 8
track) with:

- UNLIMITED STUDIO TIME*
- JOIN IN PRODUCTION
- SMALL CLASSES (15 maximum)
- INDIVIDUAL STUDIO TIMES
- GUEST LECTURERS

Course commences: FEB 1979
SCHOOL OF AUDIO ENGINEERING

SYDNEY

420 Elizabeth St, Surry Hills. 2010.
Tel: (02) 699-7931

MELBOURNE

36 Rae St, Nth. Fitzroy. 3068.
Tel: (03) 481-1627

*Sydney only

DISCUS I™

Full-size Floppy Disk Memory for S-100 Systems.

UP IN MINUTES INSTEAD OF MONTHS.
AND STILL UNDER \$1,000.

COMPUTER BITS


47 Birch Street,
BANKSTOWN. NSW. 2200.

A DIVISION OF AUTOMATION
STATHAM PTY. LTD.


(02) 709-4144. Telex AA26770.
Trade Enquiries Welcome.

Ideas for experimenters

IC1-QUAD 2 INPUT NAND GATE

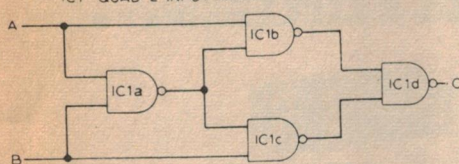

IC2-QUAD 2 INPUT NOR GATE

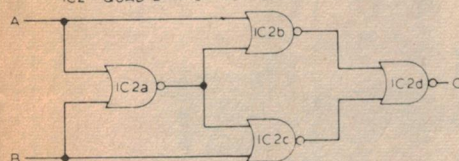

Exclusive OR and NOR gates

When constructing logic circuits which need either an exclusive OR or exclusive NOR gate, and one is not available, the following arrangement of NAND or NOR gates can produce the required results. The circuits can be constructed using standard TTL or CMOS gates.

IC1 TRUTH TABLE

A	B	C
0	0	0
0	1	1
1	0	1
1	1	0

IC2 TRUTH TABLE

A	B	C
0	0	1
0	1	0
1	0	0
1	1	1


2102 Memory Tester

This circuit provides for the testing of 1024 bit X 1 memories, such as the 2102 series, in two modes. Mode-1 cycles the memory continuously through write and read, alternately writing zeroes and ones then reading to ensure the write was successful. Mode-2

allows the write of a signal onto the memory, then continuously reads it to ensure the data is stable.

In both modes, the output from the memory is compared with what should be there, and if there is a difference, an LED flashes, accompanied by a click from the speaker. In mode-2, on power on, a continuous noise will be heard from the speaker, on pressing the 'WRITE' button this should vanish. Similarly, a brief pulse of noise will be heard in mode-1 before the write is completed. The oscillator frequency is about 20 kHz with components shown.

In mode-2, when the supply voltage drops below 4.5V memory is not stable for more than a fraction of a second, although this does not show up using mode-1.

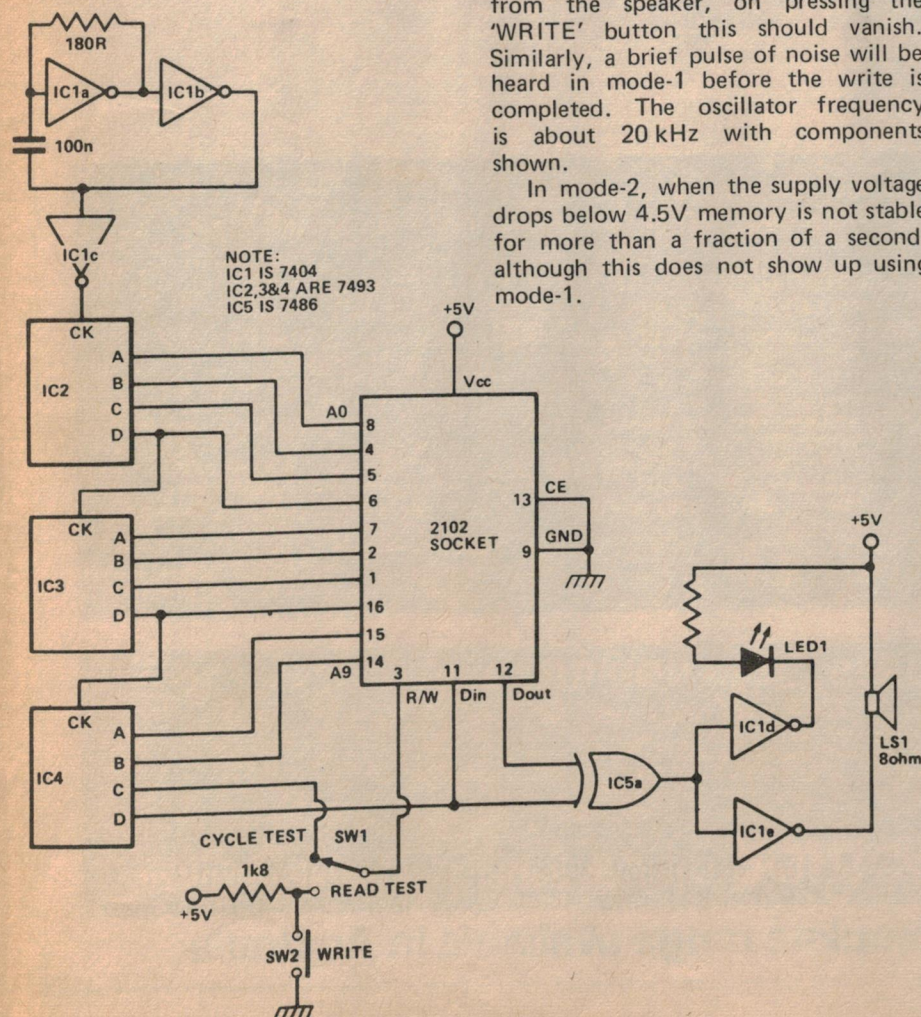

HOTEL CAR PARK
BEXLEY NORTH
502-2094

•
Canon Calculators
Peak and Hioki
Multimeters
Audio leads & plugs

•
**ALL QUALITY
COMPONENTS**

•
FEBRUARY SPECIAL
Motorola 555 Timers
40c ea.

•
WE STOCK
COMPONENTS FROM:

**IRH
RALMAR
A & R SOANAR
SILICON VALLEY
Plus many more**

MAIL ORDERS

18 Sarsfield Circuit,
Bexley North. 2207

SEALED, RECHARGEABLE, MAINTENANCE-FREE BATTERIES...



Internationally accepted YUASA BRAND batteries have such features as —

- no maintenance, never need topping up • unspillable, may be charged/discharged in any position • wide range of capacities.

SEALED NICKEL CADMIUM BUTTON CELLS

- Various types available for — Standard rate discharge High rate discharge Trickle charge
- Large range, 1.25 cells available in single or multi cell stacks from 10 MAH to 500 MAH
- May be charged and discharged over a wide temperature range



SEALED NICKEL CADMIUM SINTERED PLATE CELLS

- Various types available for — High temperature operation, Rapid recharging, High rate discharge
- Self resealing gas release safety venting system
- Large range 1.25 volt cells from 140 MAH to 3500 MAH
- 'AA', 'C' and 'D' sizes available



SEALED LEAD CALCIUM BATTERIES

- Long life, 1200 cycles or 5 years float service life possible
- Self resealing gas release safety venting system
- May be continuously cycled or float charged
- May be charged and discharged over a wide temperature range
- Long shelf life, capable of prolonged open circuit standing
- Large range — 6 volts from 1.2 A.H. to 10 A.H. 12 volts from 1.9 A.H. to 20 A.H.

ADDRESS ALL ENQUIRIES TO:

New South Wales: I.E.I. Pty. Ltd. 109 Alexander Street Crows Nest, 2065 Phone: 438 2722, 438 2932

Victoria: I.E.I. Pty. Ltd. 29 Stafford Street Huntingdale, 3166 Phone: 544 8411

Queensland: Bob McKnight (Trading) 23 O'Connell Terrace Bowen Hills, 4006 Phone: 52 7600

Western Australia: R.F. Datodi & Associates 16 Prowse Street West Perth, 6005 Phone: 321 4429

South Australia: Aquavia Controls Pty. Ltd. 61A Baden Terrace O'Sullivan's Beach, 5166 Phone: 384 1444

Tasmania: George Harvey Electric Pty. Ltd. 76 York Street Launceston, 7250 Phone: 31 6533. 162-164 Argyle Street Hobart, 7000 Phone: 34 2233

IMPORTED BY **CHLORIDE** Chloride Batteries Australia Limited
now the most complete range available in Australia

RADCOM

constructor components

EVERYTHING FOR
THE CONSTRUCTOR
AT ONE SHOP
AT PRICES TO SUIT
YOUR BUDGET

SPECIAL!
Make your own PCB's
with our super kit.

ONLY **\$8-50**

SILICON VALLEY STOCKISTS

- CAPACITORS —
- RESISTORS —
- POTS —
- SWITCHES —
- PLUGS —
- SOCKETS —
- PANEL LAMPS —
- TRANSISTORS —
- DIODES —
- BOXES —
- LEDS —
- IC's —

*Try us for the
hard-to-get components*

Block Capacitors
Silver Micas
High Voltage
etc, etc

Trading hours from 1st Jan '79.
WEEKDAYS: 9am - 5.45pm
SATURDAYS: 9am - 12 noon
TRADE ENQUIRIES WELCOME

Cnr. Eldridge & Willfox Rds.
BANKSTOWN, NSW.
709-4706

NORTRONICS

AUDIO & DIGITAL TAPE HEADS



for long life extended response

- Replacement heads for cassette decks, reel to reel decks, cartridges and cassette recorders. Also professional recorders and duplicators.
- Will fit AMPEX, SCULLY, TEAC, ATC, GATES, PENTAGON, IFONICS and many more.
- Complete range of Alignment tapes for cassette, reel to reel and cartridge decks.
- REGULAR MAINTENANCE ENSURES CONTINUED OPTIMUM PERFORMANCE. Nortronics manufactures a full range of audio care products.



- NORTRONICS audio care products are designed to care for and maintain your valuable recording equipment.
- SEND TWO 20c STAMPS FOR OUR FREE BROCHURE ON THE COMPLETE NORTRONICS RANGE.

E.I. EMAC INDUSTRIES Pty.Ltd.

9 Meriton Place, Clayton South,
3169. Tel: 544-5157

CARTRIDGES & STYLI

CARTRIDGES

ADC ZLM.....	\$125
ADC XLM MK3.....	\$99
ADC VLM MK3.....	\$82
ADC QLM 36 MK3.....	\$75
ADC QLM 34 MK3.....	\$58
ADC QLM 32 MK3.....	\$42
ADC QLM 30 MK3.....	\$30
DENNON DL107.....	\$75
DENNON DL109R.....	\$85
DENNON DL 109D.....	\$112
DENNON DL103.....	\$120
AU310 Trans for DL103.....	\$70
DENNON DL103S.....	\$155
AU320 Trans for DL103S.....	\$90
Shure V15 Type IV.....	\$159
Shure V15 Type III.....	\$125
Shure M95ED.....	\$58
Shure M91ED.....	\$39
Shure M70EJ.....	\$16
Shure M55E.....	\$25
Shure M44E.....	\$22
Shure M24H.....	\$79
Shure M70B.....	\$12
Shure M75CS.....	\$19
Shure M44-7.....	\$21
Jelco MC9.....	\$12
Jelco MC-14D.....	\$24
Jelco MC-14E.....	\$39
Jelco MC-45E.....	\$80

STYLI

Shure VW35E.....	\$56
Shure N95ED.....	\$49
Shure N91ED.....	\$39
Shure N70EJ.....	\$11
Shure N55E.....	\$21
Shure N44E.....	\$18
Shure N24H.....	\$52
Shure N70B.....	\$7
Shure N75C.....	\$15
Shure N44-7.....	\$16
Jelco ND-9.....	\$8
Jelco ND-14D.....	\$12
Jelco ND-14E.....	\$28
Jelco ND-45E.....	\$45

TONE ARMS

ADC LMF-1.....	\$179
ADC LMF-2.....	\$189
Grace 707.....	\$89
Jelco SA50.....	\$39
Jelco SA200.....	\$69

ACCESSORIES

Headshell JS-10 Blk A1.....	\$8.50
Headshell JS-20W Nat A1.....	\$9.50
Headshell JS-50 Solid Blk A1.....	\$11.75
Stylus Press Gauge.....	\$4.95
Static Discharge mat.....	\$7.95
Stylus Microscope.....	\$4.00
Static Eliminator Gun.....	\$19.95

Goods listed are offered subject to availability. Prices include postage anywhere in Australia. Write, phone or call in. Send SAE for full cartridge and styli price list.

CAMPBELLTOWN HI-FI

107 Macquarie Ave,
Campbelltown, NSW 2560
Open all day Saturday

Ph. (046) 25-6067

READERS' LETTERS

No charge for replies but a foolscap-size stamped addressed envelope must be enclosed. Project queries can only be answered if related to item as published. We cannot assist if project is modified nor if components are otherwise than specified. We regret we cannot answer readers' enquiries by telephone.

MICROFILM

Microfiche editions of this publication are available by annual subscription from Microsystems Pty Ltd, PO Box 188, North Sydney, NSW. 2060.

SUBSCRIPTIONS AND BACK ISSUES

ETI subscriptions cost \$19.00 per year (inc. postage) within Australia. Cost elsewhere is \$24.60 (inc. postage — surface mail). Airmail rates on application.

Back issues cost \$1.25 each plus 45 cents post and packing.

We can supply **only** the following issues.

1976: Nov., Dec. 1977: All issues except Jan, Feb, March. 1978: All issues.

Photostats are available of any article ever published in ETI. We charge a flat \$2.00 regardless of page quantity from any one issue of ETI. Thus if the article is in three issues the cost is \$6.00. Send orders to address below.

Binders \$4.50 plus 90c post NSW, \$2.00 other States.

COPYRIGHT

The contents of Electronics Today International and associated publications is fully protected by the Commonwealth Copyright Act (1968).

Copyright extends to all written material, photographs, drawings, circuit diagrams and printed circuit boards. Although any form of reproduction is a breach of copyright, we are not concerned about individuals constructing projects for their own private use, nor by pop groups (for example) constructing one or more items for use in connection with their performances.

Commercial organisations should note that no project or part project described in Electronics Today International or associated publications may be offered for sale, or sold, in substantially or fully assembled form, unless a licence has been specifically obtained so to do from the publishers, Modern Magazines (Holdings) Ltd or from the copyright holders.

LIABILITY

Whilst every effort has been made to ensure that all constructional projects referred to in this edition will operate as indicated efficiently and properly and that all necessary components to manufacture the same will be available, no responsibility whatsoever is accepted in respect of the failure for any reason at all of the project to operate effectively or at all whether due to any fault in design or otherwise and no responsibility is accepted for the failure to obtain any component parts in respect of any such project. Further, no responsibility is accepted in respect of any injury or damage caused by any fault in the design of any such project as aforesaid.

A MODERN MAGAZINES PUBLICATION

PRODUCTION

Art Director:	Clive Davis
Assembly:	Bill Crump/Simon Bracken
Production Manager:	Bob Izzard
Subscriptions & Circulation:	John Oxenford
Project Design:	Nebula Electronics
Acoustical Consultants:	Louis A. Challis & Assoc.

Sydney:	Modern Magazines Bob Taylor (Manager), Geoff Petschler (NSW Manager), 15 Boundary St., Rushcutters Bay 2011. Tel: 33-4282.	Perth:	Aubrey Barker, 133 St. George's Terrace, Perth. 6000. Tel: 322 3184.
Melbourne:	Modern Magazines Tom Bray (Manager), Poppe Davis, Suite 24, 553 St. Kilda Rd, Melbourne. Tel: 51-9836.	Hobart:	H.W. Lincone, 23 Lord St, Sandy Bay, Tasmania. 7005.
Brisbane:	Modern Magazines Geoff Horne, 60 Montanus Drive, Bellbowrie, Qld. 4070. Tel: 202 6229.	Tokyo:	Genzo Uchida, Bancho Media Service, 15 Sanyocho, Shintoku-Ku, Tokyo 160.
Adelaide:	Harry Hastwell Media 399 Glen Osmond Rd, Glen Osmond, S.A. 5064. Tel: 79-1869.	London:	Electronics Today International, 25-27 Oxford St, London, W1R 1RF. Tel: 01-434-1781/2.
		U.S.A.:	Elmatex International, PO Box 34607, Los Angeles, CA. 90034. Tel: (213) 821 8581. Telex: 18 1059 (Elmatextint USA)

Electronics Today International is published by Modern Magazines (Holdings) Ltd, 15 Boundary St., Rushcutters Bay, NSW 2011. It is printed (in 1979) by Wilke & Co., Browns Rd, Clayton, Victoria and distributed by Australian Consolidated Press.

ADVERTISERS INDEX

A&R Soanar	28
Applied Technology	30
Advanced Computer Products	75
Auditec	59
Automation Statham	98
Ampec Engineering	80
Bail Electronics	95
Cema/Silicon Valley	88-89
Centaur Industries	60
Chloride Batteries	100
Campbelltown Hi-Fi	101
Cooper Tool Group	74
Convoy International	8
Dick Smith	10, 50-51
Dicker, J.W.	65
D.R. Hi-Fi & Electronics	40
Diggerman Electronics	64
Electronic Mailbox	70
Electronic Calculator Discounts	22
Emona Electronics	29
Ellistronics	94
Electrocra	97
Emac Industries	101
Eatom Electronics	92
Electronic Agencies	82
Economic Digital Control	96
Findon Machinery Co	82
Go Electronics	99
General Electronic Services	74
Hagemeyer	2, 103
Holden Wasp	98
Inter. Correspondence Schools	18
IC's Unlimited	93
Jaycar	41
McGills Newsagency	40
Maurice Chapman/Debchap	68
National Panasonic	104
Orbit Electronics	59
Pioneer Electronics	19
Professional Products	85
Pre Pak Electronics	69
Rod Irving Electronics	25, 83
Radio Parts Group	35
Roland Australia	28
Rave Electronics	92
Radcom	101
Reg Geary & Associates	33
Rothmans	86
Sansui	20
Semcon Microcomputers	68
SM Electronics	64
School of Electronics	96
School of Audio Engineering	98
Stewart Electronics	27
Tandy	6
Trio-Kenwood Australia	78
Tasman Electronics	36
Transient Electronics	41
TV Replacements	92
Teleplay Australia	96
Vicom	76
Warburton Franki	4

THE JVC RECEIVER.

Every bit as revolutionary as they look, and then some.

In our case, looks are never deceiving. Because all our new DC integrated stereo receivers combine unprecedented, revolutionary styling with unique electronic design features that reflect JVC's more than 50 years' experience in audio development and innovation.

DC Power Amplifier Design

All four new JVC receivers feature DC amplifier circuitry. They offer virtually distortion-free performance (0.03% THD) throughout the entire audible spectrum. As a result, the sound you hear is clearer, cleaner and crisper. In addition, your speakers are protected with the Triple Power Protection circuit and you can monitor output wattage with dual power meters. Choose from 120, 85, 60 and 35 watts/channel.*

SEA all the way

All four receivers offer JVC's exclusive built-in SEA five-zone graphic equalizer for more complete control of



the music spectrum than conventional tone controls. You can attenuate or accentuate any of five separate musical bands, and as an added feature, we've incorporated a special button so that the SEA circuit can be switched to your tape deck.

Pushbutton Source Selectors


A horizontal panel of pushbuttons provides total control over all functions. And brilliantly illuminated LEDs instantly indicate the program source. Professional-type slider controls set volume and balance. Combine all these exclusive features with high sensitivity and tuning precision, thumb control tuning wheel and accurate dual-metering and you'll see just how revolutionary the new JVC DC integrated stereo receivers are. Play one at your JVC dealer soon.

For details on all JVC Hi-Fi Equipment, write to JVC Advisory Service, Box 307, North Ryde, N.S.W. 2113.


For pure Hi-Fi entertainment!

JVC

the right choice

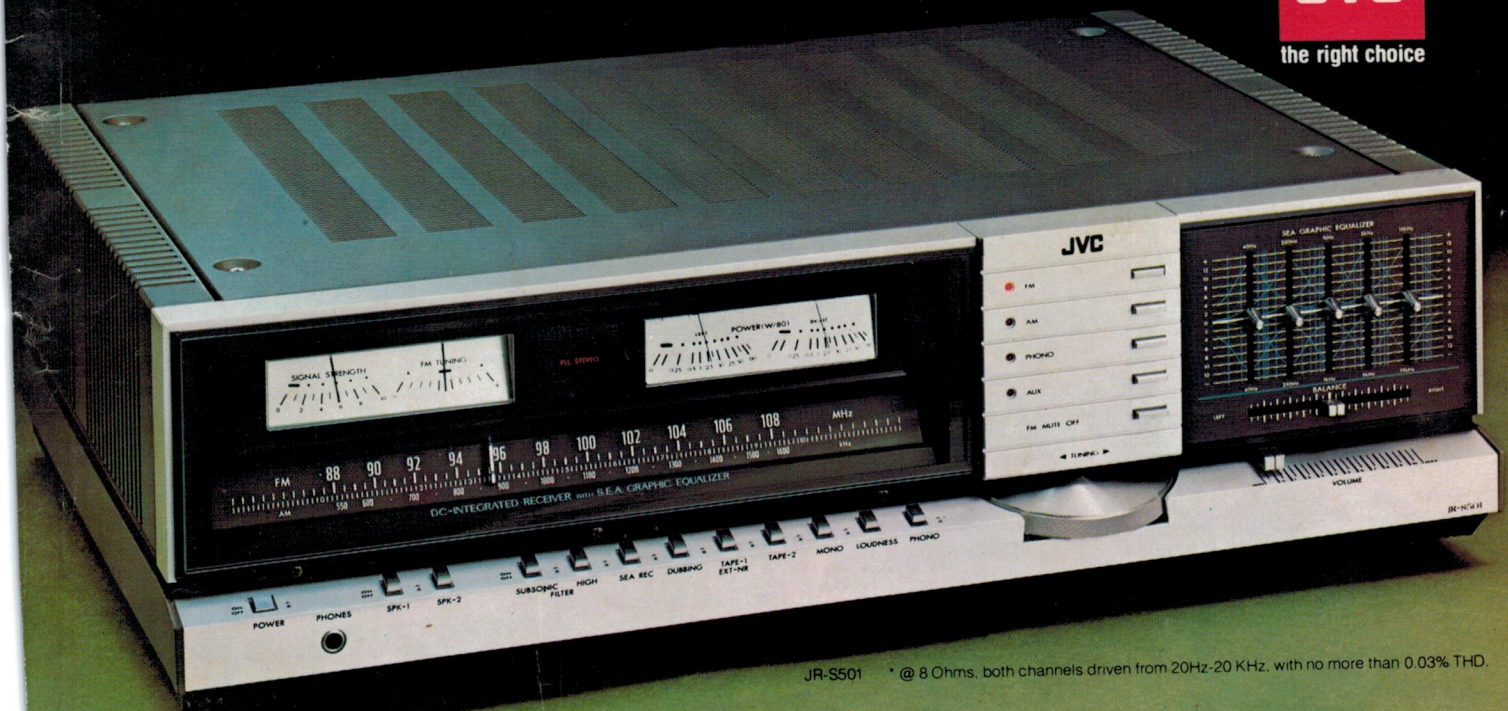

JR-S501 * @ 8 Ohms, both channels driven from 20Hz-20 KHz. with no more than 0.03% THD.

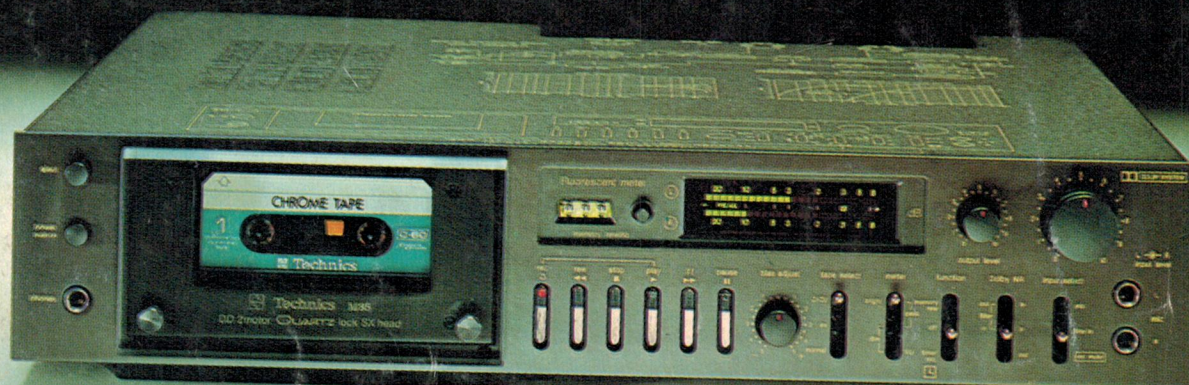

Yet another first for Technics.

Technics have been the innovators of so many outstanding new concepts in audio technology. And they have done it again: the RS-M85, the world's first quartz locked direct-drive flat type cassette deck.

It has so many design features — like the rugged two-motor tape drive including a direct-drive capstan motor; feather-touch IC logic controls; radically new style peak/VU meters; and an incredible wow and flutter rating of just 0.035% (WRMS).

The bar graph FL (fluorescent) level meters are the most novel features of the RS-M85.

Electronically controlled, so response time is instantaneous, these make conventional needle-

type meters obsolete. Highly accurate, the FL meters give direct parallel readout for instant comparison between channels.

The capstan drive has a quartz-locked servo system that keeps tape speed constant. The record/playback head is laminated with Sendust, a recently developed material which is exceptionally hard and durable. Wide frequency response and negligible distortion contribute to the high quality in sound reproduction.

The RS-M85 is just one of the exciting models from the range of Technics cassette decks. See them for yourself at your dealer.

 **Technics**
hi-fi